Developing Mobile Applications with ADOBE® FLEX® and ADOBE® FLASH® BUILDER™

Legal notices

For legal notices, see http://help.adobe.com/en_US/legalnotices/index.html.

Contents

Chapter 1: Getting started
Getting started with mobile applications 1
Differences in mobile, desktop, and browser application development 4

Chapter 2: Development environment
Create an Android application in Flash Builder 8
Create an iOS application in Flash Builder 10
Create a BlackBerry Tablet OS application in Flash Builder 10
Create an ActionScript mobile project 11
Develop ActionScript extensions 11
Set mobile project preferences 13
Connect Google Android devices 16
Apple iOS development process using Flash Builder 18

Chapter 3: User interface and layout
Lay out a mobile application 23
Handle user input in a mobile application 29
Define a mobile application and a splash screen 31
Define views in a mobile application 36
Define tabs in a mobile application 47
Define navigation, title, and action controls in a mobile application 50
Use scroll bars in a mobile application 56
Define menus in a mobile application 61
Display the busy indicator for long-running activity in a mobile application 65
Add a toggle switch to a mobile application 68
Adding a callout container to a mobile application 70
Define transitions in a mobile application 83
Select dates and times in a mobile application 88
Use a spinner list in a mobile application 99

Chapter 4: Application design and workflow
Enable persistence in a mobile application 111
Support multiple screen sizes and DPI values in a mobile application 115

Chapter 5: Text
Use text in a mobile application 129
User interactions with text in a mobile application 131
Support the screen keyboard in a mobile application 132
Embed fonts in a mobile application 136

Chapter 6: Skinning
Basics of mobile skinning 137
Create skins for a mobile application 141
Apply a custom mobile skin 149

Chapter 7: Run and debug mobile applications
Manage launch configurations 151
Run and debug a mobile application on the desktop 152
Run and debug a mobile application on a device 153

Chapter 8: Package and export a mobile application
Export Android APK packages for release 157
Export Apple iOS packages for release 158

Chapter 9: Deploy
Deploy an application on a mobile device 160
Develop and deploy a mobile application on the command line 161

Chapter 1: Getting started

Getting started with mobile applications

The Adobe Flex 4.5 release brings Flex and Adobe Flash Builder to smartphones and tablets. Leveraging Adobe AIR, you can now develop mobile applications in Flex with the same ease and quality as on desktop platforms.

Many existing Flex components have been extended to work on mobile devices, including the addition of support for touch-based scrolling. Flex 4.5 also contains a set of new components designed to make it easy to build applications that follow standard design patterns for phones and tablets.

Flash Builder has also been updated to add new features to support application development for mobile devices. With Flash Builder, you can develop, test, and debug applications on the desktop, or directly on your mobile device.

Adobe Evangelist Mark Doherty posted a video about building applications for the desktop, mobile phones, and tablets.

Adobe Evangelist James Ward posted a video about Building Mobile Apps with Flex 4.5.

Adobe Community Professional Joseph Labrecque blogged about a Mobile Flex 4.5 Demonstration.

Flash developer Fabio Biondi created an AIR-based YouTube Player for Android devices using Flash Builder.

Design a mobile application

Because of the smaller screen sizes available on mobile devices, mobile applications typically follow different design patterns from browser-based applications. When developing for mobile applications, you typically divide the content into a series of views for display on a mobile device.

Each view contains components that are focused on a single task or that contain a single set of information. The user typically "drills down", or changes, from one view to another by tapping components in the view. The user can then use the device's back button to return to a previous view, or build navigation into the application.

In the following example, the initial view of the application shows a list of products:

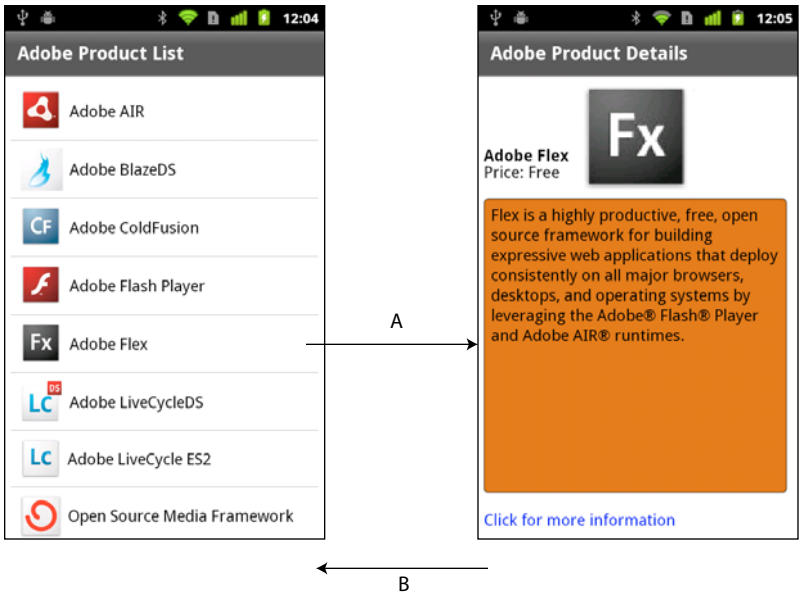

A. Select a list item to change views in the application. B. Use the device's back button to return to the previous view.

The user selects a product in the list to obtain more information. The selection changes view to a detailed description of the product.

If you are designing an application for mobile, web, and desktop platforms, you typically design separate user interfaces for each platform. However, the applications can share any underlying model and data access code across all platforms.

Build applications for phones and tablets

For a tablet application, you are not as concerned with screen size limits as you are with phones. You do not have to structure a tablet application around small views. Instead, you can build your application using the standard Spark Application container with the supported mobile components and skins.

Note: *You can create an application for a mobile phone based on the Spark Application container. However, you typically use the ViewNavigatorApplication and TabbedViewNavigatorApplication containers instead.*

Create a mobile project in Flash Builder for tablets just as you do for phones. Tablet and phone applications require the same mobile theme to benefit from the components and skins optimized for mobile applications.

Author mobile applications in Flash Builder

Flash Builder brings a productive design, build, and debug workflow to mobile development. The goal of the mobile features in Flash Builder is to make it as easy to develop an ActionScript- or Flex-based mobile application as it is to develop a desktop or web application.

Flash Builder offers two options for testing and debugging. You can launch and debug the application on the desktop using the AIR Debug Launcher (ADL). For greater control, launch and debug the application directly on a mobile device. In either case, you can use the Flash Builder debugging capabilities, including setting breakpoints and examining the application's state using the Variables and Expressions panels.

When your application ready for deployment, use the Export Release Build process, just as you would to prepare desktop and web applications. The main difference is that when you export a release build of a mobile project, Flash Builder packages the build as a native installer, not as an .air file. For example, on Android, Flash Builder produces an .apk file that looks the same as a native Android application package. The native installer enables AIR-based applications to be distributed the same way as native applications on each platform.

Deploy mobile applications in AIR

Deploy mobile applications built in Flex using Adobe AIR for mobile devices. Any device on which you want to deploy a mobile application must support AIR.

Your applications can take full advantage of the integration of AIR with the mobile platform. For example, a mobile application can handle a hardware back and menu button, and access local storage. You can also take advantage of all features that AIR offers for mobile devices. These features include geolocation, accelerometer, and camera integration.

On a mobile device, it is not necessary to install AIR before you run an application built in Flex. The first time a user runs an application built in Flex, the user is prompted to download AIR.

To familiarize yourself with AIR, and for more information on the capabilities of AIR, see the following:

- About Adobe AIR
- AIR application invocation and termination
- Working with AIR runtime and operating system information
- Working with AIR native windows
- Working with local SQL databases in AIR

When developing mobile applications, you cannot use the following Flex components for AIR: WindowedApplication and Window. Instead, use the ViewNavigatorApplication and TabbedViewNavigatorApplication containers. When developing mobile applications for tablets, you can also use the Spark Application container.

For more information, see Using the Flex AIR components and "Define a mobile application and a splash screen" on page 31.

Use the Mobile theme in your application

A *theme* defines the look and feel of an application's visual components. A theme can define something as simple as the color scheme or common font for an application, or it can define a complete reskinning of all the components used by the application.

You can set CSS styles on Flex components only if the current theme includes those styles. To determine if the current theme supports the CSS style, view the style's entry in ActionScript 3.0 Reference for the Adobe Flash Platform.

Flex supports three primary themes: Mobile, Spark, and Halo. The Mobile theme defines the default appearance of Flex components when you create a mobile application. To make some Flex components compatible with the Mobile theme, Adobe created new skins for the components. Therefore, some components have skins specific to a theme.

Applications built with Flex can target different mobile devices, each with different screen sizes and resolutions. Flex simplifies the process of producing resolution-independent applications by providing DPI-independent skins for mobile components. For more information on mobile skins, see "Basics of mobile skinning" on page 137.

For more information about styles and themes, see Styles and themes and "Mobile styles" on page 137.

Community resources

Read about the new features in Flex 4.5 and Flash Builder 4.5 in:

- Introducing Adobe Flex 4.5 SDK by Adobe Product Manager, Deepa Subramaniam
- Mobile development using Adobe Flex 4.5 SDK and Flash Builder 4.5 by Adobe Product Designer, Narciso Jaramillo.
- What's new in Flash Builder 4.5 by Adobe Product Manager, Andrew Shorten

The Flex Developer Center contains many resources that can help you start building mobile applications using Flex 4.5:

- Getting Started articles, links, and tutorials
- Samples of real applications built in Flex
- The Flex Cookbook, which contains answers to common coding problems
- Links to the Flex community and to other sites devoted to Flex

Another resource is Adobe TV, which contains videos by Adobe engineers, product evangelists, and customers about application development in Flex. One of the videos available is Build your first mobile application in Flash Builder 4.5.

Differences in mobile, desktop, and browser application development

Use Flex to develop applications for the following deployment environments:

Browser Deploy the application as a SWF file for use in Flash Player running in a browser.

Desktop Deploy a standalone AIR application for a desktop computer, such as a Windows computer or Macintosh.

Mobile Deploy a standalone AIR application for a mobile device, such as a phone or a tablet.

The Flash Player and AIR runtimes are similar. You can perform most of the same operations in either runtime. Besides allowing you to deploy standalone applications outside a browser, AIR provides close integration with the host platform. This integration enables such features as access to the file system of the device, the ability to create and work with local SQL databases, and more.

Considerations in designing and developing mobile applications

Applications for mobile touchscreen devices differ from desktop and browser applications in several ways:

- To allow for easy manipulation by touch input, mobile components generally have larger hit areas than they do in desktop or browser applications.
- The interaction patterns for actions like scrolling are different on touchscreen devices.
- Because of the limited screen area, mobile applications are typically designed with only a small amount of the user interface visible on the screen at one time.
- User interface designs must take into account differences in screen resolution across devices.
- CPU and GPU performance is more limited on phones and tablets than on desktop devices.
- Owing to the limited memory available on mobile devices, applications must be careful to conserve memory.
- Mobile applications can be quit and restarted at any time, such as when the device receives a call or text message.

Therefore, building an application for a mobile device is not just a matter of scaling down a desktop application to a different screen size. Flex lets you create separate user interfaces appropriate for each form factor, while sharing underlying model and data access code among mobile, browser, and desktop projects.

Restrictions on using Spark and MX components in a mobile application

Use the Spark component set when creating mobile applications in Flex. The Spark components are defined in the spark.components.* packages. However, for performance reasons or because not all Spark components have skins for the Mobile theme, mobile applications do not support the entire Spark component set.

Except for the MX charting controls and the MX Spacer control, mobile applications do not support the MX component set defined in the mx.* packages.

The following table lists the components that you can use, that you cannot use, or that require care to use in a mobile application:

Component	**Component**	**Use in mobile?**	**Notes**
Spark ActionBar Spark BusyIndicator Spark TabbedViewNavigator Spark TabbedViewNavigatorApplication	Spark View Spark ViewMenu Spark ViewNavigator Spark ViewNavigatorApplication	Yes	These new components support mobile applications.
Spark Button Spark CheckBox Spark DataGroup Spark Group/HGroup/VGroup/TileGroup Spark Image/BitmapImage Spark Label	Spark List Spark RadioButton/RadioButtonGroup Spark SkinnableContainer Spark Scroller Spark TextArea Spark TextInput	Yes	Most of these components have skins for the Mobile theme. Label, Image, and BitmapImage can be used even though they do not have a mobile skin. Some Spark layout containers, such as Group and its subclasses, do not have skins. Therefore, you can use them in a mobile application.
Other Spark skinnable components		Discouraged	Skinnable Spark components other than the ones listed above are discouraged because they do not have a skin for the Mobile theme. If the component does not have a skin for the Mobile theme, you can create one for your application.
Spark DataGrid	Spark RichEditableText Spark RichText	Discouraged	These components are discouraged for performance reasons. While you can use them in a mobile application, doing so can affect performance. For the DataGrid control, performance is based on the amount of data that you render. For the RichEditableText and RichText controls, performance is based on the amount of text, and the number of controls in the application.

Component	Component	Use in mobile?	Notes
MX components other than Spacer and charts		No	Mobile applications do not support MX components, such as the MX Button, CheckBox, List, or DataGrid. These components correspond to the Flex 3 components in the mx.controls.* and mx.containers.* packages.
MX Spacer		Yes	Spacer does not use a skin, so it can be used in a mobile application.
MX chart components		Yes, but with performance implications	You can use the MX chart controls, such as the AreaChart and BarChart, in a mobile application. The MX chart controls are in the mx.charts.* packages. However, performance on a mobile device can be less than optimal depending on the size and type of charting data. By default, Flash Builder does not include the MX components in the library path of mobile projects. To use the MX charting components in an application, add the mx.swc and charts.swc to your library path.

The following Flex features are not supported in mobile applications:

- No support for drag-and-drop operations
- No support for the ToolTip control
- No support for RSLs

Performance considerations with mobile applications

Owing to the performance constraints of mobile devices, some aspects of mobile application development differ from development for browser and desktop applications. Some performance considerations include the following:

- **Write item renderers in ActionScript**

  For mobile applications, you want list scrolling to have the highest performance possible. Write item renderers in ActionScript to achieve the highest performance. While you can write item renderers in MXML, your application performance can suffer.

  Flex provides two item renderers that are optimized for use in a mobile application: spark.components.LabelItemRenderer and spark.components.IconItemRenderer. For more information on these item renderers, see Using a mobile item renderer with a Spark list-based control.

  For more information on creating custom item renderers in ActionScript, see Custom Spark item renderers. For more information on the differences between mobile and desktop item renderers, see Differences between mobile and desktop item renderers.

- **Use ActionScript and compiled FXG graphics or bitmaps to develop custom skins**

The mobile skins shipped with Flex are written in ActionScript with compiled FXG graphics to provide the highest performance. You can write skins in MXML, but your application performance can suffer depending on the number of components that use MXML skins. For the highest performance, write skins in ActionScript and use compiled FXG graphics. For more information, see Spark Skinning and FXG and MXML graphics.

- **Use text components that do not rely on the Text Layout Framework (TLF)**

  Many of the Spark text controls rely on TLF. Using TLF controls in a mobile application can affect performance. For more information on TLF, see About the Spark text controls.

  The Spark Label control does not rely on TLF. The Spark TextInput and TextArea controls have skins for the Mobile theme that do not rely on TLF. For best results, use the Label, TextInput, and TextArea controls in your application except when writing custom item renderers. In custom item renderers, use the StyleableTextField control. For more information, see Custom Spark item renderers.

  The Spark RichText and RichEditableText rely on TLF. You can use these controls to display rich content, but using them can affect performance.

- **Take care when using MX chart components in a mobile application**

  You can use the MX chart controls, such as the AreaChart and BarChart controls, in a mobile application. However, they can affect performance depending on the size and type of charting data.

Blogger Nahuel Foronda created a series of articles on Mobile ItemRenderer in ActionScript.

Blogger Rich Tretola created a cookbook entry on Creating a List with an ItemRenderer for a mobile application.

Chapter 2: Development environment

Create an Android application in Flash Builder

Here is a general workflow for creating a Flex mobile application for the Google Android platform. This workflow assumes that you have already designed your mobile application. See "Design a mobile application" on page 1for more information.

Adobe evangelist Mike Jones shares some lessons he's learned while developing his multi-platform game Mode by offering 10 tips when developing for multiple devices.

AIR requirements

Flex mobile projects and ActionScript mobile projects require AIR 2.6. You can run mobile projects on physical devices that support AIR 2.6.

You can install AIR 2.6 only on supported Android devices that run Android 2.2 or later. For the complete list of supported Android devices, see Certified Devices. Also, review the minimum system requirements to run Adobe AIR on Android devices at Mobile System Requirements.

Note: *If you do not have a device that supports AIR 2.6, you can use Flash Builder to launch and debug mobile applications on the desktop.*

Each version of the Flex SDK includes the required Adobe AIR version. If you have installed mobile applications on a device from an earlier version of the Flex SDK, uninstall AIR from the device. Flash Builder installs the correct version of AIR when you run or debug a mobile application on a device.

Create an application

1 In Flash Builder, select File > New > Flex Mobile Project.

A Flex Mobile Project is a special type of AIR project. Follow the prompts in the new project wizard as you would for any other AIR project in Flash Builder. For more information, see Create Flex mobile projects.

To set Android-specific mobile preferences, see "Set mobile project preferences" on page 13.

When you create a Flex Mobile Project, Flash Builder generates the following files for the project:

- *ProjectName*`.mxml`

  The default application file for the project.

  By default, Flash Builder names this file with the same name as the project. If the project name contains illegal ActionScript characters, Flash Builder names this file Main.mxml. This MXML file contains the base Spark application tag for the project. The base Spark application tag can be ViewNavigatorApplication or TabbedViewNavigatorApplication.

  Typically, you do not add content to the default application file directly, other than ActionBar content that is displayed in all views. To add content to the ActionBar, set the `navigatorContent`, `titleContent`, or `actionContent` properties.

- *ProjectName*`HomeView.mxml`

The file representing the initial view for the project. Flash Builder places the file in a views package. The `firstView` attribute of the ViewNavigatorApplication tag in *`ProjectName`*`.mxml` specifies this file as the default opening view of the application.

For more information on defining views, see "Define views in a mobile application" on page 36.

You can also create an ActionScript-only mobile project. See "Create an ActionScript mobile project" on page 11.

2 (Optional) Add content to the ActionBar of the main application file.

The ActionBar displays content and functionality that apply to the application or to the current view of the application. Here, add content that you want to display in all views of the application. See "Define navigation, title, and action controls in a mobile application" on page 50.

3 Lay out the content of the initial view of your application.

Use Flash Builder in Design mode or Source mode to add components to a view.

Only use components that Flex supports for mobile development. In both Design mode and Source mode, Flash Builder guides you to use supported components. See "User interface and layout" on page 23.

Within the view, add content to the ActionBar that is visible only in that view.

4 (Optional) Add any other views that you want to include in your application.

In the Flash Builder Package Explorer, from the context menu for the views package in your project, select New MXML Component. The New MXML Component wizard guides you as you create the view.

For more information on views, see "Define views in a mobile application" on page 36.

5 (Optional) Add mobile-optimized item renderers for List components.

Adobe provides IconItemRenderer, an ActionScript-based item renderer for use with mobile applications. See Using a mobile item renderer with a Spark list-based control.

6 Configure launch configurations to run and debug the application.

You can run or debug the application on the desktop or on a device.

A launch configuration is required to run or debug an application from Flash Builder. The first time you run or debug a mobile application, Flash Builder prompts you to configure a launch configuration.

When running or debugging a mobile application on a device, Flash Builder installs the application on the device.

See "Run and debug mobile applications" on page 151.

7 Export the application as an installer package.

Use Export Release Build to create packages that can be installed on mobile devices. Flash Builder creates packages for platform you select for export. See "Export Android APK packages for release" on page 157.

Adobe Certified Expert in Flex, Brent Arnold, created the following video tutorials that can help you:

•Create a Flex mobile application with multiple views

- Create a Flex mobile application using a Spark-based List control

Create an iOS application in Flash Builder

Here is a general workflow for creating a mobile application for the Apple iOS platform.

1 Before you begin creating the application, ensure that you follow the steps at "Apple iOS development process using Flash Builder" on page 18.

2 In Flash Builder, select File > New > Flex Mobile Project.

Select the target platform as Apple iOS, and set the mobile project settings.

Follow the prompts in the new-project wizard as you would for any other project-building wizard in Flash Builder. For more information, see "Create an application" on page 8.

You can also create an ActionScript-only mobile project. For more information, see Create ActionScript mobile projects.

3 Configure launch configurations to run and debug the application. You can run or debug the application on the desktop or on a connected device.

For more information, see "Debug an application on an Apple iOS device" on page 155.

4 Export or deploy the application as an iOS package application (IPA).

For more information, see "Export Apple iOS packages for release" on page 158 and "Deploy an application on an Apple iOS device" on page 160.

More Help topics

Beginning a Mobile Application (video)

Create a BlackBerry Tablet OS application in Flash Builder

Flash Builder 4.5.1 includes a plug-in from Research In Motion (RIM) that lets you create and package both Flex and ActionScript applications for the BlackBerry® Tablet OS.

Create an application

Here is a general workflow to create applications for the BlackBerry Tablet OS.

1 Before you begin creating the mobile application, install the BlackBerry Tablet OS SDK for AIR from the BlackBerry Tablet OS Application Development site.

The BlackBerry Tablet OS SDK for AIR provides APIs that let you create AIR-based Flex and ActionScript applications.

For more information on installing the BlackBerry Tablet OS SDK, see the BlackBerry Tablet OS Getting Started Guide.

2 To create a Flex-based AIR application, in Flash Builder, select File > New > Flex Mobile Project.

Follow the prompts in the new project wizard as you would for any other AIR project in Flash Builder. Ensure that you select BlackBerry Tablet OS as the target platform.

For more information, see Create Flex mobile projects.

3 To create an ActionScript-based AIR application, in Flash Builder, select File > New > ActionScript Mobile Project.

Follow the prompts in the new project wizard as you would for any other AIR project in Flash Builder. Ensure that you select BlackBerry Tablet OS as the target platform.

For more information, see Create ActionScript mobile projects.

Sign, package, and deploy an application

For information on signing, packaging, and deploying the application, see the BlackBerry Tablet OS SDK for Adobe AIR Development Guide by RIM.

You can find several additional resources for BlackBerry Tablet OS development from both Adobe and RIM at Adobe Developer Connection.

Create an ActionScript mobile project

Use Flash Builder to create an ActionScript mobile application. The application that you create is based on the Adobe AIR API.

1 Select File > New > ActionScript Mobile Project.

2 Enter a project name and location. The default location is the current workspace.

3 Use the default Flex 4.5 SDK that supports mobile application development.

Click Next.

4 Select the target platforms for your application, and specify mobile project settings for each platform.

For more information on mobile project settings, see "Set mobile project preferences" on page 13.

5 Click Finish, or click Next to specify additional configuration options and build paths.

For more information on the project configuration options and build paths, see Build paths and other project configuration options.

Develop ActionScript extensions

ActionScript extensions let you include native platform capabilities into your mobile application.

About ActionScript extensions

An ActionScript extension contains ActionScript classes and native code. Native code implementation lets you access device-specific features, which cannot be accessed using pure ActionScript classes. For example, accessing the device's vibration functionality.

Native code implementation can be defined as the code that executes outside the AIR runtime. You define platform-specific ActionScript classes and native code implementation in the extension. The ActionScript extension classes access and exchange data with the native code using the ActionScript class ExtensionContext.

Extensions are specific to a device's hardware platform. You can create platform-specific extensions or you can create a single extension that targets multiple platforms. For example, you can create an ActionScript extension that targets both Android and iOS platforms. ActionScript extensions are supported by the following mobile devices:

- Android devices running Android 2.2 or a later version
- iOS devices running iOS 4.0 or a later version

For detailed information on creating cross-platform ActionScript extensions, see *Developing ActionScript Extensions for Adobe AIR*.

Package ActionScript extensions

To provide your ActionScript extension to application developers, you package all the necessary files into an ActionScript Native Extension (ANE) file by following these steps:

1. Build the extension's ActionScript library into a SWC file.
2. Build the extension's native libraries. If the extension has to support multiple platforms, build one library for each target platform.
3. Create a signed certificate for your extension. If the extension is not signed, Flash Builder displays a warning when you add the extension to your project.
4. Create an extension descriptor file.
5. Include any external resources for the extension, such as images.
6. Create the extension package using the Air Developer Tool. For more information, see the AIR documentation.

For detailed information on packaging ActionScript extensions, see *Developing ActionScript Extensions for Adobe AIR*.

Add ActionScript native extensions to a project

You include an ActionScript Native Extension (ANE) file in the project's build path the same way as you would include a SWC file.

1. In Flash Builder, when you create a Flex mobile project, select the Native Extensions tab in the Build Paths settings page.

   You can also add extensions from the Project Properties dialog box by selecting Flex Build Path.
2. Browse to the ANE file or the folder containing the ANE files to add to the project. When you add an ANE file, the extension ID is added to the project's application descriptor file (*project name*-app.xml) by default.

Flash Builder displays an error symbol for the added extension in the following scenarios:

- The AIR runtime version of the extension is later than the application's runtime version.
- The extension does not include all the selected platforms that the application is targeting.

Note: *You can create an ActionScript native extension that targets multiple platforms. To test an application that includes this ANE file on your development computer using the AIR Simulator, ensure that the ANE file supports the computer's platform. For example, to test the application using the AIR Simulator on Windows, ensure that the ANE file supports Windows.*

Include ActionScript native extensions in an application package

When you use the Export Release Build feature to export the mobile application, the extensions used in the project are included within the application package by default.

To change the default selection, follow these steps:

1 In the Export Release Build dialog box, select the Native Extensions tab under Package Settings.

2 The ActionScript native extension files referenced in your project are listed, indicating if the ANE file is used in the project or not.

   If the ANE file is used in the project, it is selected by default in the application package.

   If the ANE file is included in the project but not used, the compiler does not recognize the ANE file. It is then not included in the application package. To include the ANE file in the application package, do the following:

   a In the Project Properties dialog box, select Flex Build Packaging and the required platform.

   b Select the extensions that you want to include in the application package.

Set mobile project preferences

Set device configurations

Flash Builder uses device configurations to display device screen size previews in Design View or to launch applications on the desktop using the AIR Debug Launcher (ADL). See "Manage launch configurations" on page 151.

To set device configurations, open Preferences and select Flash Builder > Device Configurations.

Flash Builder provides several default device configurations. You can add, edit, or remove additional device configurations. You cannot modify the default configurations that Flash Builder provides.

Clicking the Restore Defaults button restores default device configurations but does not remove any configurations that you have added. Also, if you added a device configuration with a name that matches one of the defaults, Flash Builder overrides the added configuration with the default settings.

Device configurations contain the following properties:

Property	Description
Device Name	A unique name for the device.
Platform	Device platform. Select a platform from the list of supported platforms.
Full Screen Size	Width and height of the device's screen.
Usable Screen Size	The standard size of an application on the device. This size is the expected size of an application launched in non-full screen mode, accounting for system chrome, such as the status bar.
Pixels per Inch	Pixels per inch on the device's screen.

Choose target platforms

Flash Builder supports target platforms based on the application type.

To select a platform, open Preferences and select Flash Builder > Target Platforms.

For all third-party plug-ins, see the associated documentation.

Choose an application template

When you create a mobile application, you can select from the following application templates:

Blank Uses the Spark Application tag as the base application element.

Use this option if you want to create a custom application without using the standard view navigation.

View-Based Application Uses the Spark ViewNavigatorApplication tag as the base application element to create an application with a single view.

You can specify the name of the initial view.

Tabbed Application Uses the Spark TabbedViewNavigatorApplication tag as the base application element to create a tab-based application.

To add a tab, enter a name for the tab, and click Add. You can change the order of the tabs by clicking Up and Down. To remove a tab from the application, select a tab and click Remove.

The name of the view is the tab name with "View" appended. For example, if you name a tab as FirstTab, Flash Builder generates a view named FirstTabView.

For each tab that you create, a new MXML file is generated in the "views" package.

Note: *The package name is not configurable through the Flex Mobile Project wizard.*

The MXML files are generated according to the following rules:

- If the tab name is a valid ActionScript class name, Flash Builder generates the MXML file using the tab name with "View" appended.
- If the tab name is not a valid class name, Flash Builder modifies the tab name by removing invalid characters and inserting valid starting characters. If the modified name is unacceptable, Flash Builder changes the MXML filename to "ViewN", where N is the position of the view, starting with N=1.

Adobe Certified Expert in Flex, Brent Arnold, created a video tutorial about using the Tabbed Application template.

Choose mobile application permissions

When you create a mobile application, you can specify or change the default permissions for a target platform. The permissions are specified at the time of compiling, and they cannot be changed at runtime.

First select the target platform, and then set the permissions for each platform, as required. You can edit the permissions later in the application descriptor XML file.

Third-party plug-ins provide additional platform support for both Flex and ActionScript projects. For platform-specific permissions, see the device's associated documentation.

Permissions for the Google Android platform

For the Google Android platform, you can set the following permissions:

INTERNET Allows network requests and remote debugging

The INTERNET permission is selected by default. If you deselect this permission, you cannot debug your application on a device.

WRITE_EXTERNAL_STORAGE Allows writing to an external device

Select this permission to let the application write to an external memory card on the device.

READ_PHONE_STATE Mutes the audio during an incoming call

Select this permission to let the application mute the audio during phone calls. For example, you can select this permission if your application plays audio in the background.

ACCESS_FINE_LOCATION Allows access to a GPS location

Select this permission to let the application access GPS data using the Geolocation class.

DISABLE_KEYGUARD and WAKE_LOCK Disallows sleep mode on the device

Select this permission to prevent the device from going to sleep using the SystemIdleMode class settings.

CAMERA Allows access to a camera

Select this permission to let the application access a camera.

RECORD_AUDIO Allows access to a microphone

Select this permission to let the application access a microphone.

ACCESS_NETWORK_STATE and ACCESS_WIFI_STATE Allows access to information about network interfaces associated with the device

Select this permission to let the application access network information using the NetworkInfo class.

For more information about setting mobile application properties, see the Adobe AIR documentation.

Permissions for the Apple iOS platform

The Apple iOS platform uses runtime validation for permissions instead of predefined permissions. That is, if an application wants to access a specific feature of the Apple iOS platform that requires user permission, a pop-up appears requesting permission.

Choose platform settings

Platform settings let you select a target device family. Depending on the platform that you select, you can select the target device or a target device family. You can select a specific device or all the devices that the platform supports.

Third-party plug-ins provide additional platform support for both Flex and ActionScript projects. For platform-specific settings, see the device's associated documentation.

Platform settings for the Google Android platform

There are no platform-specific settings for the Google Android platform.

Platform settings for the Apple iOS platform

For a Flex mobile project or an ActionScript mobile project, you can specify the following target devices for the Apple iOS platform:

iPhone/iPod Touch Applications using this target family are listed as compatible with only iPhone and iPod Touch devices in the Apple App store.

iPad Applications using this target family are listed as compatible only with iPad devices in the Apple App store.

All Applications using this target family are listed as compatible with both iPhone or iPod Touch, and iPad devices in the Apple App store. This option is the default.

Choose application settings

Automatically Reorient Rotates the application when the user rotates the device. When this setting is not enabled, your application always appears in a fixed orientation.

Full Screen Displays your application in fullscreen mode on the device. When this setting is enabled, the device's status bar does not appear above your application. Your application fills the entire screen.

If you want to target your application across multiple device types with varying screen densities, select Automatically Scale Application For Different Screen Densities. Selecting this option automatically scales the application and handles density changes, as required, for the device. See "Set application scaling" on page 16.

Set application scaling

You use mobile application scaling to build a single mobile application that is compatible with devices with different screen sizes and densities.

Mobile device screens have varying screen densities, or DPI (dots per inch). You can specify the DPI value as 160, 240, or 320, depending on the screen density of the target device. When you enable automatic scaling, Flex optimizes the way it displays the application for the screen density of each device.

For example, suppose that you specify the target DPI value as 160 and enable automatic scaling. When you run the application on a device with a DPI value of 320, Flex automatically scales the application by a factor of 2. That is, Flex magnifies everything by 200%.

To specify the target DPI value, set it as the `applicationDPI` property of the `<s:ViewNavigatorApplication>` tag or `<s:TabbedViewNavigatorApplication>` tag in the main application file:

```
<s:ViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    firstView="views.HomeView"
    applicationDPI="160">
```

If you choose to not auto-scale your application, you must handle the density changes for your layout manually, as required. However, Flex adapts the skins to the density of each device.

For more information about creating density-independent mobile applications, see "Support multiple screen sizes and DPI values in a mobile application" on page 115.

Connect Google Android devices

You can connect a Google Android device to your development computer to preview or debug the application on the Android device.

Supported Android devices

Flex mobile projects and ActionScript mobile projects require AIR 2.6. You can run or debug mobile projects only on physical devices that support AIR 2.6. You can install AIR 2.6 on Android devices running Android 2.2 or later.

Configure Android devices

To run and debug Flex mobile applications from an Android device, enable USB debugging as indicated below:

1 On the device, follow these steps to ensure that USB debugging is enabled:

   a Tap the Home button to display the home screen.

   b Go to Settings, and select Applications > Development.

   c Enable USB debugging.

2 Connect the device to your computer with a USB cable.

3 Pull down the notification area at the top of the screen. You see either USB Connected or USB Connection.

   a Tap USB Connected or USB Connection.

   b If a set of options appears that includes Charge Only mode, select Charge Only and tap OK.

   c If you see a button for turning off mass storage mode, click the button to turn off mass storage.

4 (Windows only) Install the appropriate USB driver for your device. See "Install USB device drivers for Android devices (Windows)" on page 17.

5 Pull down the notification area at the top of the screen.

   If USB Debugging does not appear as an entry, check the USB mode as described in step 3 above. Make sure that the USB mode is not set to PC Mode.

Note: *Additional configuration is needed when debugging. See "Run and debug a mobile application on a device" on page 153.*

Install USB device drivers for Android devices (Windows)

Device drivers and configurations

Windows platforms require installation of a USB driver to connect an Android device to your development computer. Flash Builder provides a device driver and configuration for several Android devices.

These device driver configurations are listed in the `android_winusb.inf`. Windows Device Manager accesses this file when installing the device driver. Flash Builder installs `android_winusb.inf` at the following location:

```
<Adobe Flash Builder 4.5 Home>\utilities\drivers\android\android_winusb.inf
```

For the complete list of supported devices, see Certified devices. For Android devices that are not listed, you can update `android_winusb.inf` with USB drivers. See "Add Android USB device driver configurations" on page 18.

Install USB device driver

1 Connect your Android device to your computer's USB port.

2 Go to the following location:

```
<Flash Builder>/utilities/drivers/android/
```

   Install the USB driver using either the Windows Found New Hardware wizard or the Windows Device Manager.

Important: *If Windows is still unable to recognize your device, you need to install the appropriate USB driver from your device manufacturer. See OEM USB drivers for links to the websites of several device manufacturers from where you can download the appropriate USB driver for your device.*

Add Android USB device driver configurations

If you have a supported Android device not listed in "Install USB device drivers for Android devices (Windows)" on page 17, update the `android_winusb.inf` file to include the device.

1. Plug the device into a USB port of your computer. Windows informs you that it cannot find the driver.
2. Using the Windows Device Manager, open the Details tab of the device properties.
3. Select the Hardware IDs property to view the hardware ID.
4. Open `android_winusb.inf` in a text editor. Find `android_winusb.inf` at the following location:

   ```
   <Adobe Flash Builder 4.5 Home>\utilities\drivers\android\android_winusb.inf
   ```

5. Note the listings in the file that apply to your architecture, either `[Google.NTx86]` or `[Google.NTamd64]`. The listings contain a descriptive comment and one or more lines with the hardware ID, as shown here:

   ```
   . . .
   [Google.NTx86]
   ; HTC Dream
   %CompositeAdbInterface% = USB_Install, USB\VID_0BB4&PID_0C02&MI_01
   . . .
   ```

6. Copy and paste a comment and hardware listing. For the device driver you want to add, edit the listing as follows:

   a. For the comment, specify the name of the device.

   b. Replace the hardware ID with the hardware ID identified in Step 3 above.

   For example:

   ```
   . . .
   [Google.NTx86]
   ; NEW ANDROID DEVICE
   %CompositeAdbInterface%     = USB_Install, NEW HARDWARE ID
   . . .
   ```

7. Use the Windows Device Manager to install the device, as described in "Install USB device drivers for Android devices (Windows)" on page 17 above.

   During the installation, Windows displays a warning that the driver is from an unknown publisher. However, the driver allows Flash Builder to access your device.

Apple iOS development process using Flash Builder

Before developing an iOS application using Flash Builder, it is important to understand the iOS development process and how to obtain the required certificates from Apple.

Overview of the iOS development and deployment process

This table provides a quick list of steps in the iOS development process, how to obtain the required certificates, and prerequisites to each step.

For detailed information on each of these steps, see "Prepare to build, debug, or deploy an iOS application" on page 19.

Step no.	Step	Location	Prerequisites
1.	Join the Apple developer program.	Apple Developer site	None
2.	Register the Unique Device Identifier (UDID) of your iOS device.	iOS Provisioning Portal	Apple developer ID (step 1)
3.	Generate a Certificate Signing Request (CSR) file (*.certSigningRequest).	• On Mac OS, use the Keychain Access program • On Windows, use OpenSSL	None
4.	Generate an iOS developer/distribution certificate (*.cer).	iOS Provisioning Portal	• Apple developer ID (step 1) • CSR file (step 3)
5.	Convert the iOS developer/distribution certificate into P12 format.	• On Mac OS, use the Keychain Access program • On Windows, use OpenSSL	• Apple developer ID (step 1) • iOS developer/distribution certificate (step 4)
6.	Generate the Application ID.	iOS Provisioning Portal	Apple developer ID (step 1)
7.	Generate a provisioning profile (*.mobileprovision)	iOS Provisioning Portal	• Apple developer ID (step 1) • UDID of your iOS device (step 2) • Application ID (step 6)
8.	Build the application.	Flash Builder	• Apple developer ID (step 1) • P12 developer/distribution certificate (step 5) • Application ID (step 6)
9.	Deploy the application.	iTunes	• Provisioning profile (step 7) • Application package (step 8)

Prepare to build, debug, or deploy an iOS application

Before you build an iOS application using Flash Builder and deploy the application on an iOS device or submit to the Apple App store, follow these steps:

1 Join the Apple iOS Developer Program.

You can log in using your existing Apple ID or create an Apple ID. The Apple Developer Registration guides you through the necessary steps.

2 Register the Unique Device Identifier (UDID) of the device.

This step is applicable only if you are deploying your application to an iOS device and not the Apple App Store. If you want to deploy your application on several iOS devices, register the UDID of each device.

Obtain the UDID of your iOS device

a Connect the iOS device to your development computer and launch iTunes. The connected iOS device appears under the Devices section in iTunes.

b Click the device name to display a summary of the iOS device.

c In the Summary tab, click Serial Number to display the 40-character UDID of the iOS device.

You can copy the UDID from iTunes using the keyboard shortcut Ctrl+C (Windows) or Cmd+C (Mac).

Register the UDID of your device

Log in to the iOS Provisioning Portal using your Apple ID and register the device's UDID.

3 Generate a Certificate Signing Request (CSR) file (*.certSigningRequest).

You generate a CSR to obtain a iOS developer/distribution certificate. You can generate a CSR by using Keychain Access on Mac or OpenSSL on Windows. When you generate a CSR you only provide your user name and email address; you don't provide any information about your application or device.

Generating a CSR creates a public key and a private key as well as a *.certSigningRequest file. The public key is included in the CSR, and the private key is used to sign the request.

For more information on generating a CSR, see Generating a certificate signing request.

4 Generate an iOS developer certificate or an iOS distribution certificate (*.cer), as required.

Note: *To deploy an application to a device, you need a developer certificate. To deploy the application to the Apple App Store, you need a distribution certificate.*

Generate an iOS developer certificate

a Log in to the iOS Provisioning Portal using your Apple ID, and select the Development tab.

b Click Request Certificate and browse to the CSR file that you generated and saved on your computer (step 3).

c Select the CSR file and click Submit.

d On the Certificates page, click Download.

e Save the downloaded file (*.developer_identity.cer).

Generate an iOS distribution certificate

f Log in to the iOS Provisioning Portal using your Apple ID, and select the Distribution tab

g Click Request Certificate and browse to the CSR file that you generated and saved on your computer (step 3).

h Select the CSR file and click Submit.

i On the Certificates page, click Download.

j Save the downloaded file (*.distribution_identity.cer).

5 Convert the iOS developer certificate or the iOS distribution certificate to a P12 file format (*.p12).

You convert the iOS developer or iOS distribution certificate to a P12 format so that Flash Builder can digitally sign your iOS application. Converting to a P12 format combines your iOS developer/distribution certificate and the associated private key into a single file.

Note: *If you are testing the application on the desktop using the AIR Debug Launcher (ADL), you don't have to convert the iOS developer/distribution certificate into a P12 format.*

Use Keychain Access on Mac or OpenSSL on Windows to generate a Personal Information Exchange (*.p12) file. For more information, see Convert a developer certificate into a P12 file.

6 Generate the Application ID by following these steps:

a Log in to the iOS Provisioning Portal using your Apple ID.

b Go to the App IDs page, and click New App ID.

c In the Manage tab, enter a description for your application, generate a new Bundle Seed ID, and enter a Bundle Identifier.

Every application has a unique Application ID, which you specify in the application descriptor XML file. An Application ID consists of a ten-character "Bundle Seed ID" that Apple provides and a "Bundle Identifier" suffix that you specify. The Bundle Identifier you specify must match the application ID in the application descriptor file. For example, if your Application ID is com.myDomain.*, the ID in the application descriptor file must start with com.myDomain.

Important: *Wildcard Bundle Identifiers are good for developing and testing iOS applications but can't be used to deploy applications to the Apple App Store.*

7 Generate a Developer Provisioning Profile file or a Distribution Provisioning Profile File (*.mobileprovision).

Note: *To deploy an application to a device, you need a Developer Provisioning Profile. To deploy the application to the Apple App Store, you need a Distribution Provisioning Profile. You use a Distribution Provisioning Profile to sign your application.*

Generate a Developer Provisioning Profile

a Log in to the iOS Provisioning Portal using your Apple ID.

b Go to Certificate > Provisioning, and click New Profile.

c Enter a profile name, select the iOS developer certificate, the App ID, and the UDIDs on which you want to install the application.

d Click Submit.

e Download the generated Developer Provisioning Profile file (*.mobileprovision)and save it on your computer.

Generate a Distribution Provisioning Profile

f Log in to the iOS Provisioning Portal using your Apple ID.

g Go to Certificate > Provisioning, and click New Profile.

h Enter a profile name, select the iOS distribution certificate and the App ID. If you want to test the application before deployment, specify the UDIDs of the devices on which you want to test.

i Click Submit.

j Download the generated Provisioning Profile file (*.mobileprovision)and save it on your computer.

More Help topics

"Create an iOS application in Flash Builder" on page 10

Files to select when you run, debug, or deploy an iOS application

To run, debug, or deploy an application for testing on an iOS device, you select the following files in the Run/Debug Configurations dialog box:

- iOS developer certificate in P12 format (step 5)
- Application descriptor XML file that contains the Application ID (step 6)
- Developer Provisioning Profile (step 7)

For more information, see "Debug an application on an Apple iOS device" on page 155 and "Deploy an application on an Apple iOS device" on page 160.

Files to select when you deploy an application to the Apple App Store

To deploy an application to the Apple App Store, select the Package Type in the Export Release Build dialog box as Final Release Package For Apple App Store, and select the following files:

- iOS distribution certificate in P12 format (step 5)
- Application descriptor XML file that contains the Application ID (step 6).

  Note: *You can't use a wildcard Application ID while submitting an application to the Apple App Store.*

- Distribution Provisioning Profile (step 7)

For more information, see "Export Apple iOS packages for release" on page 158.

Chapter 3: User interface and layout

Lay out a mobile application

Use views and sections to lay out a mobile application

A mobile application is made up of one or more screens, or *views*. For example, mobile application could have three views:

1 A home view that lets you add contact information

2 A contacts view containing a list of existing contacts

3 A search view to search your list of contacts

A simple mobile application

The following image shows the main screen of a simple mobile application built in Flex:

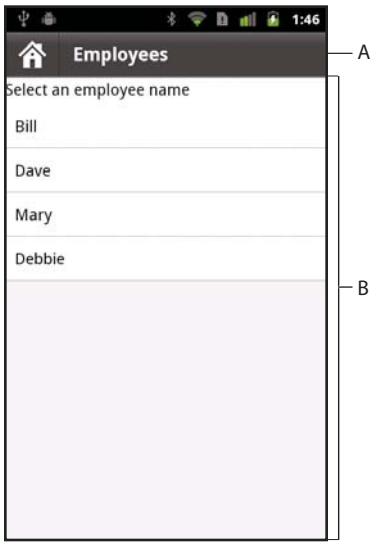

***A.** ActionBar control **B.** Content area*

This figure shows the main areas of a mobile application:

ActionBar control The ActionBar control lets you display contextual information about the current state of the application. This information includes a title area, an area for controls to navigate the application, and an area for controls to perform an action. You can add global content in the ActionBar control that applies to the entire application, and you can add items specific to an individual view.

Content area The content area displays the individual screens, or *views*, that make up the application. Users navigate the views of the application by using the components built in to the application and the input controls of the mobile device.

A mobile application with sections

A more complex application could define several areas, or *sections*, of the application. For example, the application could have a contacts section, an e-mail section, a favorites section, and other sections. Each section of the application contains one or more views. Individual views can be shared across sections so that you do not have to define the same view multiple times.

The following figure shows a mobile application that includes a tab bar at the bottom of the application window:

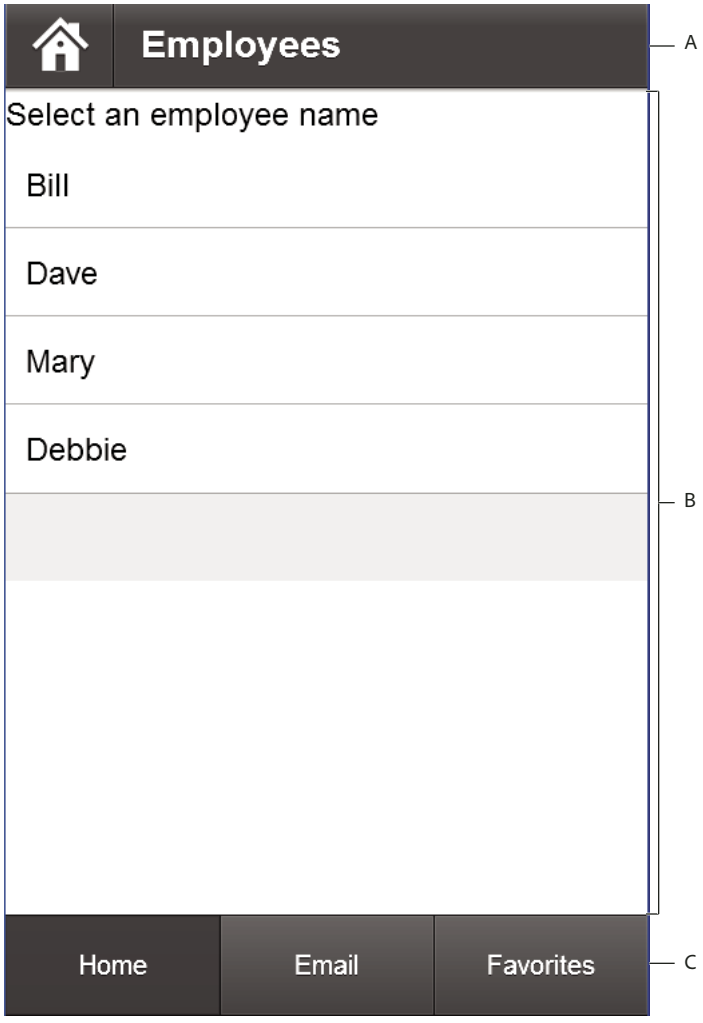

***A.** ActionBar control **B.** Content area **C.** Tab bar*

Flex uses the ButtonBarBase control to implement the tab bar. Each button of the tab bar corresponds to a different section. Select a button in the tab bar to change the current section.

Each section of the application defines its own ActionBar. Therefore, the tab bar is global to the entire application, and the ActionBar is specific to each section.

Lay out a simple mobile application

The following figure shows the architecture of a simple mobile application:

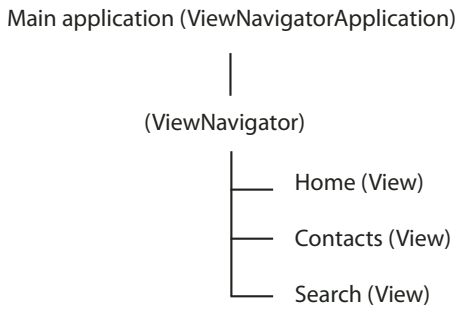

The figure shows an application made up of four files. A mobile application contains a main application file, and one file for each view. There is no separate file for the ViewNavigator; the ViewNavigatorApplication container creates it.

Note: *While this diagram shows the application architecture, it does not represent the application at runtime. At runtime, only one view is active and resident in memory. For more information, see* *"Navigate the views of a mobile application" on page 27.*

Classes used in a mobile application

Use the following classes to define a mobile application:

Class	Description
ViewNavigatorApplication	Defines the main application file. The ViewNavigatorApplication container does not take any children.
ViewNavigator	Controls navigation among the views of an application. The ViewNavigator also creates the ActionBar control. The ViewNavigatorApplication container automatically creates a single ViewNavigator container for the entire application. Use methods of the ViewNavigator container to switch between the different views.
View	Defines the views of the application, where each view is defined in a separate MXML or ActionScript file. An instance of the View container represents each view of the application. Define each view in a separate MXML or ActionScript file.

Use the ViewNavigatorApplication container to define the main application file, as the following example shows:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\SparkSingleSectionSimple.mxml -->
<s:ViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    firstView="views.HomeView">
</s:ViewNavigatorApplication>
```

The ViewNavigatorApplication container automatically creates a single ViewNavigator object that defines the ActionBar. You use the ViewNavigator to navigate the views of the application.

Add a View container to a mobile application

Every mobile application has at least one view. While the main application file creates the ViewNavigator, it does not define any of the views used in the application.

Each view in an application corresponds to a View container defined in an ActionScript or MXML file. Each View contains a `data` property that specifies the data associated with that view. Views can use the `data` property to pass information to each other as the user navigates the application.

Use the `ViewNavigatorApplication.firstView` property to specify the file that defines the first view in the application. In the previous application, the `firstView` property specifies `views.HomeView`. The following example shows the HomeView.mxml file that defines that view:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\views\HomeView.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    title="Home">
    <s:layout>
        <s:VerticalLayout paddingTop="10"/>
    </s:layout>
    <s:Label text="The home screen"/>
</s:View>
```

Blogger David Hassoun blogged about ViewNavigator basics.

Lay out a mobile application with multiple sections

A mobile application can collect related views in different sections of the application. For example, the following figure shows the organization of a mobile application with three sections.

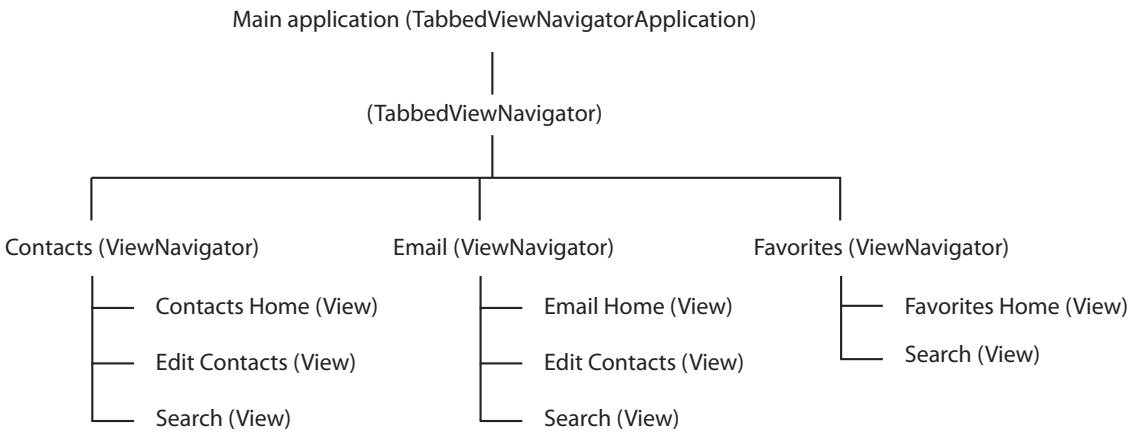

Any section can use any View. That is, a view does not belong to a specific section. The section just defines a way to arrange and navigate a collection of views. In the figure, the Search view is part of every section of the application.

At runtime, only one view is active and resident in memory. For more information, see "Navigate the views of a mobile application" on page 27.

Classes used in a mobile application with multiple sections

The following table lists the classes that you use to create a mobile application with multiple sections:

Class	Description
TabbedViewNavigatorApplication	Defines the main application file. The only allowable child of the TabbedViewNavigatorApplication container is ViewNavigator. Define one ViewNavigator for each section of the application.
TabbedViewNavigator	Controls navigation among the sections that make up the application. The TabbedViewNavigatorApplication container automatically creates a single TabbedViewNavigator container for the entire application. The TabbedViewNavigator container creates the tab bar that you use to navigate among the sections.
ViewNavigator	Define one ViewNavigator container for each section. The ViewNavigator controls navigation among the views that make up the section. It also creates the ActionBar control for the section.
View	Defines the views of the application. An instance of the View container represents each view of the application. Define each view in a separate MXML or ActionScript file.

A sectioned mobile application contains a main application file, and a file that defines each view. Use the TabbedViewNavigatorApplication container to define the main application file, as the following example shows:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\SparkMultipleSectionsSimple.mxml -->
<s:TabbedViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark">
    <s:ViewNavigator label="Contacts" firstView="views.ContactsHome"/>
    <s:ViewNavigator label="Email" firstView="views.EmailHome"/>
    <s:ViewNavigator label="Favorites" firstView="views.FavoritesHome"/>
</s:TabbedViewNavigatorApplication>
```

Use the ViewNavigator in an application with multiple sections

The only allowable child component of the TabbedViewNavigatorApplication container is ViewNavigator. Each section of the application corresponds to a different ViewNavigator container.

Use the ViewNavigator container to navigate the views of each section, and to define the ActionBar control for the section. Use the `ViewNavigator.firstView` property to specify the file that defines the first view in the section.

Use the TabbedViewNavigator in an application with multiple sections

The TabbedViewNavigatorApplication container automatically creates a single container of type TabbedViewNavigator. The TabbedViewNavigator container then creates a tab bar at the bottom of the application. You do not have to add logic to the application to navigate among the sections.

Navigate the views of a mobile application

A stack of View objects controls navigation in a mobile application. The top View object on the stack defines the currently visible view.

The ViewNavigator container maintains the stack. To change views, push a new View object onto the stack, or pop the current View object off the stack. Popping the currently visible View object off the stack destroys the View object and returns the user to the previous view on the stack.

In an application with sections, use the tab bar to navigate the sections. Because a different ViewNavigator defines each section, changing sections corresponds to changing the current ViewNavigator and stack. The View object at the top of the stack of the new ViewNavigator becomes the current view.

To conserve memory, by default the ViewNavigator ensures that only one view is in memory at a time. However, it maintains the data for previous views on the stack. Therefore, when the user navigates back to the previous view, the view can be reinstantiated with the appropriate data.

Note: *The View container defines the* `destructionPolicy` *property. If set to* `auto`*, the default, the ViewNavigator destroys the view when it is not active. If set to* `none`*, the view is cached in memory.*

Blogger Mark Lochrie blogged about Flash Builder 4.5 ViewNavigator.

ViewNavigator navigation methods

Use the following methods of the ViewNavigator class to control navigation:

pushView() Push a View object onto the stack. The View passed as an argument to the `pushView()` method becomes the current view.

popView() Pop the current View object off the navigation stack and destroy the View object. The previous View object on the stack becomes the current view.

popToFirstView() Pop all View objects off the stack and destroy them, except for the first View object on the stack. The first View object on the stack becomes the current view.

popAll() Empty the stack of the ViewNavigator, and destroy all View objects. Your application displays a blank view.

The following figure shows two views. To change the current view, use the `ViewNavigator.pushView()` method to push a View object that represents the new view onto the stack. The `pushView()` method causes the ViewNavigator to switch the display to the new View object.

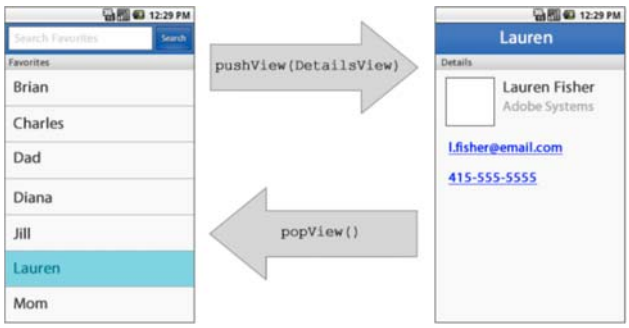

Push and pop View objects to change views.

Use the `ViewNavigator.popView()` method to remove the current View object from the stack. The ViewNavigator returns display to the previous View object on the stack.

Note: *The mobile device itself controls much of the navigation in a mobile application. For example, mobile applications built in Flex automatically handle the back button on mobile devices. Therefore, you do not have to add support for the back button to the application. When the user presses the back button on the mobile device, Flex automatically calls the* `popView()` *method to restore the previous view.*

Blogger David Hassoun blogged about managing data in a view.

Create navigation for an application with multiple sections

In the following figure, the Views are arranged in multiple sections. A different ViewNavigator container defines each section. Within each section are one or more views:

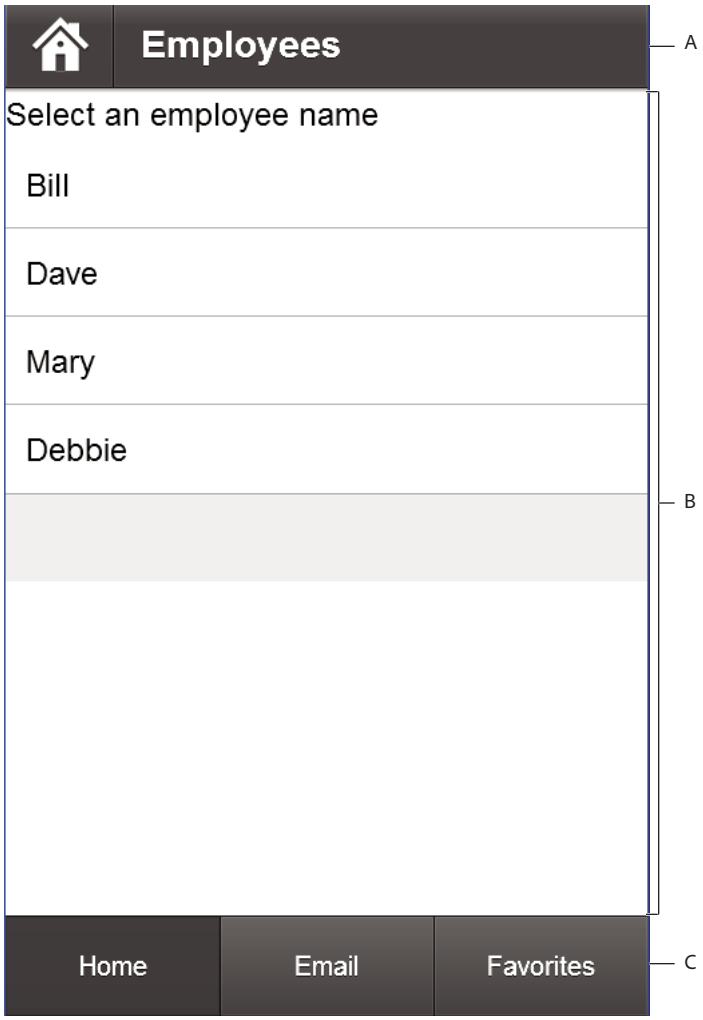

A. *ActionBar* ***B.*** *Content area* ***C.*** *Tab bar*

To change the view in the current section, which corresponds to the current ViewNavigator, use the `pushView()` and `popView()` methods.

To change the current section, use the tab bar. When you switch sections, you switch to the ViewNavigator container of the new section. The display changes to show the View object currently at the top of the stack for the new ViewNavigator.

You can also change sections programmatically by using the `TabbedViewNavigator.selectedIndex` property. This property contains the 0-based index of the selected view navigator.

Handle user input in a mobile application

User input requires different handling in a mobile application compared to a desktop or browser application. In a desktop application built for AIR, or in a browser application built for Flash Player, the primary input devices are a mouse and a keyboard. For mobile devices, the primary input device is a touch screen. A mobile device often has some type of keyboard, and some devices also include a five-way directional input method (left, right, up, down, and select).

The mx.core.UIComponent class defines the `interactionMode` style property that you use to configure components for the type of input used in the application. For the Halo and Spark themes, the default value is `mouse` to indicate that the mouse is the primary input device. For the Mobile theme, the default value is `touch` to indicate that the primary input device is the touch screen.

Hardware key support

Applications defined by the ViewNavigatorApplication or TabbedViewNavigatorApplication containers respond to the back and menu hardware keys of a device. When the user presses the back key, the application navigates to the previous view. If there is no previous view, the application exits and displays the home screen of the device.

When the user presses the back button, the active view of the application receives a `backKeyPressed` event. You can cancel the action of the back key by calling `preventDefault()` in the event handler for the `backKeyPressed` event.

When the user presses the menu button, the current view's ViewMenu container appears, if defined. The ViewMenu container defines a menu located at the bottom of a View container. Each View container defines its own menu specific to that view.

The current View container dispatches a `menuKeyPressed` event when the user presses the menu key. To cancel the action of the menu button, and prevent the ViewMenu from appearing, call the `preventDefault()` method in the event handler for the `menuKeyPressed` event.

For more information, see "Define menus in a mobile application" on page 61.

Handle mouse and touch events in a mobile application

AIR generates different events to indicate different types of inputs. These events include the following:

Mouse events Events generated by user interaction generated by a mouse or touch screen. Mouse events include `mouseOver`, `mouseDown`, and `mouseUp`.

Touch events Events generated on devices that detect user contact with the device, such as a finger on a touch screen. Touch events include `touchTap`, `touchOver`, and `touchMove`. When a user interacts with a device with a touch screen, the user typically touches the screen with a finger or a pointing device.

Gesture events Events generated by multi-touch interactions, such as pressing two fingers on a touch screen at the same time. Gesture events include `gesturePan`, `gestureRotate`, and `gestureZoom`. For example, on some devices you can use a pinch gesture to zoom out from an image.

Built in support for mouse events

The Flex framework and the Flex component set have built-in support for mouse events, but not for touch or gesture events. For example, the user interacts with Flex components in a mobile application by using the touch screen. The components respond to mouse events, such as `mouseDown` and `mouseOver`, but not to touch or gesture events.

For example, the user presses the touch screen to select the Flex Button control. The Button control uses the `mouseUp` and `mouseDown` events to signal that the user has interacted with the control. The Scroller control uses the `mouseMove` and `mouseUp` events to indicate that the user is scrolling the display.

Adobe Developer Evangelist Paul Trani explains handling touch and gesture events in Touch Events and Gesture on Mobile.

Control events generated by AIR

The `flash.ui.Multitouch.inputMode` property controls the events generated by AIR and Flash Player. The `flash.ui.Multitouch.inputMode` property can have one of the following values:

- `MultitouchInputMode.NONE` AIR dispatches mouse events, but not touch or gesture events.
- `MultitouchInputMode.TOUCH_POINT` AIR dispatches mouse and touch events, but not gesture events. In this mode, the Flex framework receives the same mouse events as it does for `MultitouchInputMode.NONE`.
- `MultitouchInputMode.GESTURE` AIR dispatches mouse and gesture events, but not touch events. In this mode, the Flex framework receives the same mouse events as it does for `MultitouchInputMode.NONE`.

As the list shows, regardless of the setting of the `flash.ui.Multitouch.inputMode` property, AIR always dispatches mouse events. Therefore, Flex components can always respond to user interactions made by using a touch screen.

Flex lets you use any value of `flash.ui.Multitouch.inputMode` property in your application. Therefore, while the Flex components do not respond to touch and gesture events, you can add functionality to your application to respond to any event. For example, you can add an event handler to the Button control to handle touch events, such as the `touchTap`, `touchOver`, and `touchMove` events.

The ActionScript 3.0 Developer's Guide provides an overview of handling user input on different devices, and on working with touch, multitouch, and gesture input. For more information, see:

- Basics of user interaction
- Touch, multitouch and gesture input

Define a mobile application and a splash screen

Create a mobile application container

The first tag in a mobile application is typically one of the following:

- The `<s:ViewNavigatorApplication>` tag defines a mobile application with a single section.
- The `<s:TabbedViewNavigatorApplication>` tag defines a mobile application with multiple sections.

When you develop applications for a tablet, screen size limits are not as important as they are with phones. Therefore, for a tablet, you do not have to structure your application around small views. Instead, you can build your application using the standard Spark Application container with the supported mobile components and skins.

Note: *When developing any mobile application, you can use the Spark Application container, even for phones. However, the Spark Application container does not include support for view navigation, data persistence, and the device's back and menu buttons. For more information, see* *"Differences between the mobile application containers and the Spark Application container" on page 32.*

The mobile application containers have the following default characteristics:

Characteristic	Spark ViewNavigatorApplication and TabbedViewNavigatorApplication containers
Default size	100% high and 100% wide to take up all available screen space.

Characteristic	Spark ViewNavigatorApplication and TabbedViewNavigatorApplication containers
Child layout	Defined by the individual View containers that make up the views of the application.
Default padding	0 pixels.
Scroll bars	None. If you add scroll bars to the application container's skin, users can scroll the entire application. That includes the ActionBar and tab bar area of the application. You typically do not want those areas of the view to scroll. Therefore, add scroll bars to the individual View containers of the application, rather than to the application container's skin.

Differences between the mobile application containers and the Spark Application container

The Spark mobile application containers have much of the same functionality as the Spark Application container. For example, you apply styles to the mobile application containers in the same way that you apply them to the Spark Application container.

The Spark mobile application containers have several characteristics that differ from the Spark Application container:

- **Support for persistence**

  Supports data storage to and loading from a disk. Persistence lets users interrupt a mobile application, for example to answer a phone call, and then restore the state of the application when the call ends.

- **Support for view navigation**

  The ViewNavigatorApplication container automatically creates a single ViewNavigator container to control navigation among views.

  The TabbedViewNavigatorApplication container automatically creates a single TabbedViewNavigator container to control navigation among sections.

- **Support for the device's back and menu buttons**

  When the user presses the back button, the application navigates back to the previous view on the stack. When the user presses the menu button, the current view's ViewMenu container appears, if defined.

For more information on the Spark application container, see About the Application container.

Handle application-level events

The NativeApplication class represents an AIR application. It provides application information and application-wide functions, and it dispatches application-level events. You can access the instance of the NativeApplication class that corresponds to your mobile application by using the static property `NativeApplication.nativeApplication`.

For example, the NativeApplication class defines the `invoke` and `exiting` events that you can handle in your mobile application. The following example references the NativeApplication class to define an event handler for the `exiting` event:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\SparkNativeApplicationEvent.mxml -->
<s:ViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    firstView="views.EmployeeMainView"
    creationComplete="creationCompleteHandler(event);">

    <fx:Script>
        <![CDATA[
            import mx.events.FlexEvent;
            protected function creationCompleteHandler(event:FlexEvent):void {
                // Reference NativeApplication to assign the event handler.
              NativeApplication.nativeApplication.addEventListener(Event.EXITING, myExiting);
            }

            protected function myExiting(event:Event):void {
                // Handle exiting event.
            }
        ]]>
    </fx:Script>

</s:ViewNavigatorApplication>
```

Notice that you access the ViewNavigator by using the `ViewNavigatorApplication.navigator` property.

Add a splash screen to an application

The Spark Application container is a base class for the ViewNavigatorApplication and TabbedViewNavigatorApplication containers. When used with the Spark theme, the Spark Application container supports an application preloader to show the download and initialization progress of an application SWF file.

When used with the Mobile theme, you can display a splash screen instead. The splash screen appears during application startup.

Note: *To use the splash screen in a desktop application, set the* `Application.preloader` *property to spark.preloaders.SplashScreen. Also add the frameworks\libs\mobile\mobilecomponents.swc to the library path of the application.*

Blogger Joseph Labrecque blogged about AIR for Android Splash Screen with Flex 4.5.

Blogger Brent Arnold created a video about adding a splash screen to an Android application.

Adding a splash screen from an image file

You can load a splash screen directly from an image file. To configure the splash screen, you use the `splashScreenImage`, `splashScreenScaleMode`, and `splashScreenMinimumDisplayTime` properties of the application class.

For example, the following example loads a splash screen from a JPG file using the letterbox format:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\SparkMobileSplashScreen.mxml -->
<s:ViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    firstView="views.EmployeeMainView"
    splashScreenImage="@Embed('assets/logo.jpg')"
    splashScreenScaleMode="letterbox">

</s:ViewNavigatorApplication>
```

Adding a splash screen from a custom component

The example in the previous section used a JPG file to define the splash screen. The disadvantage of that mechanism is that the application uses the same image regardless of the capabilities of the mobile device on which the application runs.

Mobile devices have different screen resolutions and sizes. Rather than using a single image as the splash screen, you can instead define a custom component. The component determines the capabilities of the mobile device and uses the appropriate image for the splash screen.

Use the SplashScreenImage class to define the custom component, as the following example shows:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\myComponents\MySplashScreen.mxml -->
<s:SplashScreenImage xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark">

    <!-- Default splashscreen image. -->
    <s:SplashScreenImageSource
        source="@Embed('assets/logoDefault.jpg')"/>

    <s:SplashScreenImageSource
        source="@Embed('assets/logo240Portrait.jpg')"
        dpi="240"
        aspectRatio="portrait"/>

    <s:SplashScreenImageSource
        source="@Embed('assets/logo240Landscape.jpg')"
        dpi="240"
        aspectRatio="landscape"/>

    <s:SplashScreenImageSource
        source="@Embed('assets/logo160.jpg')"
        dpi="160"
        aspectRatio="portrait"
        minResolution="960"/>
</s:SplashScreenImage>
```

Within the definition of the component, use the SplashScreenImageSource class to define each of the splash screen images. The `SplashScreenImageSource.source` property specifies the image file. The SplashScreenImageSource `dpi`, `aspectRatio`, and `minResolution` properties define the capabilities of a mobile device that are required to display the image.

For example, the first SplashScreenImageSource definition specifies only the `source` property for the image. Because there are no settings for the `dpi`, `aspectRatio`, and `minResolution` properties, this image can be used on any device. Therefore, it defines the default image displayed when no other image matches the capabilities of the device.

The second and third SplashScreenImageSource definitions specify an image for a 240 DPI device in either portrait or landscape modes.

The final SplashScreenImageSource definition specifies an image for a 160 DPI device in portrait mode with a minimum resolution of 960 pixels. The value of the `minResolution` property is compared against the larger of the values of the `Stage.stageWidth` and `Stage.stageHeight` properties. The larger of the two values must be equal to or greater than the `minResolution` property.

The following mobile application uses this component:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\SparkMobileSplashComp.mxml -->
<s:ViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    firstView="views.EmployeeMainView"
    splashScreenImage="myComponents.MySplashScreen">
</s:ViewNavigatorApplication>
```

The SplashScreenImage class automatically determines the image that best matches the capabilities of the device. This matching is based on the `dpi`, `aspectRatio` and `minResolution` properties of each SplashScreenImageSource definition.

The procedure for determining the best match is as follows:

1. Determine all of the SplashScreenImageSource definitions that match the settings of the mobile device. A match occurs when:
   a. The SplashScreenImageSource definition does not have that setting explicitly defined. For example, no setting for the `dpi` property matches any device's DPI.
   b. For the `dpi` or `aspectRatio` property, the property must exactly match the corresponding setting of the mobile device.
   c. For the `minResolution` property, the property matches a setting on the device when the larger of the `Stage.stageWidth` and `Stage.stageHeight` properties is equal to or greater than `minResolution`.
2. If there's more than one SplashScreenImageSource definition that matches the device then:
   a. Choose the one with largest number of explicit settings. For example, a SplashScreenImageSource definition that specifies both the `dpi` and `aspectRatio` properties is a better match than one that only species the `dpi` property.
   b. If there is still more than one match, choose the one with highest `minResolution` value.
   c. If there is still more than one match, choose the first one defined in the component.

Explicitly selecting the splash screen image

The `SplashScreenImage.getImageClass()` method determines the SplashScreenImageSource definition that best matches the capabilities of a mobile device. You can override this method to add your own custom logic, as the following example shows.

In this example, you add a SplashScreenImageSource definition for an iOS splash screen. In the body of the override of the `getImageClass()` method, you first determine of the application is running on iOS. If so, you display the image specific for iOS.

If the application is not running on iOS, then call the `super.getImageClass()` method. This method uses the default implementation to determine the SplashScreenImageSource instance to display:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\myComponents\MyIOSSplashScreen.mxml -->
<s:SplashScreenImage xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark">
    <fx:Script>
        <![CDATA[
            // Override getImageClass() to return an image for iOS.
            override public function getImageClass(aspectRatio:String, dpi:Number,
resolution:Number):Class {
                // Is the application running on iOS?
                if (Capabilities.version.indexOf("IOS") == 0)
                    return iosImage.source;

                return super.getImageClass(aspectRatio, dpi, resolution);
            }
        ]]>
    </fx:Script>
    <!-- Default splashscreen image. -->
    <s:SplashScreenImageSource
        source="@Embed('assets/logoDefault.jpg')"/>

    <s:SplashScreenImageSource
        source="@Embed('assets/logo240Portrait.jpg')"
        dpi="240"
        aspectRatio="portrait"/>

    <s:SplashScreenImageSource
        source="@Embed('assets/logo240Landscape.jpg')"
        dpi="240"
        aspectRatio="landscape"/>

    <s:SplashScreenImageSource
        source="@Embed('assets/logo160.jpg')"
        dpi="160"
        aspectRatio="portrait"
        minResolution="960"/>
    <!-- iOS splashscreen image. -->
    <s:SplashScreenImageSource id="iosImage"
        source="@Embed('assets/logoIOS.jpg')"/>
</s:SplashScreenImage>
```

Define views in a mobile application

A mobile application typically defines multiple screens, or views. As users navigate through the application, they switch to and from different views.

Make navigation intuitive to the user of your application. That is, when the user moves from one view to another, they expect to be able to navigate back to the previous view. The application can define a Home button, or other top-level navigation aids that let the user move to locations in the application from any other location.

To define the views of a mobile application, use the View container. To control the navigation among the views of a mobile application, use the ViewNavigator container.

Use pushView() to change views

Use the `ViewNavigator.pushView()` method to push a new view onto the stack. Access the ViewNavigator by using the `ViewNavigatorApplication.navigator` property. Pushing a view changes the display of the application to the new view.

The `pushView()` method has the following syntax:

```
pushView(viewClass:Class,
    data:Object = null,
    context:Object = null,
    transition:spark.transitions:ViewTransitionBase = null):void
```

where:

- `viewClass` specifies the class name of the view. This class typically corresponds to the MXML file that defines the view.
- `data` specifies any data passed to the view. This object is written to the `View.data` property of the new view.
- `context` specifies an arbitrary object written to the `ViewNavigator.context` property. When the new view is created, it can reference this property and perform an action based on this value. For example, the view could display data in different ways based on the value of `context`.
- `transition` specifies the transition to play when the view changes to the new view. For information on view transitions, see "Define transitions in a mobile application" on page 83.

Use the data argument to pass a single Object

Use the `data` argument to pass a single Object containing any data required by the new view. The view can then access the object by using the `View.data` property, as the following example shows:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\views\EmployeeView.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    title="Employee View">
    <s:layout>
        <s:VerticalLayout paddingTop="10"/>
    </s:layout>

    <s:VGroup>
        <s:Label text="{data.firstName}"/>
        <s:Label text="{data.lastName}"/>
        <s:Label text="{data.companyID}"/>
    </s:VGroup>
</s:View>
```

In this example, the EmployeeView is defined in the EmployeeView.mxml file. This view uses the `data` property to access the first and last names of an employee, and to access the employee's ID from the Object that is passed to it.

The `View.data` property is guaranteed to be valid at the time of the `add` event for the View object. For more information on the life cycle of a View container, see "The life cycle of the Spark ViewNavigator and View containers" on page 46.

Pass data to the first view in an application

The `ViewNavigatorApplication.firstView` property and the `ViewNavigator.firstView` property define the first view in an application. To pass data to the first view, use the `ViewNavigatorApplication.firstViewData` property, or the `ViewNavigator.firstViewData` property.

Pass data to a view

In the following example, you define a mobile application by using the ViewNavigatorApplication container. The ViewNavigatorApplication container automatically creates a single instance of the ViewNavigator class that you use to navigate the Views defined by the application.

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\SparkSingleSection.mxml -->
<s:ViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
        firstView="views.EmployeeMainView">

    <fx:Script>
        <![CDATA[
            protected function button1_clickHandler(event:MouseEvent):void {
                // Switch to the first view in the section.
                navigator.popToFirstView();
            }
        ]]>
    </fx:Script>

    <s:navigationContent>
        <s:Button icon="@Embed(source='assets/Home.png')"
            click="button1_clickHandler(event)"/>
    </s:navigationContent>
</s:ViewNavigatorApplication>
```

This example defines a Home button in the navigation area of the ActionBar control. Selecting the Home button pops all views off the stack back to the first view. The following figure shows this application:

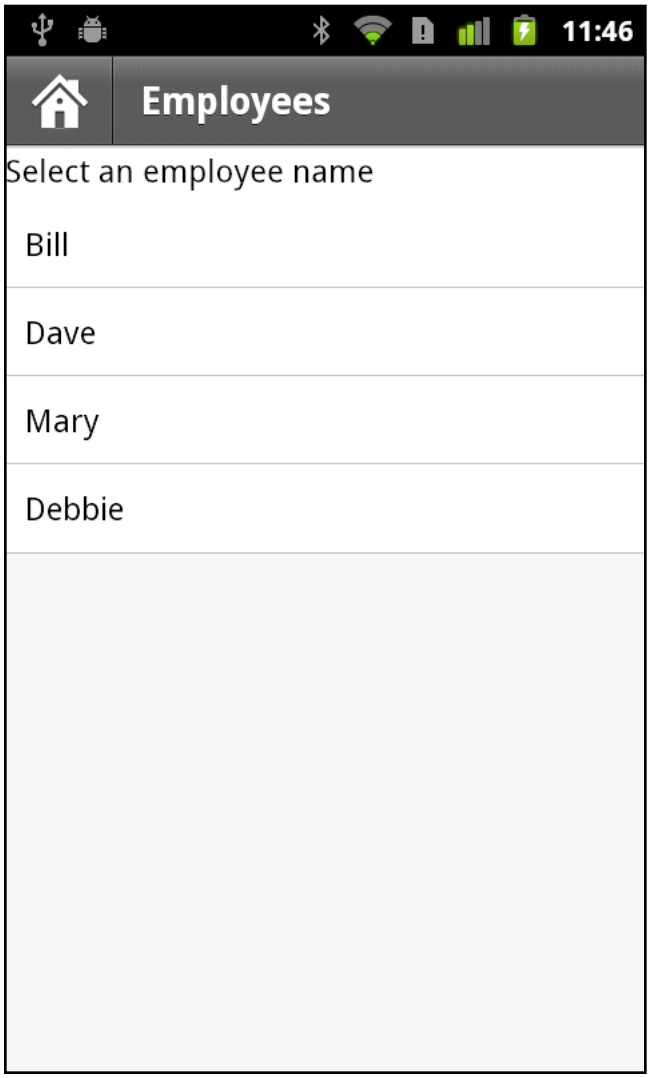

The EmployeeMainView.mxml file defines the first view of the application, as shown in the following example:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\views\EmployeeMainView.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    title="Employees">
    <s:layout>
        <s:VerticalLayout paddingTop="10"/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import spark.events.IndexChangeEvent;
            protected function myList_changeHandler(event:IndexChangeEvent):void {
                navigator.pushView(views.EmployeeView,myList.selectedItem);
            }
        ]]>
    </fx:Script>

    <s:Label text="Select an employee name"/>
    <s:List id="myList"
        width="100%" height="100%"
        labelField="firstName"
        change="myList_changeHandler(event)">
        <s:ArrayCollection>
            <fx:Object firstName="Bill" lastName="Smith" companyID="11233"/>
            <fx:Object firstName="Dave" lastName="Jones" companyID="13455"/>
            <fx:Object firstName="Mary" lastName="Davis" companyID="11543"/>
            <fx:Object firstName="Debbie" lastName="Cooper" companyID="14266"/>
        </s:ArrayCollection>
    </s:List>
</s:View>
```

This view defines a List control that lets the user select an employee name. Selecting a name causes the event handler for the `change` event to push an instance of a different view onto the stack, named EmployeeView. Pushing an instance of EmployeeView causes the application to change to the EmployeeView view.

The `pushView()` method in this example takes two arguments: the new view and an Object that defines the data to pass to the new view. In this example, you pass the data object corresponding to the currently selected item in the List control.

The following example shows the definition of EmployeeView:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\views\EmployeeView.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    title="Employee View">
    <s:layout>
        <s:VerticalLayout paddingTop="10"/>
    </s:layout>

    <s:VGroup>
        <s:Label text="{data.firstName}"/>
        <s:Label text="{data.lastName}"/>
        <s:Label text="{data.companyID}"/>
    </s:VGroup>
</s:View>
```

The EmployeeView displays the three fields from the data provider of the List control. EmployeeView accesses the data passed to it by using the `View.data` property.

Blogger Steve Mathews created a cookbook entry on Passing data between Views.

Return data from a view

The `ViewNavigator.popView()` method returns control from the current view back to the previous view on the stack. When the `popView()` method executes, the current view is destroyed and the previous View on the stack is restored. Restoring the previous View includes resetting its `data` property from the stack,

For a complete description of the life cycle of a view, including events dispatched during creation, see "The life cycle of the Spark ViewNavigator and View containers" on page 46.

The new view is restored with the original `data` object at the time it was deactivated. Therefore, you do not typically use the original `data` object to pass data back from the old view to the new view. Instead, you override the `createReturnObject()` method of the old view. The `createReturnObject()` method returns a single Object.

Return object type

The Object returned by the `createReturnObject()` method is written to the `ViewNavigator.poppedViewReturnedObject` property. The data type of the `poppedViewReturnedObject` property is ViewReturnObject.

ViewReturnObject defines two properties, `context` and `object`. The `object` property contains the Object returned by the `createReturnObject()` method. The `context` property contains the value of the `context` argument that was passed to the view when the view was pushed onto the navigation stack using `pushView()`.

The `poppedViewReturnedObject` property is guaranteed to be set in the new view before the view receives the `add` event. If the `poppedViewReturnedObject.object` property is null, no data was returned.

Example: Passing data to a view

The following example, SelectFont.mxml, shows a view that lets you set a font size. The override of the `createReturnObject()` method returns the value as a Number. The `fontSize` field of the `data` property passed in from the previous view sets the initial value of the TextInput control:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\views\SelectFont.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    title="Select Font Size"
    add="addHandler(event);">
    <s:layout>
        <s:VerticalLayout paddingTop="10"
            paddingLeft="10" paddingRight="10"/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import mx.events.FlexEvent;
            // Define return Number object.
            protected var fontSize:Number;

            // Initialize the return object with the passed in font size.
            // If you do not set a value,
            // return this value for the font size.
            protected function addHandler(event:FlexEvent):void {
```

```
                fontSize = data.fontSize;
            }

            // Save the value of the specified font.
            protected function changeHandler(event:Event):void {
                fontSize=Number(ns.text);
                navigator.popView();
            }

            // Override createReturnObject() to return the new font size.
            override public function createReturnObject():Object {
                return fontSize;
            }
        ]]>
    </fx:Script>

    <s:Label text="Select Font Size"/>
    <!-- Set the initlial value of the TextInput to the passed fontSize -->
    <s:TextInput id="ns"
        text="{data.fontSize}"/>
    <s:Button label="Save" click="changeHandler(event);"/>
</s:View>
```

The following figure shows the view defined by SelectFont.mxml:

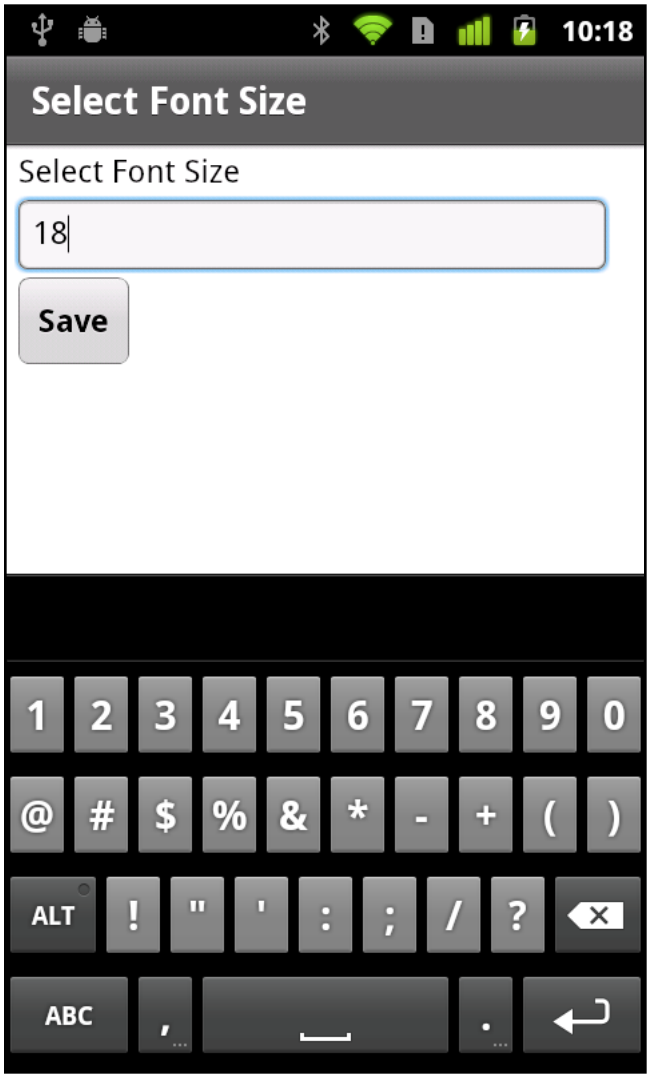

The view in the following example, MainFontView.mxml, uses the view defined in SetFont.mxml. The MainFontView.mxml view defines the following:

- A Button control in the ActionBar to change to the view defined by SetFont.mxml.
- An event handler for the `add` event that first determines if the `View.data` property is null. If null, the event handler adds the `data.fontSize` field to the `View.data` property.

  If the `data` property is not null, the event handler sets the font size to the value in the `data.fontSize` field.

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\views\MainFontView.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    title="Font Size"
    add="addHandler(event);">
    <s:layout>
        <s:VerticalLayout paddingTop="10"/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import mx.events.FlexEvent;

            // Change to the SelectFont view, and pass the current data property.
            // The data property contains the fontSize field with the current font size.
            protected function clickHandler(event:MouseEvent):void {
                navigator.pushView(views.SelectFont, data);
            }
            // Set the font size in the event handler for the add event.
            protected function addHandler(event:FlexEvent):void {
                // If the data property is null,
                // initialize it and create the data.fontSize field.
                if (data == null) {
                   data = new Object();
                   data.fontSize = getStyle('fontSize');
                   return;
                }

                // Otherwise, set data.fontSize to the retured value,
                // and set the font size.
                data.fontSize = navigator.poppedViewReturnedObject.object;
                setStyle('fontSize', data.fontSize);
            }
        ]]>
    </fx:Script>

    <s:actionContent>
        <s:Button label="Set Font&gt;"
            click="clickHandler(event);"/>
    </s:actionContent>

    <s:Label text="Text to size."/>
</s:View>
```

Configure an application for portrait and landscape orientation

A mobile device sets the orientation of an application automatically when the device orientation changes. To configure your application for different orientations, Flex defines two view states that correspond to the portrait and landscape orientations: `portrait` and `landscape`. Use these view states to set characteristics of your application based on the orientation.

The following example uses view state to control the `layout` property of a Group container based on the current orientation:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\views\SearchViewStates.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    title="Search">
    <s:layout>
        <s:VerticalLayout paddingTop="10"/>
    </s:layout>

    <s:states>
        <s:State name="portrait"/>
        <s:State name="landscape"/>
    </s:states>

    <s:Group>
        <s:layout>
            <s:VerticalLayout/>
        </s:layout>
        <s:layout.landscape>
            <s:HorizontalLayout/>
        </s:layout.landscape>
        <s:TextInput text="Enter search text" textAlpha="0.5"/>
        <s:Button label="Search"/>
    </s:Group>
    <s:TextArea text="search results" textAlpha="0.5"/>
</s:View>
```

This example defines a search view. The Group container controls the layout of the input search text and search button. In portrait mode, the Group container uses vertical layout. Changing the layout to landscape mode causes the Group container to use horizontal layout.

Define a custom skin to support layout modes

You can define a custom skin class for a mobile application. If the skin supports portrait and landscape layout, your skin must handle the `portrait` and `landscape` view states.

You can configure an application so that it does not change the layout orientation as the user rotates the device. To do so, edit the application's XML file, the one ending in -app.xml, to set the following properties:

- To disable the application from changing the layout orientation, set the `<autoOrients>` property to `false`.
- To set the orientation, set the `<aspectRatio>` property to `portrait` or `landscape`.

Set the overlay mode of a Spark ViewNavigator container

By default, the tab bar and ActionBar control of a mobile application define an area that cannot be used by the views of the application. That means your content cannot use the full screen size of the mobile device.

However, you can use the `ViewNavigator.overlayControls` property to change the default layout of these components. When you set the `overlayControls` property to `true`, the content area of the application spans the entire width and height of the screen. The ActionBar control and the tab bar hover over the content area with an alpha value that makes them appear partly transparent.

The skin class for the ViewNavigator container, spark.skins.mobile.ViewNavigatorSkin, defines view states to handle the different values of the `overlayControls` property. When the `overlayControls` property is `true`, "AndOverlay" is appended to the current state's name. For example, ViewNavigator's skin is in the "portrait" state by default. When the `overlayControls` property is `true`, the navigator's skin's state is changed to "portraitAndOverlay".

The life cycle of the Spark ViewNavigator and View containers

Flex performs a series of operations when you switch from one view to another view in a mobile application. At various points during the process of switching views, Flex dispatches events. You can monitor these events to perform actions during the process. For example, you can use the `removing` event to cancel the switch from one view to another view.

The following chart describes the process of switching from the current view, View A, to another view, View B:

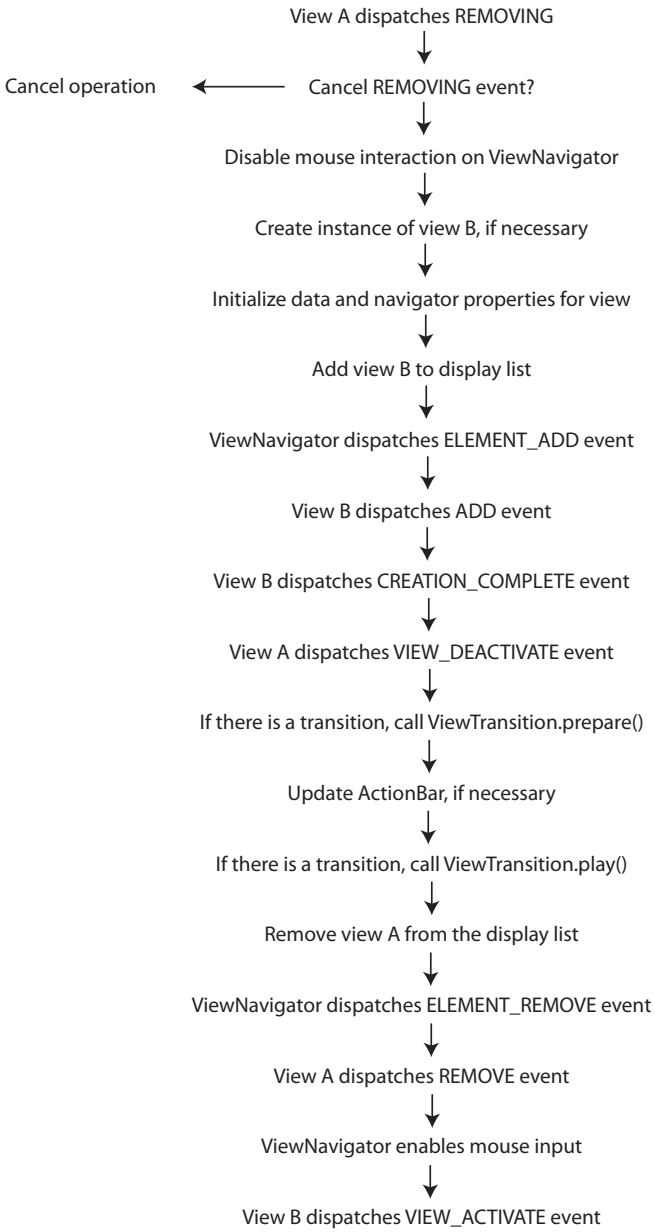
View A dispatches REMOVING
Cancel operation
Cancel REMOVING event?
Disable mouse interaction on ViewNavigator
Create instance of view B, if necessary
Initialize data and navigator properties for view
Add view B to display list
ViewNavigator dispatches ELEMENT_ADD event
View B dispatches ADD event
View B dispatches CREATION_COMPLETE event
View A dispatches VIEW_DEACTIVATE event
If there is a transition, call ViewTransition.prepare()
Update ActionBar, if necessary
If there is a transition, call ViewTransition.play()
Remove view A from the display list
ViewNavigator dispatches ELEMENT_REMOVE event
View A dispatches REMOVE event
ViewNavigator enables mouse input
View B dispatches VIEW_ACTIVATE event

Define tabs in a mobile application

Define the sections of an application

Use the TabbedViewNavigatorApplication container to define a mobile application with multiple sections. The TabbedViewNavigatorApplication container automatically creates a TabbedViewNavigator container. The TabbedViewNavigator container creates a tab bar to support navigation among the sections of the application.

Each ViewNavigator container defines a different section of the application. Use the `navigators` property of the TabbedViewNavigatorApplication container to specify ViewNavigator containers.

In the following example, you define three sections corresponding to the three ViewNavigator tags. Each ViewNavigator defines the first view that appears when you switch to the section:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\SparkMultipleSections.mxml -->
<s:TabbedViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark">

    <s:navigators>
        <s:ViewNavigator label="Employees" firstView="views.EmployeeMainView"/>
        <s:ViewNavigator label="Contacts" firstView="views.ContactsMainView"/>
        <s:ViewNavigator label="Search" firstView="views.SearchView"/>
    </s:navigators>

</s:TabbedViewNavigatorApplication>
```

Note: *You do not have to specify the `navigators` child tag in MXML because it is the default property of TabbedViewNavigator.*

Each ViewNavigator maintains a separate navigation stack. Therefore, the ViewNavigator methods, such as `pushView()` and `popView()`, are relative to the currently active section. The back button on the mobile device returns control to the previous view on the stack of the current ViewNavigator. The change of view does not alter the current section.

You do not have to add any specific logic to the application for section navigation. The TabbedViewNavigator container automatically creates a tab bar at the bottom of the application to control the navigation of the sections.

While it is not required, you can add programmatic control of the current section. To change sections programmatically, set the `TabbedViewNavigator.selectedIndex` property to the index of the desired section. Section indexes are 0-based: the first section in the application is at index 0, the second is at index 1, and so on.

Adobe Certified Expert in Flex, Brent Arnold, created a video about using the ViewNavigator navigation stack.

Adobe Evangelist Holly Schinsky describes ways to pass data between tabs in a mobile application in Flex Mobile Development - Passing Data Between Tabs.

See a video about the TabbedViewNavigator container from video2brain at Creating a Tabbed View Navigator Application.

Handle section change events

When the section changes, the TabbedViewNavigator container dispatches the following events:

- The `changing` event is dispatched just before the section changes. To prevent the section change, call the `preventDefault()` method in the event handler for the `changing` event.

- The `change` event is dispatched just after the section changes.

Configure the ActionBar with multiple sections

An ActionBar control is associated with a ViewNavigator. Therefore, you can configure the ActionBar for each section when you define the section's ViewNavigator. In the following example, you configure the ActionBar separately for each ViewNavigator container that defines the three different sections of the application:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\SparkMultipleSectionsAB.mxml -->
<s:TabbedViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark">

    <fx:Script>
        <![CDATA[
            protected function button1_clickHandler(event:MouseEvent):void {
                // Switch to the first section in the application.
                tabbedNavigator.selectedIndex = 0;
                // Switch to the first view in the section.
                ViewNavigator(tabbedNavigator.selectedNavigator).popToFirstView();
            }
        ]]>
    </fx:Script>

    <s:navigators>
        <s:ViewNavigator label="Employees" firstView="views.EmployeeMainView">
            <s:navigationContent>
                <s:Button icon="@Embed(source='assets/Home.png')"
                    click="button1_clickHandler(event)"/>
            </s:navigationContent>
        </s:ViewNavigator>
        <s:ViewNavigator label="Contacts" firstView="views.ContactsMainView">
            <s:navigationContent>
                <s:Button icon="@Embed(source='assets/Home.png')"
                    click="button1_clickHandler(event)"/>
            </s:navigationContent>
        </s:ViewNavigator>
        <s:ViewNavigator label="Search" firstView="views.SearchView">
            <s:navigationContent>
                <s:Button icon="@Embed(source='assets/Home.png')"
                    click="button1_clickHandler(event)"/>
            </s:navigationContent>
        </s:ViewNavigator>
    </s:navigators>

</s:TabbedViewNavigatorApplication>
```

The following figure shows this application with the Contacts tab selected in the tab bar:

Alternatively, you can define the ActionBar in each view of the application. In that way, each view uses the same ActionBar content no matter where you use it in the application.

Control the tab bar

Hide the tab bar control in a view

Any view can hide the tab bar by setting the `View.tabBarVisible` property to `false`. By default, the `tabBarVisible` property is `true` to show the tab bar.

You can also use the `TabbedViewNavigator.hideTabBar()` and `TabbedViewNavigator.showTabBar()` methods to control the visibility.

Adobe Certified Expert in Flex, Brent Arnold, created a video about hiding the tab bar.

Apply an effect to the tab bar of the TabbedViewNavigator container

By default, the tab bar uses a slide effect for its show and hide effects. The tab bar does not use any effect when you change the currently selected tab.

You can change the default effect of the tab bar for a show or a hide effect by overriding the `TabbedViewNavigator.createTabBarHideEffect()` and `TabbedViewNavigator.createTabBarShowEffect()` methods. After you hide the tab bar, remember to set the `visible` and `includeInLayout` properties of the tab bar to `false`.

Define navigation, title, and action controls in a mobile application

Configure the ActionBar control

The ViewNavigator container defines the ActionBar control. The ActionBar control provides a standard area for a title, and for navigation and action controls. It lets you define global controls that users can access from anywhere in the application, or in a specific view. For example, you can use the ActionBar control to add a home button, a search button, or other options.

For a mobile application with a single section, meaning a single ViewNavigator container, all views share the same action bar. For a mobile application with multiple sections, meaning one with multiple ViewNavigator containers, each section defines its own action bar.

Use the ActionBar control to define the action bar area. The ActionBar control defines three distinct areas, as the following figure shows:



***A**. Navigation area **B**. Title area **C**. Action area*

Areas of the ActionBar

- **Navigation area**

  Contains components that let the user navigate the section. For example, you can define a home button in the navigation area.

  Use the `navigationContent` property to define the components that appear in the navigation area. Use the `navigationLayout` property to define the layout of the navigation area.

- **Title area**

  Contains either a String containing title text, or components. If you specify components, you cannot specify a title String.

  Use the `title` property to specify the String to appear in the title area. Use the `titleContent` property to define the components that appear in the title area. Use the `titleLayout` property to define the layout of the title area. If you specify a value for the `titleContent` property, the ActionBar skin ignores the `title` property.

- **Action area**

  Contains components that define actions the user can take in a view. For example, you can define a search or refresh button as part of the action area.

Use the `actionContent` property to define the components that appear in the action area. Use the `actionLayout` property to define the layout of the action area.

While Adobe recommends that you use the navigation, title, and action areas as described, there are no restrictions on the components you place in these areas.

Set ActionBar properties in the ViewNavigatorApplication, ViewNavigator, or View container

You can set the properties that define the contents of the ActionBar control in the ViewNavigatorApplication container, in the ViewNavigator container, or in individual View containers. The View container has the highest priority, followed by the ViewNavigator, then the ViewNavigatorApplication container. Therefore, the properties that you set in the ViewNavigatorApplication container apply to the entire application, but you can override them in the ViewNavigator or View container.

Note: *An ActionBar control is associated with a ViewNavigator, so it is specific to a single section of a mobile application. Therefore, you cannot configure an ActionBar from the TabbedViewNavigatorApplication and TabbedViewNavigator containers.*

Example: Customize a Spark ActionBar control at the application level

The following example shows main application file of a mobile application:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\SparkActionBarSimple.mxml -->
<s:ViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    firstView="views.MobileViewHome">

    <fx:Script>
        <![CDATA[
            protected function button1_clickHandler(event:MouseEvent):void {
                // Perform a refresh
            }
        ]]>
    </fx:Script>

    <s:navigationContent>
        <s:Button label="Home" click="navigator.popToFirstView();"/>
    </s:navigationContent>

    <s:actionContent>
        <s:Button label="Refresh" click="button1_clickHandler(event);"/>
    </s:actionContent>
</s:ViewNavigatorApplication>
```

This example defines a Home button in the navigation content area of the ActionBar control, and a Refresh button in the action content area.

The following example defines the MobileViewHome View container that defines the first view of the application. The View container defines a title string, “Home View”, but does not override either the navigation content or action content areas of the ActionBar control:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\views\MobileViewHome.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    title="Home View">
    <s:layout>
        <s:VerticalLayout paddingTop="10"/>
    </s:layout>

    <s:Label text="Home View"/>
    <s:Button label="Submit"/>
</s:View>
```

Example: Customize an ActionBar control in a View container

This example uses a main application file with a single section that defines a Home button in the navigation area of the ViewNavigatorApplication container. It also defines a Search button in the action area:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\SparkActionBarOverride.mxml -->
<s:ViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    firstView="views.MobileViewHomeOverride">

    <fx:Script>
        <![CDATA[
            protected function button1_clickHandler(event:MouseEvent):void {
                navigator.popToFirstView();
            }
            protected function button2_clickHandler(event:MouseEvent):void {
                // Handle search
            }
        ]]>
    </fx:Script>

    <s:navigationContent>
        <s:Button icon="@Embed(source='assets/Home.png')"
            click="button1_clickHandler(event);"/>
    </s:navigationContent>

    <s:actionContent>
        <s:Button icon="@Embed(source='assets/Search.png')"
            click="button2_clickHandler(event);"/>
    </s:actionContent>
</s:ViewNavigatorApplication>
```

The first view of this application is the MobileViewHomeOverride view. The MobileViewHomeOverride view defines a Button control to navigate to a second View container that defines a Search page:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\views\MobileViewHomeOverride.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    title="Home View">
    <s:layout>
        <s:VerticalLayout paddingTop="10"/>
    </s:layout>

    <fx:Script>
        <![CDATA[

            // Navigate to the Search view.
            protected function button1_clickHandler(event:MouseEvent):void {
                navigator.pushView(SearchViewOverride);
            }
        ]]>
    </fx:Script>

    <s:Label text="Home View"/>
    <s:Button label="Search" click="button1_clickHandler(event)"/>
</s:View>
```

The View container that defines the Search page overrides the title area and action area of the ActionBar control, as shown below:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\views\SearchViewOverride.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark">
    <s:layout>
        <s:VerticalLayout paddingTop="10"
            paddingLeft="10" paddingRight="10"/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            protected function button1_clickHandler(event:MouseEvent):void {
                // Perform a search.
            }
        ]]>
    </fx:Script>

    <!-- Override the title to insert a TextInput control. -->
    <s:titleContent>
        <s:TextInput text="Enter search text ..." textAlpha="0.5"
            width="250"/>
    </s:titleContent>

    <!-- Override the action area to insert a Search button. -->
    <s:actionContent>
        <s:Button label="Search" click="button1_clickHandler(event);"/>
    </s:actionContent>

    <s:Label text="Search View"/>
    <s:TextArea text="Search results appear here ..."
        height="75%"/>
</s:View>
```

The following figure shows the ActionBar control for this view:

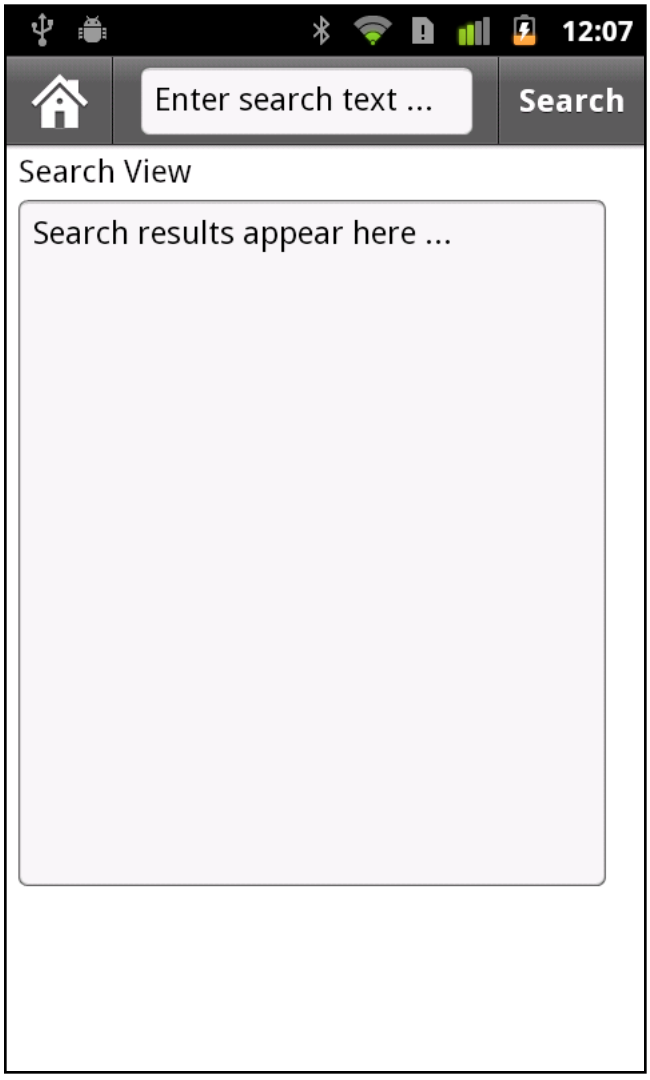

Because the Search view does not override the navigation area of the ActionBar control, the navigation area still displays the Home button.

Hide the ActionBar control

You can hide the ActionBar control in any view by setting the `View.actionBarVisible` property to `false`. By default, the `actionBarVisible` property is `true` to show the ActionBar control.

Use the `ViewNavigator.hideActionBar()` method to hide the ActionBar control for all views controlled by the ViewNavigator, as the following example shows:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\SparkSingleSectionNoAB.mxml -->
<s:ViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    firstView="views.HomeView"
    creationComplete="creationCompleteHandler(event);">

    <fx:Script>
        <![CDATA[
            import mx.events.FlexEvent;
            protected function creationCompleteHandler(event:FlexEvent):void {
            // Access the ViewNavigator using the ViewNavigatorApplication.navigator property.
                navigator.hideActionBar();
            }
        ]]>
    </fx:Script>

</s:ViewNavigatorApplication>
```

You can define a custom effect for the ActionBar when the ActionBar is hidden, or when it is made visible. By default, the ActionBar uses the Animate effect on a show or hide. Change the default effect by overriding the `ViewNavigator.createActionBarHideEffect()` and `ViewNavigator.createActionBarShowEffect()` methods. After playing an effect that hides the ActionBar, set its `visible` and `includeInLayout` properties to `false` so that it is no longer included in the layout of the view.

Use scroll bars in a mobile application

Considerations when using scroll bars in a mobile application

Typically, if content takes up more than the visible area of the screen, the application displays scroll bars. Use the Scroller control to add scroll bars to your application. Some component, such as the Spark List control, support scrolling without the need of using the Scroller component. For more information, see Scrolling Spark containers.

The hit area of a scroll bar is the area of the screen in which you position the mouse to perform a scroll. In a desktop or browser-based application, the hit area is the visible area of the scroll bar. In a mobile application, scroll bars are hidden even when the content is larger than the visible area of the screen. Hiding the scroll bars enables the application to use the full width and height of the screen.

A mobile application must differentiate between when the user interacts with a control, such as by selecting a Button control, from when the user wants to scroll. One consideration with scroll bars in a mobile application is that Flex components often change their appearance in response to a user interaction.

For example, when the user presses a Button control, the button changes its appearance to indicate that it is selected. When the user releases the button, the button changes its appearance back to the deselected state. However, when scrolling, if the user touches the screen over the Button, you do not want the button to change its appearance.

Adobe engineer Steven Shongrunden shows an example of working with scroll bars in Saving scroll position between views in a mobile Flex Application.

Scrolling terms

The following terms are used to describe scrolling in a mobile application:

Content For a scrollable component, such as a Group container or List control, the entire area of the component. Depending on the screen size and application layout, only a subset of the content might be visible.

Viewport The subset of the content area of a component that is currently visible.

Drag A touch gesture that occurs when the user touches a scrollable area and then moves their finger so that the content moves along with the gesture.

Velocity The rate and direction of movement of a drag gesture. Measured in pixels-per-millisecond along the X and Y axis.

Throw A drag gesture where the user lifts their finger once the drag gesture has reached a certain velocity, and the scrollable content continues to move.

Bounce A drag or throw gesture can move the viewport of a scrollable component outside the component's content. The viewport then displays an empty area. When you release your finger, or the velocity of a throw reaches zero, the viewport bounces back to its resting point with the viewport filled with content. The movement slows as the viewport reaches the resting point so that it comes to a smooth stop.

Scrolling modes in a mobile application

Scrollable components, such as List and Scroller, support different types of scrolling based on the setting of the `pageScrollingEnabled` and `scrollSnappingMode` properties of the component. These properties are only valid when the `interactionMode` style is set to `touch`.

The following table describes the scrolling modes:

pageScrollingEnabled	scrollSnappingMode	Mode
false (default)	none (default)	By default, scrolling is pixel-based. The final scroll position is any pixel location based on the drag or throw gesture. For example, you scroll a List control. Scrolling ends when you lift your finger even if a partial List item is visible.
false	leadingEdge, center, trailingEdge	Scrolling is pixel-based, but the content snaps to a final position based on the value of `scrollSnappingMode`. For example, you scroll a List vertically with `scrollSnappingMode` set to a value of `leadingEdge`. The List control snaps to a final scroll position where the top list element is aligned to the top of the list.
true	none	Scrolling is page-based. The size of the viewport of the scrollable component determines the size of the page. You can only scroll a single page at a time, regardless of the gesture. Scroll at least 50% of the visible area of the component to cause the page to scroll to the next page. If you scroll less than 50%, the component remains on the current page. Alternatively, if the velocity of the scroll is high enough, the next page display. If the velocity is not high enough, the component remains on the current page. When content size is not an exact multiple of the viewport size, additional padding is added to the last page to make it fit completely in the viewport.
true	leadingEdge, center, trailingEdge	Scrolling is page-based, but the component snaps to a final position based on the value of `scrollSnappingMode`. To guarantee that the snapping mode is respected, the scrolling distance is not always exactly equal to the size of the page.

Scrolling examples in a mobile application

In the following example, you use a Scroller component to wrap a Group container in a mobile application. The Group container has as its child an Image control containing a large image. By wrapping the Group container in the Scroller, you can scroll the image:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\views\SparkMobilePixelScrollerHomeView.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark" title="HomeView">
    <s:Scroller width="200" height="200">
        <s:Group>
            <s:Image width="300" height="400"
                source="@Embed(source='../assets/logo.jpg')"/>
        </s:Group>
    </s:Scroller>
</s:View>
```

Notice that in this example, you omit any settings for of the `pageScrollingEnabled` and `scrollSnappingMode` properties. Therefore, this example uses the default pixel scrolling mode, and you can scroll to any pixel location in the image.

The next example shows a List control that sets the `pageScrollingEnabled` and `scrollSnappingMode` properties:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\views\SparkMobilePageScrollHomeView.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    title="Adobe Product List">
    <s:layout>
        <s:VerticalLayout paddingTop="10" paddingLeft="10" paddingRight="10"/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import spark.events.IndexChangeEvent;

            protected function myList_changeHandler(event:IndexChangeEvent):void {
                navigator.pushView(views.ProductPricelView,myList.selectedItem);
            }

        ]]>
    </fx:Script>

    <s:List id="myList" labelField="Product"
        height="200" width="100%"
        borderVisible="true"
        scrollSnappingMode="leadingEdge"
        pageScrollingEnabled="true"
        change="myList_changeHandler(event);">
        <s:dataProvider>
            <s:ArrayCollection>
```

```
                <fx:Object Product="Adobe AIR" Price="11.99"/>
                <fx:Object Product="Adobe BlazeDS" Price="11.99"/>
                <fx:Object Product="Adobe ColdFusion" Price="11.99"/>
                <fx:Object Product="Adobe Flash Player" Price="11.99"/>
                <fx:Object Product="Adobe Flex" Price="Free"/>
                <fx:Object Product="Adobe LiveCycleDS" Price="11.99"/>
                <fx:Object Product="Adobe LiveCycle ES2" Price="11.99"/>
                <fx:Object Product="Open Source Media Framework"/>
                <fx:Object Product="Adobe Photoshop" Price="11.99"/>
                <fx:Object Product="Adobe Illustrator" Price="11.99"/>
                <fx:Object Product="Adobe Reader" Price="11.99"/>
                <fx:Object Product="Adobe Acrobat" Price="11.99"/>
                <fx:Object Product="Adobe InDesign" Price="Free"/>
                <fx:Object Product="Adobe Connect" Price="11.99"/>
                <fx:Object Product="Adobe Dreamweaver" Price="11.99"/>
                <fx:Object Product="Open Framemaker"/>
            </s:ArrayCollection>
        </s:dataProvider>
    </s:List>
</s:View>
```

This example uses page scrolling with a snap setting of `leadingEdge`. Therefore, as you scroll the List, the List can scroll a single page at a time. On a change of page, the control snaps to a final scroll position where the top list element is aligned to the top of the list.

Events and scroll bars

Flex components rely on events to indicate that a user interaction has occurred. In response to the user interaction, the component can then change its appearance, or perform some other action.

Application developers rely on events to handle user interaction. For example, you typically use the Button control's `click` event to run an event handler in response to the user selecting the button. Use the List control's `change` event to run an event handler when the user selects an item in the List.

The Flex scrolling mechanism relies on the `mouseDown` event. That means the scrolling mechanism listens for `mouseDown` events to determine if a scroll operation is to be initiated.

Interpret a user gesture as a scroll operation

For example, an application consists of multiple Button controls in a scrollable container:

1. Use your finger to press a Button control. The button dispatches a `mouseDown` event.
2. Flex delays responding to the user interaction for a predefined time period. The delay period ensures that the user is selecting the button and not attempting to scroll the screen.

   If, during the delay period, you move your finger more than a predefined amount, Flex interprets that gesture as a scroll action. The distance that you have to move your finger for the gesture to be interpreted as a scroll is approximately 0.08 inches. This distance corresponds to about 20 pixels on a 252 DPI device.

   Because you moved your finger before the delay period expires, the Button control never recognizes the interaction. The button never dispatches an event or changes its appearance.
3. After the delay period expires, the Button control recognizes the user interaction. The button changes its appearance to indicate that it has been selected.

   Use the `touchDelay` property of the control to configure the duration of the delay. The default value is 100 ms. If you set the `touchDelay` property to 0, there is no delay and scrolling is initiated immediately.

4 After the delay period expires and Flex has dispatched the mouse events, you then move your finger more than 20 pixels. The Button control returns to the normal state, and the scroll action is initiated.

   In this case, the button changed its appearance because the delay period expired. However, once you move your finger more than 20 pixels, even after the delay period expires, Flex interprets the gesture as a scroll action.

Note: *Flex components support many different types of events besides mouse events. When working with components, you decide how your application reacts to these events. At the time of the* `mouseDown` *event, the intended behavior of the user is ambiguous. The user could intend to interact with the component or they could scroll. Because of this ambiguity, Adobe recommends listening for* `click` *or* `mouseUp` *events instead of the* `mouseDown` *event.*

Handle scroll events

To signal the beginning of a scroll operation, the component that dispatches the `mouseDown` event dispatches a bubbling `touchInteractionStarting` event. If that event is not canceled, the component dispatches a bubbling `touchInteractionStart` event.

When a component detects a `touchInteractionStart` event, it must not attempt to respond to the user gesture. For example, when a Button control detects a `touchInteractionStart` event, it turns off any visual indicators that it set based on the initial `mouseDown` event.

If a component does not want to allow the scroll to start, the component can call the `preventDefault()` method in the event handler for the `touchInteractionStarting` event.

When the scroll operation completes, the component that dispatches the `mouseDown` event dispatches a bubbling `touchInteractionEnd` event.

Scroll behavior based on the initial touch point

The following table describes the way scrolling is handled based on the location of the initial touch point:

Selected item	Behavior
Empty space, noneditable text, unselectable text	No component recognizes the gesture. The Scroller waits for the user to move the touch point more than 20 pixels before initiating scrolling.
Item in a List control	After the delay period, the item renderer for the selected item changes the display to the selected state. However, if at any time the user moves more than 20 pixels, then the item changes its appearance to the normal state and scrolling is initiated.
Button, CheckBox, RadioButton, DropDownList	After the delay period expires, show its `mouseDown` state. However, if the user moves the touch point more than 20 pixels, then the control changes its appearance to the normal state and initiates scrolling.
Button component inside a List item renderer	The item renderer never highlights. The Button or the Scroller handles the gesture, the same as the normal Button case.

Define menus in a mobile application

The ViewMenu container defines a menu at the bottom of a View container in a mobile application. Each View container defines its own menu specific to that view.

The following figure shows the ViewMenu container in an application:

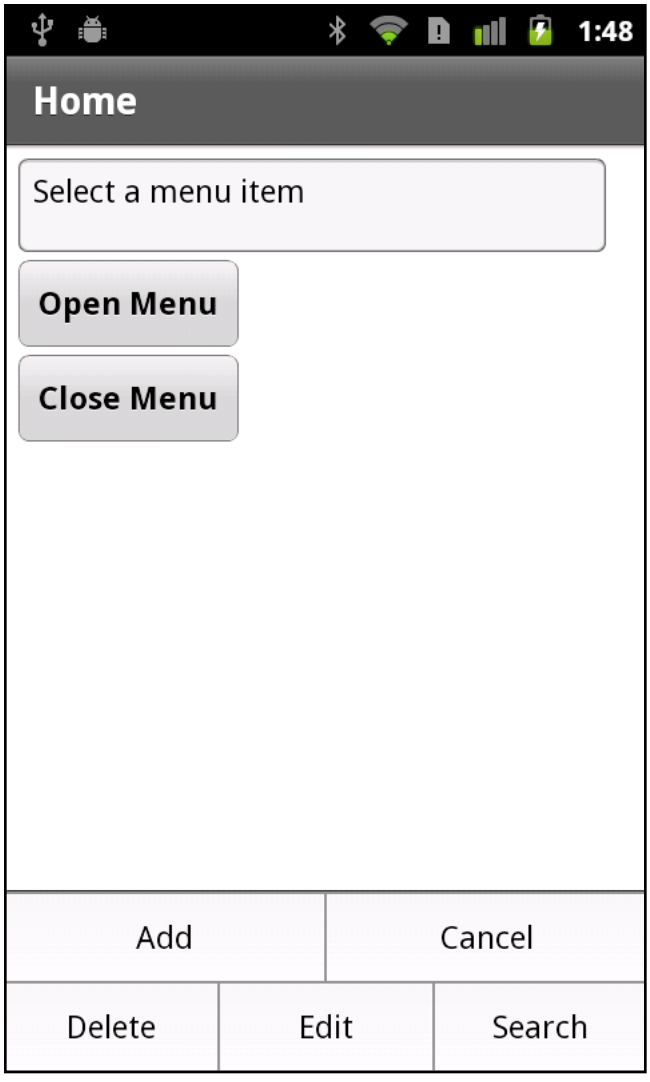

The ViewMenu container defines a menu with a single hierarchy of menu buttons. That is, you cannot create menus with submenus.

The children of the ViewMenu container are defined as ViewMenuItem controls. Each ViewMenuItem control represents a single button in the menu.

User interaction with the ViewMenu container

Open the menu by using the hardware menu key on the mobile device. You can also open it programmatically.

Selecting a menu button closes the entire menu. The ViewMenuItem control dispatches a `click` event when the user selects a menu button.

While the menu is open, press the device's back or menu button to close the menu. The menu also closes if you press the screen anywhere outside the menu.

The caret is the menu button that currently has focus. Use the device's five-way control or arrow keys to change the caret. Press the device's Enter key or the five-way control to select the caret item and close the menu.

Create a menu in a mobile application

Use the `View.viewMenuItems` property to define the menu for a view. The `View.viewMenuItems` property takes a Vector of ViewMenuItem controls, as the following example shows:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- components\mobile\views\ViewMenuHome.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    title="Home">

    <fx:Script>
        <![CDATA[
            // The event listener for the click event.
            private function itemClickInfo(event:MouseEvent):void {
                switch (event.currentTarget.label) {
                    case "Add" :
                        myTA.text = "Add selected";
                        break;
                    case "Cancel" :
                        myTA.text = "Cancel selected";
                        break;
                    case "Delete" :
                        myTA.text = "Delete selected";
                        break;
                    case "Edit" :
                        myTA.text = "Edit selected";
                        break;
                    case "Search" :
                        myTA.text = "Search selected";
                        break;
                    default :
                        myTA.text = "Error";
                }
```

```
            }
        ]]>
    </fx:Script>

    <s:viewMenuItems>
        <s:ViewMenuItem label="Add" click="itemClickInfo(event);"/>
        <s:ViewMenuItem label="Cancel" click="itemClickInfo(event);"/>
        <s:ViewMenuItem label="Delete" click="itemClickInfo(event);"/>
        <s:ViewMenuItem label="Edit" click="itemClickInfo(event);"/>
        <s:ViewMenuItem label="Search" click="itemClickInfo(event);"/>
    </s:viewMenuItems>

    <s:VGroup paddingTop="10" paddingLeft="10">
        <s:TextArea id="myTA" text="Select a menu item"/>
        <s:Button label="Open Menu"
            click="mx.core.FlexGlobals.topLevelApplication.viewMenuOpen=true;"/>
        <s:Button label="Close Menu"
            click="mx.core.FlexGlobals.topLevelApplication.viewMenuOpen=false;"/>
    </s:VGroup>
</s:View>
```

In this example, you use the `View.viewMenuItems` property to add five menu items, where each menu items represented by a ViewMenuItem control. Each ViewMenuItem control uses the `label` property to specify the text that appears in the menu for that item.

Notice that you do not explicitly define the ViewMenu container. The View container automatically creates an instance of the ViewMenu container to hold the ViewMenuItem controls.

Use the ViewMenuItem control's `icon` style

The ViewMenuItem control defines the `icon` style property that you can use to include an image. You can use the `icon` style with or without the `label` property.

Handle the ViewMenuItem control's `click` event

Each ViewMenuItem control also defines an event handler for the `click` event. The ViewMenuItem control dispatches the `click` event when the user selects the item. In this example, all menu items use the same event handler. However, you can choose to define a separate event handler for each `click` event.

Open the ViewMenuItem control programmatically

You open the menu by using the hardware menu key on your device. This application also defines two Button controls to open and close the menu programmatically.

To open the menu programmatically, set the `viewMenuOpen` property of the application container to `true`. To close the menu, set the property to `false`. The `viewMenuOpen` property is defined in the ViewNavigatorApplicationBase class, the base class of the ViewNavigatorApplication and TabbedViewNavigatorApplication containers.

Apply a skin to the ViewMenu and ViewMenuItem components

Use skins to control the appearance of the ViewMenu and ViewMenuItem components. The default ViewMenu skin class is spark.skins.mobile.ViewMenuSkin. The default ViewMenuItem skin class is spark.skins.mobile.ViewMenuItemSkin.

Blogger Daniel Demmel shows how to skin the ViewMenu control to look like Gingerbread black.

The skin classes use skin states, such as normal, closed, and disabled, to control the appearance of the skin. The skins also define transitions to control the appearance of the menu as it changes view state.

For more information, see "Basics of mobile skinning" on page 137.

Set the layout of a ViewMenu container

The ViewMenuLayout class defines the layout of the view menu. The menu can have multiple rows depending on the number of menu items.

ViewMenuItem layout rules

The `requestedMaxColumnCount` property of the ViewMenuLayout class defines the maximum number of menu items in a row. By default, the `requestedMaxColumnCount` property is set to three.

The following rules define how the ViewMenuLayout class performs the layout:

- If you define three or fewer menu items, where the `requestedMaxColumnCount` property contains the default value of three, the menu items are displayed in a single row. Each menu item has the same size.

  If you define four or more menu items, meaning more menu items than specified by the `requestedMaxColumnCount` property, the ViewMenu container creates multiple rows.

- If the number of menu items is evenly divisible by the `requestedMaxColumnCount` property, each row contains the same number of menu items. Each menu item is the same size.

  For example, the `requestedMaxColumnCount` property is set to the default value of three, and you define six menu items. The menu displays two rows, each containing three menu items.

- If the number of menu items is not evenly divisible by the `requestedMaxColumnCount` property, rows can contain a different number of menu items. The size of the menu items depends on the number of menu items in the row.

  For example, the `requestedMaxColumnCount` property is set to the default value of three, and you define eight menu items. The menu displays three rows. The first row contains two menu items. The second and third rows each contain three items.

Create a custom ViewMenuItem layout

The ViewMenuLayout class contains properties to let you modify the gaps between menu items and the default number of menu items in each row. You can also create your own custom layout for the menu by creating your own layout class.

By default, the spark.skins.mobile.ViewMenuSkin class defines the skin for the ViewMenu container. To apply a customized ViewMenuLayout class to the ViewMenu container, define a new skin class for the ViewMenu container.

The default ViewMenuSkin class includes a definition for a Group container named `contentGroup`, as the following example shows:

```
...
    <s:Group id="contentGroup" left="0" right="0" top="3" bottom="2"
        minWidth="0" minHeight="0">
        <s:layout>
            <s:ViewMenuLayout horizontalGap="2" verticalGap="2" id="contentGroupLayout"
                requestedMaxColumnCount="3"
                requestedMaxColumnCount.landscapeGroup="6"/>
        </s:layout>
    </s:Group>
...
```

Your skin class must also define a container named `contentGroup`. That container uses the `layout` property to specify your customized layout class.

You can then apply your custom skin class in the application, as the following example shows:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- components\mobile\ViewMenuSkin.mxml -->
<s:ViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    firstView="views.ViewMenuHome">
    <fx:Style>
        @namespace s "library://ns.adobe.com/flex/spark";
        s|ViewMenu {
            skinClass: ClassReference("skins.MyVMSkin");
        }
    </fx:Style>
</s:ViewNavigatorApplication>
```

Display the busy indicator for long-running activity in a mobile application

The Spark BusyIndicator control displays a rotating spinner with 12 spokes. You use the BusyIndicator control to provide a visual indication that a long-running operation is in progress.

The following figure shows the BusyIndicator control in the control bar area of a Spark Panel container, next to the Submit button:

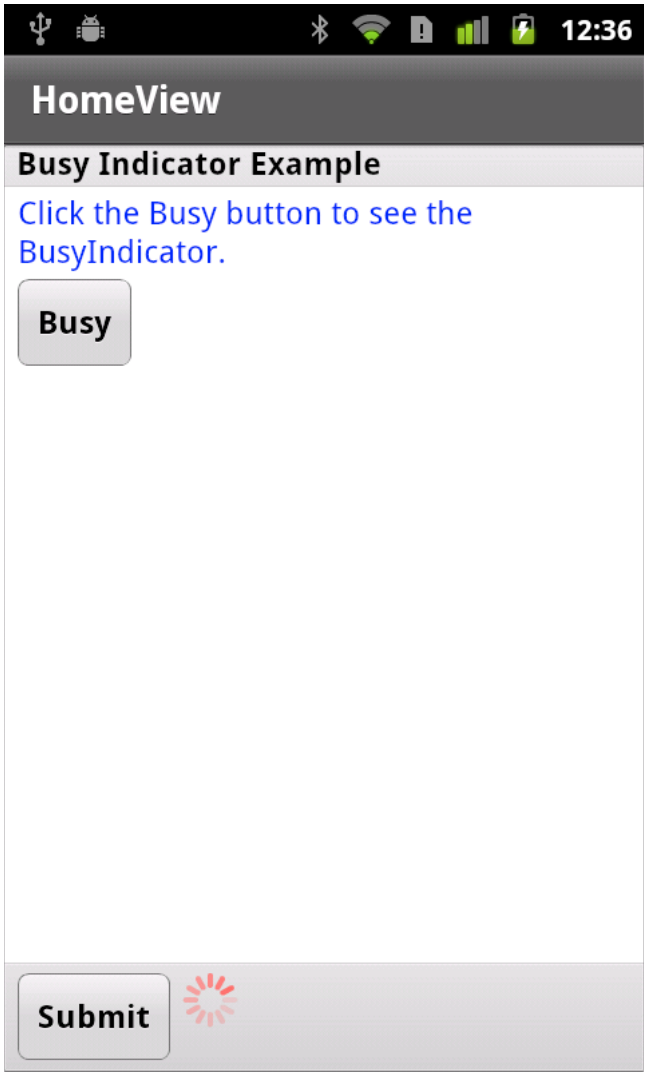

Make the BusyIndicator control visible while a long-running operation is in progress. When the operation is complete, hide the control.

For example, you can create an instance of the BusyIndicator control in an event handler, possibly the event handler that starts the long-running process. In the event handler, call the `addElement()` method to add the control to a container. When the process is complete, call `removeElement()` to remove the BusyIndicator control from the container.

Another option is to use the `visible` property of the control to show and hide it. In the following example, you add the BusyIndicator control to the control bar area of a Spark Panel container in a View container:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- components\mobile\views\SimpleBusyIndicatorHomeView.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    title="HomeView">

    <s:Panel id="panel" title="Busy Indicator Example"
        width="100%" height="100%">
        <s:controlBarContent>
            <s:Button label="Submit" />
            <s:BusyIndicator id="bi"
                visible="false"
                symbolColor="red"/>
        </s:controlBarContent>

        <s:VGroup left="10" right="10" top="10" bottom="10">
            <s:Label width="100%" color="blue"
                text="Click the Busy button to see the BusyIndicator."/>
            <s:Button label="Busy"
                click="{bi.visible = !bi.visible}" />
        </s:VGroup>
    </s:Panel>
</s:View>
```

In this example, the `visible` property of the BusyIndicator control is initially set to `false` to hide it. Click the Busy button to set the `visible` property to `true` to show the control.

The BusyIndicator control only spins when it is visible. Therefore, when you set the `visible` property to `false`, the control does not require any processing cycles.

Note: *Setting the `visible` property to `false` hides the control, but the control is still included in the layout of its parent container. To exclude the control from layout, set the `visible` and `includeInLayout` properties to `false`.*

The Spark BusyIndicator control does not support skinning. However, you can use styles to set the color and rotation interval of the spinner. In the previous example, you set the color of the indicator by using the `symbolColor` property.

Add a toggle switch to a mobile application

The Spark ToggleSwitch control defines a simple binary switch. The control consists of thumb and a track along which you slide the thumb. The following image shows the ToggleSwitch control in an application:

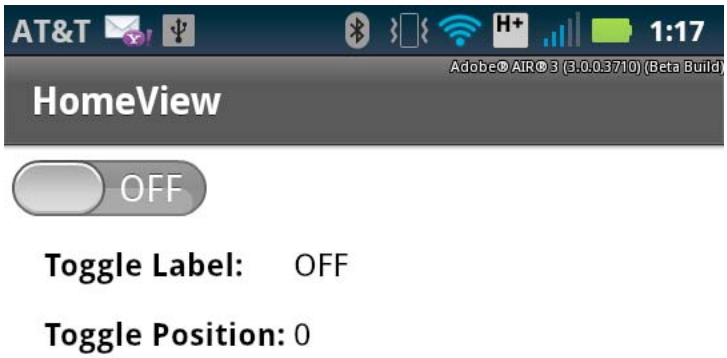

The ToggleSwitch control has two positions: selected and unselected. By default, the label OFF corresponds to the unselected position and ON corresponds to the selected position.

The control is in the unselected position when the thumb is to the left. The selected position is when the thumb is to the right. In the previous example, the switch is in the unselected position. Clicking anywhere in the control toggles its position.

The ToggleSwitch control is similar to the ToggleButton and CheckBox controls. These controls all let you choose between a selected and an unselected value.

You can slide the thumb along the track to change position. When you release the thumb, it moves to the position, selected or unselected, that is closest to the thumb location.

Shown below is the View container that defines the ToggleSwitch control shown in the previous figure:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- components\mobile\views\ToggleSwitchSimpleHomeView.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    title="HomeView">
    <s:layout>
        <s:VerticalLayout
            paddingTop="10" paddingLeft="5"/>
    </s:layout>
    <s:ToggleSwitch id="ts"
        slideDuration="1000"/>
    <s:Form>
        <s:FormItem label="Toggle Label: ">
            <s:Label text="{ts.selected ? 'ON' : 'OFF'}"/>
        </s:FormItem>
        <s:FormItem label="Toggle Position: ">
            <s:Label text="{ts.thumbPosition}"/>
        </s:FormItem>
    </s:Form>
</s:View>
```

In this example, you display ON or OFF in the first Label control based on the thumb position. The second label control displays the current thumb position as a value between 0.0 (unselected0 and 1.0 (selected). This example also sets the `slideDuration` style to 1000. This style determines the duration, in milliseconds, for an animation of the thumb as it slides between the selected and unselected positions.

Shown below is the main application file:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- components\mobile\ToggleSwitchSimple.mxml -->
<s:ViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    firstView="views.ToggleSwitchSimpleHomeView">
</s:ViewNavigatorApplication>
```

In the previous example, the ToggleSwitch control uses the default values for the unselected and selected labels: OFF (unselected) and ON (selected). To customize the labels or other visual characteristics of the control, define a skin class as a subclass of spark.skins.mobile.ToggleSwitchSkin or create your own skin class.

The following skin class changes the labels to Yes and No:

```
package skins
// components\mobile\skins\MyToggleSwitchSkin.as
{
    import spark.skins.mobile.ToggleSwitchSkin;

    public class MyToggleSwitchSkin extends ToggleSwitchSkin
    {
        public function MyToggleSwitchSkin()
        {
            super();
            // Set properties to define the labels
            // for the selected and unselected positions.
            selectedLabel="Yes";
            unselectedLabel="No";
        }
    }
}
```

The following View container uses this skin class:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- components\mobile\views\ToggleSwitchSkinHomeView.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    title="HomeView">
    <s:layout>
        <s:VerticalLayout
            paddingTop="10" paddingLeft="5"/>
    </s:layout>

    <s:ToggleSwitch id="ts"
        slideDuration="1000"
        skinClass="skins.MyToggleSwitchSkin"/>

    <s:Form>
        <s:FormItem label="Toggle Label: ">
            <s:Label text="{ts.selected ? 'Yes' : 'No'}"/>
        </s:FormItem>
        <s:FormItem label="Toggle Position: ">
            <s:Label text="{ts.thumbPosition}"/>
        </s:FormItem>
    </s:Form>
</s:View>
```

Adding a callout container to a mobile application

In a mobile application, a callout is a container that pops up on top of the application. The container can hold one or more components, and supports different types of layouts.

A callout container can be modal or nonmodal. A modal container takes all keyboard and mouse input until it is closed. A nonmodal container allows other components in the application to accept input while the container is open.

Flex provides two components that you can use to add callout containers to a mobile application: CalloutButton and Callout.

Using the CalloutButton control to create a callout container

The CalloutButton control provides a simple way to create a callout container. The component lets you define the components that appear in the callout and to set the container layout.

When you select the CalloutButton control in a mobile application, the control opens the callout container. Flex automatically draws an arrow from the callout container back to the CalloutButton control, as the following figure shows:

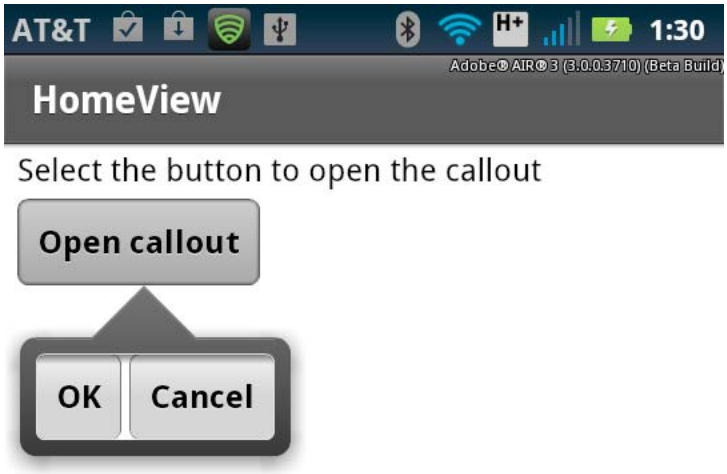

The following example shows the mobile application that creates the CalloutButton shown in the previous figure:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- components\mobile\views\CalloutButtonSimpleHomeView.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    title="HomeView">
    <s:layout>
        <s:VerticalLayout
            paddingLeft="10" paddingTop="10"/>
    </s:layout>

    <s:Label text="Select the button to open the callout"/>

    <s:CalloutButton id="myCB"
        horizontalPosition="end"
        verticalPosition="after"
        label="Open callout">
        <s:calloutLayout>
            <s:HorizontalLayout/>
        </s:calloutLayout>

        <!-- Define buttons that appear in the callout. -->
        <s:Button label="OK"
            click="myCB.closeDropDown();"/>
        <s:Button label="Cancel"
            click="myCB.closeDropDown();"/>
    </s:CalloutButton>
</s:View>
```

The CalloutButton control defines two Button controls that appear inside the callout container. The CalloutButton control also specifies to use HorizontalLayout as the layout of the callout container. By default, the container uses BasicLayout.

The callout container opens when the user selects the CalloutButton control, or when you call the `CalloutButton.openDropDown()` method. The `horizontalPosition` and `verticalPosition` properties determine the position of the callout container relative to the CalloutButton control. For an example, see "Sizing and positioning a callout container" on page 81.

The callout container opened by the CalloutButton is always nonmodal. That means other components in the application can receive input while the callout is open. Use the Callout container to create a modal callout.

The callout container stays open until you click outside the callout container, or you call the `CalloutButton.closeDropDown()` method. In this example, you call the `closeDropDown()` method in the event handler for the `click` event for the two Button controls in the callout container.

Using the Callout container to create a callout

The CalloutButton control encapsulates in a single control the callout container and all of the logic necessary to open and close the callout. The CalloutButton control is then said to be the *host* of the callout container.

You can also use the Callout container in a mobile application. The advantage of a Callout container is that it is not associated with a single host, and is therefore reusable anywhere in the application.

Use the `Callout.open()` and `Callout.close()` methods to open a Callout container, typically in response to an event. When you call the `open()` method, you can pass an optional argument to specify that the callout container is modal. By default, the callout container is nonmodal.

The position of the callout container is relative to the host component. The `horizontalPosition` and `verticalPosition` properties determine the container's location relative to the host. For an example, see "Sizing and positioning a callout container" on page 81.

Because it is a pop-up, you do not create a Callout container as part of the normal MXML layout code of your application. Instead, you define the Callout container as a custom MXML component in an MXML file.

In the following example, define a Callout container in the file MyCallout.mxml in the comps directory of your application:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- components\mobile\comps\MyCallout.mxml -->
<s:Callout xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    horizontalPosition="start"
    verticalPosition="after">

    <s:VGroup
        paddingTop="10" paddingLeft="5" paddingRight="10">

        <s:HGroup verticalAlign="middle">
            <s:Label text="First Name: "
                fontWeight="bold"/>
            <s:TextInput width="225"/>
        </s:HGroup>

        <s:HGroup verticalAlign="middle">
            <s:Label text="Last Name: "
                fontWeight="bold"/>
            <s:TextInput width="225"/>
        </s:HGroup>

        <s:HGroup>
            <s:Button label="OK" click="close();"/>
            <s:Button label="Cancel" click="close();"/>
        </s:HGroup>
    </s:VGroup>
</s:Callout>
```

MyCallout.mxml defines a simple callout to let a user enter a first and last name. Notice that the buttons call the `close()` method to close the callout in response to a `click` event.

The following example shows a View container that opens MyCallout.mxml in response to a `click` event:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- components\mobile\views\CalloutSimpleHomeView.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    title="HomeView">
    <s:layout>
        <s:VerticalLayout
            paddingLeft="10" paddingTop="10"/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import comps.MyCallout;

            // Event handler to open the Callout component.
            protected function button1_clickHandler(event:MouseEvent):void {
                var myCallout:MyCallout = new MyCallout();
                // Open as a modal callout.
                myCallout.open(calloutB, true);
            }
        ]]>
    </fx:Script>

    <s:Label text="Select the button to open the callout"/>
    <s:Button id="calloutB"
        label="Open Callout container"
        click="button1_clickHandler(event);"/>
</s:View>
```

First, import the MyCallout.mxml component into the application. In response to a `click` event, the button named calloutB creates an instance of MyCallout.mxml, and then calls the `open()` method.

The `open()` method species two arguments. The first argument specifies that calloutB is the host component of the callout. Therefore, the callout positions itself in the application relative to the location of calloutB. The second argument is `true` to create a modal callout.

Defining an inline Callout container

You do not have to define the Callout container in a separate file. The following example uses the `<fx:Declaration>` tag to define it as an inline component of a View container:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- components\mobile\views\CalloutInlineHomeView.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    title="HomeView">
    <s:layout>
        <s:VerticalLayout
            paddingLeft="10" paddingTop="10"/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            // Event handler to open the Callout component.
            protected function button1_clickHandler(event:MouseEvent):void {
                var myCallout:MyCallout = new MyCallout();
                // Open as a modal callout.
                myCallout.open(calloutB, true);
            }
        ]]>
    </fx:Script>

    <fx:Declarations>
        <fx:Component className="MyCallout">
            <s:Callout
                horizontalPosition="end"
                verticalPosition="after">
                <s:VGroup
                    paddingTop="10" paddingLeft="5" paddingRight="10">
                    <s:HGroup verticalAlign="middle">
                        <s:Label text="First Name: "
                                 fontWeight="bold"/>
                        <s:TextInput width="225"/>
                    </s:HGroup>
                    <s:HGroup verticalAlign="middle">
                        <s:Label text="Last Name: "
                                 fontWeight="bold"/>
                        <s:TextInput width="225"/>
                    </s:HGroup>
                    <s:HGroup>
                        <s:Button label="OK" click="close();"/>
                        <s:Button label="Cancel" click="close();"/>
                    </s:HGroup>
                </s:VGroup>
            </s:Callout>
        </fx:Component>
    </fx:Declarations>

    <s:Label text="Select the button to open the callout"/>
    <s:Button id="calloutB"
        label="Open Callout container"
        click="button1_clickHandler(event);"/>
</s:View>
```

Passing data back from the Callout container

Use the `close()` method of the Callout container to pass data back to the main application. The `close()` method has the following signature:

```
public function close(commit:Boolean = false, data:*):void
```

where:

- `commit` contains `true` if the application should commit the returned data.
- `data` specifies the returned data.

Calling the `close()` method dispatches a `close` event. The event object associated with the `close` event is an object of type spark.events.PopUpEvent.The PopUpEvent class defines two properties, `commit` and `data`, that contain the values of the corresponding arguments to the `close()` method. Use these properties in the event handler of the `close` event to inspect any data returned from the callout.

The callout container is a subclass of the SkinnablePopUpContainer class, which uses the same mechanism to pass data back to the main application. For an example of passing data back from the SkinnablePopUpContainer container, see Passing data back from the Spark SkinnablePopUpContainer container.

The following example modifies the Callout component shown above to return the first and last name values:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- components\mobile\comps\MyCalloutPassBack.mxml -->
<s:Callout xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    horizontalPosition="start"
    verticalPosition="after">

    <fx:Script>
        <![CDATA[
            import spark.events.IndexChangeEvent;

            public var retData:String = new String();

            // Event handler for the click event of the OK button.
            protected function clickHandler(event:MouseEvent):void {
                //Create the return data.
                retData = firstName.text + " " + lastName.text;
                // Close the Callout.
                // Set the commit argument to true to indicate that the
                // data argument contians a vaild value.
                close(true, retData);
            }

        ]]>
```

```
    </fx:Script>

    <s:VGroup
        paddingTop="10" paddingLeft="5" paddingRight="10">
        <s:HGroup verticalAlign="middle">
            <s:Label text="First Name: "
                     fontWeight="bold"/>
            <s:TextInput id="firstName" width="225"/>
        </s:HGroup>
        <s:HGroup verticalAlign="middle">
            <s:Label text="Last Name: "
                     fontWeight="bold"/>
            <s:TextInput id="lastName" width="225"/>
        </s:HGroup>
        <s:HGroup>
            <s:Button label="OK" click="clickHandler(event);"/>
            <s:Button label="Cancel" click="close();"/>
        </s:HGroup>
    </s:VGroup>
</s:Callout>
```

In this example, you create a String to return the first and mast names in response to the user selecting the OK button.

The View container then uses the close event on the Callout to display the returned data:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- components\mobile\views\CalloutPassBackDataHomeView.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark"
        title="HomeView">
    <s:layout>
        <s:VerticalLayout
            paddingLeft="10" paddingTop="10"/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import comps.MyCalloutPassBack;
            import spark.events.PopUpEvent;

            public var myCallout:MyCalloutPassBack = new MyCalloutPassBack();
            // Event handler to open the Callout component.
            protected function clickHandler(event:MouseEvent):void {
                // Add an event handler for the close event to check for
                // any returned data.
                myCallout.addEventListener('close', closeHandler);
                // Open as a modal callout.
                myCallout.open(calloutB, true);
            }

            // Handle the close event from the Callout.
            protected function closeHandler(event:PopUpEvent):void {
```

```
                // If commit is false, no data is returned.
                if (!event.commit)
                    return;

                // Write the returned Data to the TextArea control.
                myTA.text = String(event.data);

                // Remove the event handler.
                myCallout.removeEventListener('close', closeHandler);
            }

        ]]>
    </fx:Script>

    <s:Label text="Select the button to open the callout"/>
    <s:Button id="calloutB"
        label="Open Callout container"
        click="clickHandler(event);"/>
    <s:TextArea id="myTA"/>
</s:View>
```

Adding a ViewNavigator to a Callout

You can use a ViewNavigator in a Callout container. For example, the following View opens a Callout container defined in the file MyCalloutPassBackVN:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- components\mobile\views\CalloutPassBackDataHomeView.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    title="HomeView">
    <s:layout>
        <s:VerticalLayout
            paddingLeft="10" paddingTop="10"/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import comps.MyCalloutPassBackVN;
            import spark.events.PopUpEvent;

            public var myCallout:MyCalloutPassBackVN = new MyCalloutPassBackVN();

            // Event handler to open the Callout component.
            protected function clickHandler(event:MouseEvent):void {
                myCallout.addEventListener('close', closeHandler);
                myCallout.open(calloutB, true);
```

```
            }

            // Handle the close event from the Callout.
            protected function closeHandler(event:PopUpEvent):void {
                if (!event.commit)
                    return;

                myTA.text = String(event.data);
                myCallout.removeEventListener('close', closeHandler);
            }
        ]]>
    </fx:Script>

    <s:Label text="Select the Open button to open the callout"/>
    <s:TextArea id="myTA"/>
    <s:actionContent>
        <s:Button id="calloutB" label="Open"
            click="clickHandler(event);"/>
    </s:actionContent>
</s:View>
```

The MyCalloutPassBackVN.mxml file defines a ViewNavigator container with a single View:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- components\mobile\comps\MyCalloutVN.mxml -->
<s:Callout xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    contentBackgroundAppearance="none"
    horizontalPosition="start"
    verticalPosition="after">

    <fx:Script>
        <![CDATA[
            import mx.events.FlexMouseEvent;
            import views.SettingsView;

            protected function done_clickHandler(event:MouseEvent):void {
                // Create an instance of SettingsView, and
                // initialize it as a copy of the current View of the ViewNavigator.
                var settings:SettingsView = (viewNav.activeView as SettingsView);

                // Create the String to represent the returned data.
                var retData:String = new String();
                // Initialze the String from the current View.
                retData = settings.firstName.text + " " + settings.lastName.text;
                // Close the Callout and return thhe data.
                this.close(true, retData);
            }
        ]]>
    </fx:Script>

    <s:ViewNavigator id="viewNav" width="100%" height="100%" firstView="views.SettingsView">
        <s:navigationContent>
            <s:Button label="Cancel" click="close(false)"/>
        </s:navigationContent>
        <s:actionContent>
          <s:Button id="done" label="OK" emphasized="true" click="done_clickHandler(event);"/>
        </s:actionContent>
    </s:ViewNavigator>
</s:Callout>
```

In MyCalloutPassBackVN.mxml, you specify that the first view of the ViewNavigator is SettingsView. SettingsView defines TextInput controls for a users first and last name. When the user selects the OK button, you close the Callout and pass back any returned data to MyCalloutPassBackVN.

The following figure shows the application with the Callout open:

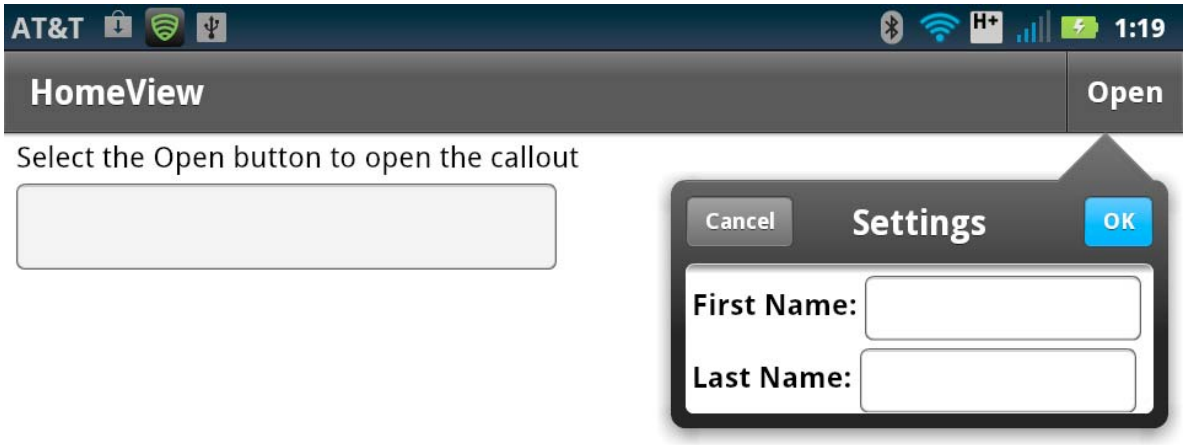

Shown below is SettingsView.mxml:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- components\mobile\views\SettingsView.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark"
        title="Settings">

    <s:VGroup
        paddingTop="10" paddingLeft="5" paddingRight="10">
        <s:HGroup verticalAlign="middle">
            <s:Label text="First Name: "
                fontWeight="bold"/>
            <s:TextInput id="firstName" width="225"/>
        </s:HGroup>
        <s:HGroup verticalAlign="middle">
            <s:Label text="Last Name: "
                fontWeight="bold"/>
            <s:TextInput id="lastName" width="225"/>
        </s:HGroup>
    </s:VGroup>
</s:View>
```

Sizing and positioning a callout container

The CalloutButton control and Callout container use two properties to specify the location of the callout container relative to its host: `horizontalPosition` and `verticalPosition`. These properties can have the following values: "`before`", "`start`", "`middle`", "`end`", "`after`", and "`auto`" (default).

For example, you set these properties as shown below:

```
horizontalPosition="before"
verticalPosition="after"
```

The callout container opens to the left, and below the host component. If you set them as below:

```
horizontalPosition="middle"
verticalPosition="middle"
```

The callout container opens on top of the host component with the center of the callout aligned to the center of the host component.

For all but five combinations of the `horizontalPosition` and `verticalPosition` properties, the callout draws an arrow pointing to the host. The five positions where no arrow appears are when the callout is centered over the middle of the host, and when it is in a corner position. The following combinations show no arrow:

```
// Centered
horizontalPosition="middle"
verticalPosition="middle"

// Upper-left corner
horizontalPosition="before"
verticalPosition="before"

// Lower-left corner
horizontalPosition="before"
verticalPosition="after"

// Upper-right corner
horizontalPosition="after"
verticalPosition="before"

// Lower-right corner
horizontalPosition="after"
verticalPosition="after"
```

For the Callout container, the `horizontalPosition` and `verticalPosition` properties also determine the value of the read-only `Callout.arrowDirection` property. The position of the callout container relative to the host determines the value of the `arrowDirection` property. Possible values are `"up"`, `"left"`, and others.

The `Callout.arrow` skin part uses the value of the `arrowDirection` property to draw the arrow based on the position of the callout.

Managing memory for a callout container

One consideration when using a callout container is how to manage the memory used by the callout. For example, if you want to reduce the memory used of the application, create an instance of the callout each time it opens. The callout is then destroyed when it closes. However, make sure to remove all references to the callout, especially event handlers, or else the callout is not destroyed.

Alternatively, if the callout container is relatively small, you can reuse the same callout multiple times in the application. In this configuration, the application creates a single instance of the callout. It then reuses that instance and the callout stays in memory between uses. This configuration reduces execution time in the application because the application does not have to re-create the callout every time it is opened.

To configure the callout used by the CalloutButton control, set the `CalloutButton.calloutDestructionPolicy` property. A value of `"auto"` configures the control to destroy the callout when it is closed. A value of `"never"` configures the control to cache the callout in memory.

The Callout container does not define the `calloutDestructionPolicy` property. Instead, control its memory use by how you create an instance of the callout container in your application. In the following example, you create an instance of the callout container every time you open it:

```
protected function button1_clickHandler(event:MouseEvent):void {
    // Create a new instance of the callout container every time you open it.
    var myCallout:MyCallout = new MyCallout();
    myCallout.open(calloutB, true);
}
```

Alternatively, you can define a single instance of the callout container that you reuse every time you open it:

```
// Create a single instance of the callout container.
public var myCallout:MyCallout = new MyCallout();

protected function button1_clickHandler(event:MouseEvent):void {
    myCallout.open(calloutB, true);
}
```

Define transitions in a mobile application

Spark view transitions define how a change from one View container to another appears as it occurs on the screen. Transitions work by applying an animation during the view change. Use transitions to create compelling interfaces for your mobile applications.

By default, the existing View container slides off the screen as the new view slides onto the screen. Alternatively, you can customize the change. For example, your application defines a form in a View container that shows only a few fields, but a subsequent View container shows additional fields. Rather than sliding from view to view, you can use a flip or fade transition.

Flex supplies the following view transition classes that you can use when changing View containers:

Transition	Description
CrossFadeViewTransition	Performs a crossfade transition between the existing and new views. The the existing view fades out as the new view fades in.
FlipViewTransition	Performs a flip transition between the existing and new views. You can define the flip direction and type.
SlideViewTransition	Performs a slide transition between the existing and new views. The existing view slides out as the new view slides in. You can control the slide direction and type. This transition is the default view transition used by Flex.
ZoomViewTransition	Performs a zoom transition between the existing and new views. You can either zoom out the existing view or zoom in to the new view.

Note: *View transitions in mobile applications are not related to standard Flex transitions. Standard Flex transitions define the effects played during a change of state. Navigation operations of the ViewNavigator container trigger View transitions. View transitions cannot be defined in MXML, and they do not interact with states.*

Apply a transition

You apply a transition when you change the active View container. Because view transitions occur when you change View containers, you control them through the ViewNavigator container.

For example, you can use the following methods of the ViewNavigator class to change the current view:

- `pushView()`
- `popView()`
- `popToFirstView()`
- `popAll()`
- `replaceView()`

These methods all take an optional argument that defines the transition to play when changing views.

You can also change the current view by using hardware navigation keys on your device, such as the back button. When you change the view by using a hardware key, the ViewNavigator uses the default transitions defined by the `ViewNavigator.defaultPopTransition` and `ViewNavigator.defaultPushTransition` properties. By default, these properties specify to use the SlideViewTransition class.

The following example shows the main application file that initializes the `defaultPopTransition` and `defaultPushTransition` properties to use a FlipViewTransition:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\SparkViewTrans.mxml -->
<s:ViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    firstView="views.EmployeeMainViewTrans"
    creationComplete="creationCompleteHandler(event);">

    <fx:Script>
        <![CDATA[
            import mx.events.FlexEvent;
            import spark.transitions.FlipViewTransition;

            // Define a flip transition.
            public var flipTrans:FlipViewTransition = new FlipViewTransition();

            // Set the default push and pop transitions of the navigator
            // to use the flip transition.
            protected function creationCompleteHandler(event:FlexEvent):void {
                navigator.defaultPopTransition = flipTrans;
                navigator.defaultPushTransition = flipTrans;
            }

            protected function button1_clickHandler(event:MouseEvent):void {
                // Switch to the first view in the section.
                // Use the default pop view transition defined by
                // the ViewNavigator.defaultPopTransition property.
                navigator.popToFirstView();
            }
        ]]>
    </fx:Script>

    <s:navigationContent>
        <s:Button icon="@Embed(source='assets/Home.png')"
            click="button1_clickHandler(event)"/>
    </s:navigationContent>
</s:ViewNavigatorApplication>
```

The first view, the EmployeeMainViewTrans.mxml, defines a CrossFadeViewTransition. It then passes the CrossFadeViewTransition as an argument to the `pushView()` method on a change to the EmployeeView:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\views\EmployeeMainViewTrans.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    title="Employees">
    <s:layout>
        <s:VerticalLayout paddingTop="10"/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import spark.events.IndexChangeEvent;
            import spark.transitions.CrossFadeViewTransition;

            // Define two transitions: a cross fade and a flip.
            public var xFadeTrans:CrossFadeViewTransition = new CrossFadeViewTransition();

            // Use the cross fade transition on a push(),
            // with a duration of 100 ms.
            protected function myList_changeHandler(event:IndexChangeEvent):void {
                xFadeTrans.duration = 1000;
               navigator.pushView(views.EmployeeView, myList.selectedItem, null, xFadeTrans);
            }
        ]]>
    </fx:Script>

    <s:Label text="Select an employee name"/>
    <s:List id="myList"
        width="100%" height="100%"
        labelField="firstName"
        change="myList_changeHandler(event);">
        <s:ArrayCollection>
            <fx:Object firstName="Bill" lastName="Smith" companyID="11233"/>
            <fx:Object firstName="Dave" lastName="Jones" companyID="13455"/>
            <fx:Object firstName="Mary" lastName="Davis" companyID="11543"/>
            <fx:Object firstName="Debbie" lastName="Cooper" companyID="14266"/>
        </s:ArrayCollection>
    </s:List>
</s:View>
```

The EmployeeView is defined in the file EmployeeView.mxml, as shown in the following example:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\views\EmployeeView.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    title="Employee View">
    <s:layout>
        <s:VerticalLayout paddingTop="10"/>
    </s:layout>

    <s:VGroup>
        <s:Label text="{data.firstName}"/>
        <s:Label text="{data.lastName}"/>
        <s:Label text="{data.companyID}"/>
    </s:VGroup>
</s:View>
```

Apply a transition to the ActionBar control

By default, the ActionBar is not included in the transition from one view to another. Instead, the ActionBar control uses a slide transition when the view changes, regardless of the specified transition. To include the ActionBar in the transition when the view changes, set the `transitionControlsWithContent` property of the transition class to `true`.

Use an easing class with a transition

A transition plays in two phases: an *acceleration phase* followed by a *deceleration phase*. You can change the acceleration and deceleration properties of a transition by using an easing class. With easing, you can create a more realistic rate of acceleration and deceleration. You can also use an easing class to create a bounce effect or control other types of motion.

Flex supplies the Spark easing classes in the spark.effects.easing package. This package includes classes for the most common types of easing, including Bounce, Linear, and Sine easing. For more information on using these classes, see the Using Spark easing classes.

The following example shows a modification to the application defined in the previous section. This version adds a Bounce easing class to the FlipViewTransition:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\SparkViewTransEasier.mxml -->
<s:ViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    firstView="views.EmployeeMainViewTransEaser"
    creationComplete="creationCompleteHandler(event);">

    <fx:Script>
        <![CDATA[
            import mx.events.FlexEvent;
            import spark.transitions.FlipViewTransition;

            // Define a flip transition.
            public var flipTrans:FlipViewTransition = new FlipViewTransition();

            // Set the default push and pop transitions of the navigator
            // to use the flip transition.
            // Specify the Bounce class as the easer for the flip.
            protected function creationCompleteHandler(event:FlexEvent):void {
                flipTrans.easer = bounceEasing;
```

```
                flipTrans.duration = 1000;
                navigator.defaultPopTransition = flipTrans;
                navigator.defaultPushTransition = flipTrans;
            }

            protected function button1_clickHandler(event:MouseEvent):void {
                // Switch to the first view in the section.
                // Use the default pop view transition defined by
                // the ViewNavigator.defaultPopTransition property.
                navigator.popToFirstView();
            }
        ]]>
    </fx:Script>

    <fx:Declarations>
        <s:Bounce id="bounceEasing"/>
    </fx:Declarations>

    <s:navigationContent>
        <s:Button icon="@Embed(source='assets/Home.png')"
                  click="button1_clickHandler(event)"/>
    </s:navigationContent>
</s:ViewNavigatorApplication>
```

To see the bounce, make sure to use the back button on the device.

View transition lifecycle

A view transition goes through two main phases during execution: the *preparation* phase and the *execution* phase.

Three methods of the transition class define the preparation phase. These methods are called in the following order:

1 `captureStartValues()`

When this method is called, the ViewNavigator has created the new view but has not validated the new view or updated the content of the ActionBar control and the tab bar. Use this method to capture the start values for the components that play a role in the transition.

2 `captureEndValues()`

When this method is called, the new view has been fully validated, and the ActionBar control and the tab bar reflect the state of the new view. The transition can use this method to capture any values it requires from the new view.

3 `prepareForPlay()`

This method lets the transition initialize the effect instance that is used to animate the components of the transition.

The execution phase begins when the ViewNavigator calls the transition's `play()` method. At this time, the new view has been created and validated, and the ActionBar control and the tab bar have been initialized. The transition dispatches a `start` event, and any effect instances created during the preparation phase are now invoked by calling the effect's `play()` method.

When the view transition completes, the transition dispatches an `end` event. The transitions base class, ViewTransitionBase, defines the `transitionComplete()` method that you can call to dispatch the `end` event. It is important that the transition cleans up any temporary objects and remove listeners that it has created before dispatching the completion event.

After the call to the `transitionComplete()` method, the ViewNavigator finalizes the view changing process and resets the transition to its uninitialized state.

Select dates and times in a mobile application

The DateSpinner control lets users select dates and times in a mobile application. It uses the familiar mobile interface of a series of adjacent scroll wheels, with each wheel showing a different part of the date and/or time.

There are three basic types of DateSpinner controls that you can use. The following figure shows the three types of DateSpinner controls:

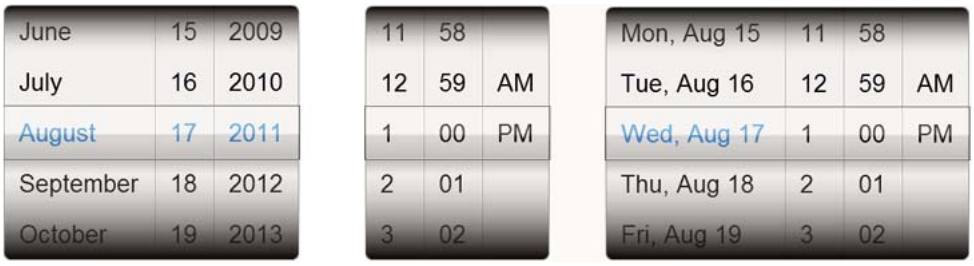

A. Date. B. Time. C. Date and Time

The following table describes the DateSpinner types:

Type	Constant (String equivalent)	Description
Date	`DateSelectorDisplayMode.DATE` ("date")	Displays the month, day of month, and year. For example: `|| June || 11 || 2011 ||` Date is the default type. If you do not set the `displayMode` property of a DateSpinner control, Flex sets it to date. The current date is highlighted with the color defined by the `accentColor` style property. The earliest date supported is January 1, 1601. The latest supported date is December 31, 9999.
Time	`DateSelectorDisplayMode.TIME` ("time")	Displays the hours and minutes. For locales that use 12-hour time, also displays the AM/PM indicator. For example: `|| 2 || 57 || PM ||` The current time is not highlighted. You cannot display seconds in the DateSpinner control. You cannot toggle between the 12 hour and 24 hour time formats. The DateSpinner uses the format that is typical for the current locale.

Type	Constant (String equivalent)	Description
Date and Time	`DateSelectorDisplayMode.DATE_AND_TIME` ("dateAndTime")	Displays the day, hours, and minutes. For locales that use 12-hour time, also displays the AM/PM indicator. For example: `|| Mon Jun 13 || 2 || 57 || PM ||` The current date is highlighted with the color defined by the `accentColor` style property. The current time is not highlighted. You cannot display seconds in the DateSpinner control. The month name is displayed in a shortened format. Does not display the year.

The DateSpinner control is made up of several SpinnerList controls. Each SpinnerList displays a list of valid values for a particular place in the DateSpinner control. For example, a DateSpinner control that shows the date has three SpinnerLists: one for the day, one for the month, and one for the year. A DateSpinner that shows only the time will have two or three SpinnerLists: one for hours, one for minutes, and optionally one for AM/PM (if the time is represented in 12 hour increments).

Change the type of a DateSpinner control

You select the type of DateSpinner by setting the value of the `displayMode` property on the control. You can set the `displayMode` property to the constants defined by the DateSelectionDisplayMode class or their string equivalents.

The following example lets you toggle the different DateSpinner types:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- datespinner/views/DateSpinnerTypes.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark"
        title="DateSpinner Types">
    <s:layout>
        <s:VerticalLayout/>
    </s:layout>
    <fx:Script>
        <![CDATA[
            import spark.components.calendarClasses.DateSelectorDisplayMode;
        ]]>
    </fx:Script>

    <s:ComboBox id="modeList" selectedIndex="0"
change="ds1.displayMode=modeList.selectedItem.value">
        <s:ArrayList>
            <fx:Object value="date" label="Date"/>
            <fx:Object value="time" label="Time"/>
            <fx:Object value="dateAndTime" label="Date and Time"/>
        </s:ArrayList>
    </s:ComboBox>
    <s:DateSpinner id="ds1" displayMode="{DateSelectorDisplayMode.DATE}"/>

    <s:Label text="{ds1.selectedDate}"/>

</s:View>
```

When users interact with the DateSpinner control, the spinners snap to the closest item in the list. At rest, the spinners are never between selections.

Bind a DateSpinner control selection to other controls

You can bind the `selectedDate` property of a DateSpinner control to other controls in a mobile application. The `selectedDate` property is a pointer to a Date object, so any methods or properties of a Date object are accessible in this manner.

The following example binds the day, month, and year to the Label controls:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- datespinner/views/DateSpinnerBinding.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark"
        title="DateSpinner Binding">
    <s:layout>
        <s:VerticalLayout/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import spark.components.calendarClasses.DateSelectorDisplayMode;

            [Bindable]
            private var dayArray:Array = new Array(
                "Sunday","Monday","Tuesday",
                "Wednesday","Thursday","Friday","Saturday");
        ]]>
    </fx:Script>

    <s:DateSpinner id="ds1" displayMode="{DateSelectorDisplayMode.DATE}"/>

    <s:Label id="label1" text="Day: {dayArray[ds1.selectedDate.day]}"/>
    <s:Label id="label2" text="Day of month: {ds1.selectedDate.date}"/>
    <s:Label id="label3" text="Month: {ds1.selectedDate.month+1}"/>
    <s:Label id="label4" text="Year: {ds1.selectedDate.fullYear}"/>

</s:View>
```

Select dates programmatically in a DateSpinner control

You can change the date in a DateSpinner control programmatically by assigning a new Date object to the value of the `selectedDate` property.

The following example prompts you to enter a day, month, and year. When you click the button, the DateSpinner changes to the new date:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- datespinner/views/DateSpinnerProgrammaticSelection.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark"
        title="DateSpinner Programmatic Selection"
        creationComplete="init()">
    <s:layout>
        <s:VerticalLayout/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import mx.events.FlexEvent;
          import spark.components.calendarClasses.DateSelectorDisplayMode;

            private function init():void {
                // change event is dispatched when DateSpinner changes from user interaction
                ds1.addEventListener("change", spinnerEventHandler);
                // valueCommit event is dispatched when DateSpinner programmatically changes
                ds1.addEventListener("valueCommit", spinnerEventHandler);
            }

            private function b1_clickHandler(e:Event):void {
                ds1.selectedDate = new Date(ti3.text,ti1.text,ti2.text);
            }

            protected function spinnerEventHandler(event:Event):void {
                eventLabel.text = event.type;
            }
        ]]>
    </fx:Script>

    <s:TextInput id="ti1" prompt="Enter a Month"/>
    <s:TextInput id="ti2" prompt="Enter a Day"/>
    <s:TextInput id="ti3" prompt="Enter a Year"/>
    <s:Button id="b1" label="Go!" click="b1_clickHandler(event)"/>

    <s:DateSpinner id="ds1" displayMode="{DateSelectorDisplayMode.DATE}"/>

    <s:Label id="eventLabel"/>

</s:View>
```

When the date is changed programmatically, the DateSpinner control dispatches both a `change` and a `value_commit` event. When the date is changed through user interaction, the DateSpinner control dispatches a `change` event.

When the selected date is changed programmatically, the selected values snap into view without animating through the intermediate values.

Restrict date ranges in a DateSpinner control

You can restrict the dates that users can select in a DateSpinner control with the `minDate` and `maxDate` properties. These properties take Date objects. Any date earlier than the `minDate` property and any date after the `maxDate` property are not accessible in the DateSpinner control. In addition, invalid years are not shown in “date” mode and invalid dates are not shown in “dateAndTime” mode.

The following example creates two DateSpinner controls that have different ranges of available dates:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- datespinner/views/MinMaxDates.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    title="Min/Max Dates">
    <s:layout>
        <s:VerticalLayout/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import spark.components.calendarClasses.DateSelectorDisplayMode;
        ]]>
    </fx:Script>

    <!-- Min date today, max date October 31, 2012. -->
    <s:Label text="{dateSpinner1.selectedDate}"/>
    <s:DateSpinner id="dateSpinner1"
        displayMode="{DateSelectorDisplayMode.DATE}"
        minDate="{new Date()}"
        maxDate="{new Date(2012,9,31)}"/>
    <!-- Min date 3 days ago, max date 7 days from now. -->
    <s:Label text="{dateSpinner2.selectedDate}"/>
    <s:DateSpinner id="dateSpinner2"
        displayMode="{DateSelectorDisplayMode.DATE}"
        minDate="{new Date(new Date().getTime() - 1000*60*60*24*3)}"
        maxDate="{new Date(new Date().getTime() + 1000*60*60*24*7)}"/>
</s:View>
```

You can only set a single minimum date and a single maximum date. You cannot set an array of dates or multiple selection ranges.

You can also use the `minDate` and `maxDate` properties to restrict a DateSpinner in “time” mode. The following example limits the time selection to between 8 AM and 2 PM:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- datespinner/views/MinMaxTime.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark"
        title="Min/Max Time">
    <s:layout>
        <s:VerticalLayout/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import spark.components.calendarClasses.DateSelectorDisplayMode;
        ]]>
    </fx:Script>

    <!-- Limit time selection to between 8am and 2pm -->
    <s:DateSpinner id="dateSpinner1"
                   displayMode="{DateSelectorDisplayMode.TIME}"
                   minDate="{new Date(0,0,0,8,0)}"
                   maxDate="{new Date(0,0,0,14,0)}"/>

</s:View>
```

Respond to a DateSpinner control's events

The DateSpinner control dispatches a `change` event when the user changes the date. The `target` property of this `change` event holds a reference to the DateSpinner, which you can use to access the selected date, as the following example shows:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- datespinner/views/DateSpinnerChangeEvent.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark"
        title="DateSpinner Change Event">
    <s:layout>
        <s:VerticalLayout/>
    </s:layout>
    <fx:Script>
        <![CDATA[
            import spark.components.calendarClasses.DateSelectorDisplayMode;

            private var dayArray:Array = new Array(
                "Sunday","Monday","Tuesday",
                "Wednesday","Thursday","Friday","Saturday");

            private function ds1_changeHandler(e:Event):void {
                // Optionally cast the DateSpinner's selectedDate as a Date
                var d:Date = new Date(e.currentTarget.selectedDate);
                ta1.text = "You selected:";
                ta1.text += "\n Day of Week: " + dayArray[d.day];
                ta1.text += "\n Year: " + d.fullYear;
                // Month is 0-based in ActionScript, so add 1:
                ta1.text += "\n Month: " + int(d.month + 1);
                ta1.text += "\n Day: " + d.date;
            }
        ]]>
    </fx:Script>

    <s:DateSpinner id="ds1"
        displayMode="{DateSelectorDisplayMode.DATE}"
        change="ds1_changeHandler(event)"/>

    <s:TextArea id="ta1" height="200" width="350"/>
</s:View>
```

The `change` event is dispatched (and the value of the `selectedDate` property is updated) only when all spinners have stopped spinning from user interactions.

To capture the change of a date that was done programmatically, listen for the `value_commit` event.

Change the minute interval of a DateSpinner control

You can change the interval for the minutes that a DateSpinner control displays by using the `minuteStepSize` property. This property only applies to a DateSpinner control with the `displayMode` set to “time” or “dateAndTime”. For example, if you set the `minuteStepSize` property to 10, the DateSpinner control shows the values 0, 10, 20, 30, 40, and 50 in the minutes spinner.

The following example lets you set the value of the `minuteStepSize` property. The minute spinner updates accordingly.

```
<?xml version="1.0" encoding="utf-8"?>
<!-- datespinner/views/DateSpinnerMinuteInterval.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark"
        title="DateSpinner Minute Interval">
    <s:layout>
        <s:VerticalLayout/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import spark.components.calendarClasses.DateSelectorDisplayMode;
        ]]>
    </fx:Script>
    <s:Label text="Select an interval:"/>

    <s:ComboBox id="intervalList" selectedIndex="0"
        change="ds1.minuteStepSize=intervalList.selectedItem.value">
        <s:ArrayList>
            <fx:Object value="1" label="1"/>
            <fx:Object value="2" label="2"/>
            <fx:Object value="3" label="3"/>
            <fx:Object value="4" label="4"/>
            <fx:Object value="5" label="5"/>
            <fx:Object value="6" label="6"/>
            <fx:Object value="10" label="10"/>
            <fx:Object value="12" label="12"/>
            <fx:Object value="15" label="15"/>
            <fx:Object value="20" label="20"/>
            <fx:Object value="30" label="30"/>
        </s:ArrayList>
    </s:ComboBox>

    <s:DateSpinner id="ds1" displayMode="{DateSelectorDisplayMode.TIME}"/>
</s:View>
```

Valid values for the `minuteStepSize` property must be evenly divisible into 60. If you specify a value that is not evenly divisible into 60 (such as 25), the `minuteStepSize` property defaults to a value of 1.

If you specify a minute interval and the current time does not fall on a value in the minute spinner, the DateSpinner control rounds the current selection down to the closest interval. For example, if the time is 10:29, and the `minuteStepSize` is 15, the DateSpinner rounds to 10:15, assuming that the value of 10:15 does not violate the `minDate` setting.

Customize the appearance of a DateSpinner control

The DateSpinner control supports most text styles such as `fontSize`, `color`, and `letterSpacing`. In addition, it adds a new style property called `accentColor`. This style changes the color of the current date or time in the spinner lists. The following example sets this color to red:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- datespinner/views/DateSpinnerStyles.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark"
        title="DateSpinner Styles">
    <s:layout>
        <s:VerticalLayout/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import spark.components.calendarClasses.DateSelectorDisplayMode;
        ]]>
    </fx:Script>

    <!-- Acceptable style formats are color_name (e.g., 'red') or
        hex colors (e.g., '0xFF0000') -->
    <s:DateSpinner id="dateSpinner1" accentColor="0xFF0000"
        displayMode="{DateSelectorDisplayMode.DATE}"/>
</s:View>
```

The DateSpinner control does not support the `textAlign` property. Text alignment is set by the control.

To customize other aspects of a DateSpinner control's appearance, you can create a custom skin for the control or modify some of the subcomponents with CSS.

The DateSpinnerSkin class controls the sizing of the DateSpinner control. Each spinner within a DateSpinner control is a SpinnerList object with its own SpinnerListSkin. All spinners in a single DateSpinner control are children of a single SpinnerListContainer, which has its own skin, the SpinnerListContainerSkin.

You can explicitly set the `height` property of a DateSpinner control. If you set the `width` property, the control centers itself in an area that is sized to the requested width.

To modify the settings of the spinners within a DateSpinner control, you can also use the SpinnerList, SpinnerListContainer, and SpinnerListItemRenderer CSS type selectors. For example, the SpinnerList type selector controls the padding properties in the spinners.

The following example changes the padding in the spinners:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- datespinner/DateSpinnerExamples2.mxml -->
<s:ViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    firstView="views.CustomSpinnerListSkinExample">

    <fx:Style>
        @namespace s "library://ns.adobe.com/flex/spark";

        s|SpinnerListItemRenderer {
            paddingTop: 7;
            paddingBottom: 7;
            paddingLeft: 5;
            paddingRight: 5;
        }
    </fx:Style>

</s:ViewNavigatorApplication>
```

In mobile applications, type selectors must be in the top-level application file and not in a child view of the application. If you try to set the SpinnerListItemRenderer type selector in a style block inside a view, Flex throws a compiler warning.

You can extend the SpinnerListContainerSkin class to further customize the appearance of the spinners in a DateSpinner control. The following example applies a custom skin to the SpinnerListContainer:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- datespinner/DateSpinnerExamples3.mxml -->
<s:ViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
                            xmlns:s="library://ns.adobe.com/flex/spark"
                            firstView="views.CustomSpinnerListSkinExample">
    <fx:Style>
        @namespace s "library://ns.adobe.com/flex/spark";

        // Change SpinnerListContainer for all DateSpinner controls
        s|SpinnerListContainer {
            skinClass: ClassReference("customSkins.CustomSpinnerListContainerSkin");
        }

        // Change padding for all DateSpinner controls
        s|SpinnerListItemRenderer {
            paddingTop: 7;
            paddingBottom: 7;
            paddingLeft: 5;
            paddingRight: 5;
            fontSize: 12;
        }
    </fx:Style>

</s:ViewNavigatorApplication>
```

The following CustomSpinnerListContainerSkin class reduces the size of the "selection indicator" so that it more closely reflects the new size of the fonts and padding in the rows of the spinner:

```
// datespinner/customSkins/CustomSpinnerListContainerSkin.as
package customSkins {
    import mx.core.DPIClassification;

    import spark.skins.mobile.SpinnerListContainerSkin;
    import spark.skins.mobile.supportClasses.MobileSkin;
    import spark.skins.mobile160.assets.SpinnerListContainerBackground;
    import spark.skins.mobile160.assets.SpinnerListContainerSelectionIndicator;
    import spark.skins.mobile160.assets.SpinnerListContainerShadow;
    import spark.skins.mobile240.assets.SpinnerListContainerBackground;
    import spark.skins.mobile240.assets.SpinnerListContainerSelectionIndicator;
    import spark.skins.mobile240.assets.SpinnerListContainerShadow;
    import spark.skins.mobile320.assets.SpinnerListContainerBackground;
    import spark.skins.mobile320.assets.SpinnerListContainerSelectionIndicator;
    import spark.skins.mobile320.assets.SpinnerListContainerShadow;

    public class CustomSpinnerListContainerSkin extends SpinnerListContainerSkin
    {
        public function CustomSpinnerListContainerSkin() {
            super();

            switch (applicationDPI)
```

```
            {
                case DPIClassification.DPI_320:
                {
                   borderClass = spark.skins.mobile320.assets.SpinnerListContainerBackground;
                    selectionIndicatorClass =
spark.skins.mobile320.assets.SpinnerListContainerSelectionIndicator;
                    shadowClass = spark.skins.mobile320.assets.SpinnerListContainerShadow;

                    cornerRadius = 10;
                    borderThickness = 2;
                    selectionIndicatorHeight = 80; // was 120
                    break;
                }
                case DPIClassification.DPI_240:
                {
                   borderClass = spark.skins.mobile240.assets.SpinnerListContainerBackground;
                    selectionIndicatorClass =
spark.skins.mobile240.assets.SpinnerListContainerSelectionIndicator;
                    shadowClass = spark.skins.mobile240.assets.SpinnerListContainerShadow;

                    cornerRadius = 8;
                    borderThickness = 1;
                    selectionIndicatorHeight = 60; // was 90
                    break;
                }
                default: // default DPI_160
                {
                   borderClass = spark.skins.mobile160.assets.SpinnerListContainerBackground;
                    selectionIndicatorClass =
spark.skins.mobile160.assets.SpinnerListContainerSelectionIndicator;
                    shadowClass = spark.skins.mobile160.assets.SpinnerListContainerShadow;

                    cornerRadius = 5;
                    borderThickness = 1;
                    selectionIndicatorHeight = 40; // was 60

                    break;
                }
            }
        }
    }
}
```

For more information about skinning mobile components, see “Basics of mobile skinning” on page 137.

Use localized dates and times with a DateSpinner control

The DateSpinner control supports all locales supported by the device on which the application is running. If you set the locale to ja-JP, then the DateSpinner changes to represent dates in the standard of the Japanese locale.

You can set the `locale` property on the DateSpinner control directly, or you can set it on a container, such as the Application. The DateSpinner control inherits the value of this property. The default locale is the locale of the device on which the application is running, unless you override it with the `locale` property.

The following example sets the default locale to “ja-JP”. You can select a locale to change the format of the DateSpinner:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- datespinner/LocalizedDateSpinner.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark"
        title="Localized DateSpinner" locale="ja_JP">
    <s:layout>
        <s:VerticalLayout/>
    </s:layout>
    <fx:Script>
        <![CDATA[
            private function localeChangeHandler():void {
                ds1.setStyle('locale',localeSelector.selectedItem);
            }
        ]]>
    </fx:Script>

    <s:ComboBox id="localeSelector" change="localeChangeHandler()">
        <s:ArrayList>
            <fx:String>en-US</fx:String>
            <fx:String>en-UK</fx:String>
            <fx:String>es-AR</fx:String>
            <fx:String>he-IL</fx:String>
            <fx:String>ko-KR</fx:String>
            <fx:String>ja-JP</fx:String>
            <fx:String>vi-VN</fx:String>
            <fx:String>zh-CN</fx:String>
            <fx:String>zh-TW</fx:String>
        </s:ArrayList>
    </s:ComboBox>
    <s:DateSpinner id="ds1" displayMode="dateAndTime"/>

</s:View>
```

Use a spinner list in a mobile application

The SpinnerList component is a specialized List that is typically used for data selection in mobile applications. By default, as the user scrolls through the list items, the items wrap after the user reaches the end of the list. The SpinnerList control is commonly used as a numeric stepper component in mobile applications.

The following image shows what a typical SpinnerList control looks like in a mobile application:

SpinnerList control

The SpinnerList behaves like a spinning cylindrical drum. Users can spin the list by using upward or downward throws, drag it upward or downward, and click on an item in the list.

If you use more than one SpinnerList control to make a complex set of spinners, you often wrap them in a SpinnerListContainer. This class provides a unified border around the spinners and defines the layout.

The data for a SpinnerList is stored as a list. It is rendered in the spinner with a SpinnerListItemRenderer. You can override the item renderer to customize the appearance or contents of the spinner.

The DateSpinner control uses a set of SpinnerList controls with custom skinning and data definitions.

You cannot currently disable items in a SpinnerList control without disabling the entire control.

Define data for a spinner list

To define data for a SpinnerList control, you can do one of the following:

- Define the data inline in the SpinnerList control's `dataProvider` property
- Define data as child tags of the `<s:SpinnerList>` tag
- Define data in ActionScript and bind it to the SpinnerList control

The SpinnerList control can take any class that implements the IList interface as a data provider. This includes the ArrayCollection, ArrayList, and XMLListCollection classes.

The following example defines data for the SpinnerList control in child tags of the `<s:SpinnerList>` tags:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- mobile_spinnerlist/views/SpinnerListComplexDataProvider.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark"
        title="Complex Data Provider">
    <fx:Declarations>
        <!-- Place non-visual elements (e.g., services, value objects) here -->
    </fx:Declarations>

    <s:layout>
        <s:VerticalLayout paddingTop="10" paddingLeft="10"/>
    </s:layout>

    <s:Label text="Select a person:"/>

    <s:SpinnerListContainer>
        <s:SpinnerList id="peopleList" width="300" labelField="name">
            <s:ArrayCollection>
                <fx:Object name="Friedeman Friese" companyID="14266"/>
                <fx:Object name="Stephen Glenn" companyID="14266"/>
                <fx:Object name="Reiner Knizia" companyID="11233"/>
                <fx:Object name="Alan Moon" companyID="11543"/>
                <fx:Object name="Klaus Teuber" companyID="13455"/>
                <fx:Object name="Dale Yu" companyID="14266"/>
            </s:ArrayCollection>
        </s:SpinnerList>
    </s:SpinnerListContainer>

    <s:Label text="Selected ID: {peopleList.selectedItem.companyID}"/>

</s:View>
```

The following example defines SpinnerList data in the `<s:SpinnerList>` tag:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- mobile_spinnerlist/views/SpinnerListInlineDataProvider.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark"
        title="Inline Data Provider">
    <fx:Declarations>
        <!-- Place non-visual elements (e.g., services, value objects) here -->
    </fx:Declarations>

    <s:layout>
        <s:VerticalLayout paddingTop="10" paddingLeft="10"/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import mx.collections.ArrayCollection;
        ]]>
    </fx:Script>

    <s:SpinnerListContainer>
        <!-- Show how to create data provider inline -->
        <s:SpinnerList id="smallList" dataProvider="{new ArrayCollection([1,5,10,15,30])}"
            wrapElements="false" typicalItem="44"/>
    </s:SpinnerListContainer>

    <s:Label text="Selected Item: {smallList.selectedItem}"/>

</s:View>
```

The following example defines SpinnerList data in ActionScript:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- mobile_spinnerlist/views/SpinnerListBasicDataProvider.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark"
        title="Basic Data Provider"
        creationComplete="initApp()">
    <fx:Declarations>
        <!-- Place non-visual elements (e.g., services, value objects) here -->
    </fx:Declarations>

    <s:layout>
        <s:VerticalLayout paddingTop="10" paddingLeft="10"/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import mx.collections.ArrayCollection;

            [Bindable]
            public var daysOfWeek:ArrayCollection;

            private function initApp():void {
               daysOfWeek = new ArrayCollection(["Mon","Tue","Wed","Thu","Fri","Sat","Sun"]);
            }
        ]]>
    </fx:Script>

    <s:SpinnerListContainer>
        <s:SpinnerList id="daysList" width="200" dataProvider="{daysOfWeek}"/>
    </s:SpinnerListContainer>

    <s:Label text="Selected Day: {daysList.selectedItem}"/>

</s:View>
```

If you have complex objects as data in ActionScript, you specify the `labelField` property so that the SpinnerList displays the right labels, as the following example shows:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- mobile_spinnerlist/views/SpinnerListComplexASDP.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark"
        title="Complex Data Provider in AS" creationComplete="initApp()">
    <fx:Declarations>
        <!-- Place non-visual elements (e.g., services, value objects) here -->
    </fx:Declarations>

    <s:layout>
        <s:VerticalLayout paddingTop="10" paddingLeft="10"/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import mx.collections.ArrayCollection;

            [Bindable]
            private var myAC:ArrayCollection;

            private function initApp():void {
                myAC = new ArrayCollection([
                    {name:"Alan Moon",id:42},
                    {name:"Friedeman Friese",id:44},
                    {name:"Dale Yu",id:45},
                    {name:"Stephen Glenn",id:47},
                    {name:"Reiner Knizia",id:48},
                    {name:"Klaus Teuber",id:49}
                ]);
            }
        ]]>
    </fx:Script>

    <s:SpinnerListContainer>
        <s:SpinnerList id="peopleList" dataProvider="{myAC}" width="300" labelField="name">
        </s:SpinnerList>
    </s:SpinnerListContainer>

    <s:Label text="Selected ID: {peopleList.selectedItem.id}"/>

</s:View>
```

You can also use aconvenience class, NumericDataProvider, to provide numeric data to a SpinnerList control. This lets you easily define a set of numeric data with a minimum, maximum, and step size.

The following example uses the NumericDataProvider class as data sources for the SpinnerList controls:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- mobile_spinnerlist/views/MinMaxSpinnerList.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark"
        title="Min/Max SpinnerLists"
        backgroundColor="0x000000">

    <fx:Script>
        <![CDATA[
            import mx.collections.ArrayCollection;
        ]]>
    </fx:Script>

    <s:SpinnerListContainer top="10" left="10">
        <s:SpinnerList typicalItem="100">
            <s:dataProvider>
                <s:NumericDataProvider minimum="0" maximum="23" stepSize="1"/>
            </s:dataProvider>
        </s:SpinnerList>
        <s:SpinnerList typicalItem="100">
            <s:dataProvider>
                <s:NumericDataProvider minimum="0" maximum="59" stepSize="1"/>
            </s:dataProvider>
        </s:SpinnerList>
        <s:SpinnerList typicalItem="100">
            <s:dataProvider>
                <s:NumericDataProvider minimum="0" maximum="59" stepSize="1"/>
            </s:dataProvider>
        </s:SpinnerList>
        <s:SpinnerList typicalItem="100"
            dataProvider="{new ArrayCollection(['AM','PM'])}"
            wrapElements="false"/>
    </s:SpinnerListContainer>
</s:View>
```

Select items in a spinner list

The SpinnerList control supports selecting a single item at a time only. The selected item is always in the center of the component and by default, is displayed under the selection indicator. When not spinning, the SpinnerList must always have an item selected.

To get the currently selected item in a SpinnerList control, you access the control's `selectedIndex` or `selectedItem` properties.

To set the currently selected item in a SpinnerList control, you set the value of the `selectedIndex` or `selectedItem` properties. You typically set these properties on the `<s:SpinnerList>` tag so that the item is selected when the SpinnerList is created.

If you do not explicitly set the value of the `selectedIndex` or `selectedItem` properties on the SpinnerList control, the default selected item is the first item in the list.

You can use the `selectedIndex` or `selectedItem` properties to programmatically change the selected item in the spinner. The following example uses the SpinnerList control as a countdown timer. The Timer changes the selected item in the spinner by changing the value of the `selectedIndex` property every second:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- mobile_spinnerlist/views/SpinnerListCountdownTimer.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark"
        title="Countdown Timer"
        creationComplete="initApp()">
    <fx:Declarations>
        <!-- Place non-visual elements (e.g., services, value objects) here -->
    </fx:Declarations>
    <fx:Script>
        <![CDATA[
            private var myTimer:Timer;

            private function initApp():void {
                myTimer = new Timer(1000, 0); // 1 second
                myTimer.addEventListener(TimerEvent.TIMER, changeSpinner);
                myTimer.start();
            }
            private function changeSpinner(e:Event):void {
                secList.selectedIndex = secList.selectedIndex - 1;
            }
        ]]>
    </fx:Script>

    <s:SpinnerListContainer left="50" top="50">
        <s:SpinnerList id="secList" width="100" selectedIndex="60">
            <s:dataProvider>
                <s:NumericDataProvider minimum="0" maximum="60" stepSize="1"/>
            </s:dataProvider>
        </s:SpinnerList>
    </s:SpinnerListContainer>
</s:View>
```

User interactions and events with a spinner list

If a user selects an item in a SpinnerList control, typically by touching that item, the control dispatches a `click` event.

Whenever the selected item changes, the SpinnerList control dispatches a `change` event. When the SpinnerList control is spinning, it does not dispatch a `change` event for each item it passes. It only dispatches the event when it comes to rest on a new item.

The SpinnerList control supports common mobile gestures such as `gestureSwipe` and `gestureZoom`.

The following example shows some common events that are dispatched when using the SpinnerList control:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- mobile_spinnerlist/views/SpinnerListEvents.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark"
        title="SpinnerList Events"
        creationComplete="initApp()">
    <s:layout>
        <s:VerticalLayout paddingTop="10" paddingLeft="10"
                          paddingRight="10" paddingBottom="10"/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import mx.collections.ArrayCollection;

            [Bindable]
            public var daysOfWeek:ArrayCollection;

            private function initApp():void {
               daysOfWeek = new ArrayCollection(["Mon","Tue","Wed","Thu","Fri","Sat","Sun"]);
            }

            private function eventHandler(e:Event):void {
            ta1.text += "Event: " + e.type + " (selectedItem: " + e.currentTarget.selectedItem
+ ")\n";
            }
        ]]>
    </fx:Script>

    <s:SpinnerListContainer>
        <s:SpinnerList id="daysList" width="300"
            dataProvider="{daysOfWeek}"
            change="eventHandler(event)"
            gestureSwipe="eventHandler(event)"
            click="eventHandler(event)"
            gestureZoom="eventHandler(event)"
        />
    </s:SpinnerListContainer>
    <s:TextArea id="ta1" width="100%" height="100%"/>
</s:View>
```

The following image shows the output after interacting with the SpinnerList control:

SpinnerList control events

Set wrapping on a spinner list

By default, if the number of items in the spinner list is less than the number of items displayed in the spinner, the spinner does not wrap; it stops at the last item in the list. Otherwise, the spinner wraps to the beginning of the list when the user goes past the last item.

You can override the default wrapping behavior of the SpinnerList control by setting the `wrapElements` property to `true` or `false`. The value of the `wrapElements` property determines whether a SpinnerList control starts again at the first item after the last item in the list is reached. If `wrapElements` is set to `false`, then the spinner stops when it reaches the end of the list. If the `wrapElements` property is set to `true`, then the spinner starts again with the first item.

The following example lets you toggle the value of the `wrapElements` property:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- mobile_spinnerlist/views/SpinnerListWrapElements.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark"
        title="Wrap Elements">
    <s:layout>
        <s:VerticalLayout paddingTop="10" paddingLeft="10"/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import mx.collections.ArrayCollection;
        ]]>
    </fx:Script>

    <s:SpinnerListContainer>
        <s:SpinnerList id="smallList"
            dataProvider="{new ArrayCollection([1,5,6,10,15,30])}"
            wrapElements="{cb1.selected}"/>
    </s:SpinnerListContainer>
    <!-- By default, cause the elements to be wrapped by setting this to true -->
    <s:CheckBox id="cb1" label="Wrap Elements" selected="true"/>
</s:View>
```

In general, users expect the list to wrap if there are more items in the list than the list displays at one time. If there are fewer items in the list than are capable of being displayed, then users typically expect the list to not wrap.

Change appearance of a spinner list

The SpinnerList control supports all the text styles common to the Spark mobile theme. This includes the `fontSize`, `fontWeight`, `color`, `textDecoration`, and alignment properties.

You can also define the padding properties of a SpinnerList by modifying the SpinnerListItemRenderer style properties.

The following example sets text-related style properties on the SpinnerList type selector and padding properties on the SpinnerListItemRenderer type selector:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- mobile_spinnerlist/SpinnerListExamples2.mxml -->
<s:ViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
                            xmlns:s="library://ns.adobe.com/flex/spark"
                            firstView="views.SpinnerListStyles">
    <fx:Declarations>
        <!-- Place non-visual elements (e.g., services, value objects) here -->
    </fx:Declarations>

    <fx:Style>
        @namespace s "library://ns.adobe.com/flex/spark";
        s|SpinnerList {
            textAlign: right;
            fontSize: 13;
            fontWeight: bold;
            color: red;
        }
        s|SpinnerListItemRenderer {
            paddingTop: 5;
            paddingBottom: 5;
            paddingRight: 5;
        }
    </fx:Style>

</s:ViewNavigatorApplication>
```

Note that in a mobile application, you must define the `<fx:Style>` block at the top-level application file if you use type selectors. Otherwise, the compiler will throw a warning and the styles will not be applied.

The SpinnerList control does not support the `accentColor` or `chromeColor` style properties.

Skin a spinner list

You can create a custom skin for a SpinnerList control or for the SpinnerListContainer. To do this, you typically copy the source of the SpinnerListSkin or SpinnerListContainerSkin as a basis for your custom skin class.

You typically create custom SpinnerList skins to modify the following aspects of a SpinnerList control or its container:

- Change the size or shape of the box around the currently-selected item (`selectionIndicator`). This is done by creating a custom SpinnerListContainerSkin class.
- Define the height of each row (`rowHeight`). This is done by creating a custom SpinnerListSkin class.
- Define the number of rows displayed (`requestedRowCount`). This is done by creating a custom SpinnerListSkin class.
- Define the appearance of the container (such as the corner radius and border thickness). This is done by creating a custom SpinnerListContainerSkin class.

For an example of a custom SpinnerListSkin and SpinnerListContainerSkin, see "Customize the appearance of a DateSpinner control" on page 95.

Embed images in a spinner list

You can use images in a SpinnerList control instead of text labels by defining an IconItemRenderer as the item renderer for the SpinnerList.

You must use embedded images in an IconItemRenderer object. You cannot use images that are loaded at runtime in an IconItemRenderer object.

The following example uses embedded images in a SpinnerList control:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- mobile_spinnerlist/views/SpinnerListEmbeddedImage.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark"
        title="Embedded Images">

    <s:layout>
        <s:VerticalLayout paddingTop="10" paddingLeft="10"/>
    </s:layout>
    <fx:Script>
        <![CDATA[
            import mx.collections.ArrayList;
            [Embed(source="../assets/product_icons/flex_50x50.gif")]
            [Bindable]
            public var icon0:Class;
            [Embed(source="../assets/product_icons/acrobat_reader_50x50.gif")]
            [Bindable]
            public var icon1:Class;
            [Embed(source="../assets/product_icons/coldfusion_50x50.gif")]
            [Bindable]
            public var icon2:Class;
            [Embed(source="../assets/product_icons/flash_50x50.gif")]
            [Bindable]
            public var icon3:Class;
            [Embed(source="../assets/product_icons/flash_player_50x50.gif")]
            [Bindable]
            public var icon4:Class;
            [Embed(source="../assets/product_icons/photoshop_50x50.gif")]
            [Bindable]
            public var icon5:Class;

            // Return an ArrayList of icons for each spinner
            private function getIconList():ArrayList {
                var a:ArrayList = new ArrayList();
                a.addItem({icon:icon0});
                a.addItem({icon:icon1});
                a.addItem({icon:icon2});
                a.addItem({icon:icon3});
                a.addItem({icon:icon4});
                a.addItem({icon:icon5});
                return a;
            }
        ]]>
    </fx:Script>

    <s:SpinnerListContainer>
        <s:SpinnerList id="productList1" width="90" dataProvider="{getIconList()}"
selectedIndex="0">
            <s:itemRenderer>
                <fx:Component>
                    <s:IconItemRenderer labelField="" iconField="icon"/>
                </fx:Component>
```

```
            </s:itemRenderer>
        </s:SpinnerList>
        <s:SpinnerList id="productList2" width="90" dataProvider="{getIconList()}"
selectedIndex="2">
            <s:itemRenderer>
                <fx:Component>
                    <s:IconItemRenderer labelField="" iconField="icon"/>
                </fx:Component>
            </s:itemRenderer>
        </s:SpinnerList>
        <s:SpinnerList id="productList3" width="90" dataProvider="{getIconList()}"
selectedIndex="1">
            <s:itemRenderer>
                <fx:Component>
                    <s:IconItemRenderer labelField="" iconField="icon"/>
                </fx:Component>
            </s:itemRenderer>
        </s:SpinnerList>
    </s:SpinnerListContainer>
</s:View>
```

The following image shows how this application would appear on a mobile device:

SpinnerList control with embedded images

Chapter 4: Application design and workflow

Enable persistence in a mobile application

An application for a mobile device is often interrupted by other actions, such as a text message, a phone call, or other mobile applications. Typically, when an interrupted application is relaunched, the user expects the previous state of the application to be restored. The persistence mechanism allows the device to restore the application to its previous state.

The Flex framework provides two kinds of persistence for mobile application. *In-memory* persistence saves view data as the user navigates the application. *Session persistence* restores data if the user quits the application and then restarts it. Session persistence is important in mobile applications because a mobile operating system can quit applications at any time (for example, when memory is low).

Blogger Steve Mathews created a cookbook entry on simple data persistence in a Flex 4.5 mobile application.

Blogger Holly Schinsky blogged about persistence and data handling in Flex 4.5 Mobile Data Handling.

In-memory persistence

View containers support in-memory persistence by using the `View.data` property. An existing view's `data` property is automatically saved when the selected section changes or when a new view is pushed onto the ViewNavigator stack, causing the existing view to be destroyed. The `data` property of the view is restored when control returns to the view and the view is re-instantiated and activated. Therefore, in-memory persistence lets you maintain state information of a view at runtime.

Session persistence

Session persistence maintains application state information between application executions. The ViewNavigatorApplication and TabbedViewNavigatorApplication containers define the `persistNavigatorState` property to implement session persistence. Set `persistNavigatorState` to `true` to enable session persistence. By default, `persistNavigatorState` is `false`.

When enabled, session persistence writes the state of the application to disk using a local shared object named `FxAppCache`. Your application can also use methods of the spark.managers.PersistenceManager to write additional information to the local shared object.

ViewNavigator session persistence

The ViewNavigator container supports session persistence by saving the state of its view stack to disk when the application quits. This save includes the `data` property of the current View.

When the application restarts, the stack of the ViewNavigator is reinitialized and the user sees the same view and content visible when the application quit. Because the stack contains a copy of the `data` property for each view, previous views on the stack can be recreated as they become active.

TabbedViewNavigator session persistence

For the TabbedViewNavigator container, session persistence saves the currently selected tab of the tab bar when the application quits. The tab corresponds to the ViewNavigator and view stack that defines the tab. Included in the save is the `data` property of the current View. Therefore, when the application restarts, the active tab and associated ViewNavigator is set to the state that it had when the application quit.

Note: *For an application defined by the TabbedViewNavigatorApplication container, only the stack for the current ViewNavigator is saved. Therefore, when the application restarts, only the state of the current ViewNavigator is restored.*

Session persistence data representation

The persistence mechanism used by Flex is not encrypted or protected. Therefore, persisted data is stored in a format that can be interpreted by another program or user. Do not persist sensitive information, such as user credentials, using this mechanism. You have the option of writing your own persistence manager that provides better protection. For more information, see "Customize the persistence mechanism" on page 114.

Use session persistence

The following example sets the `persistNavigatorState` property to `true` for an application to enable session persistence:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\SparkSingleSectionPersist.mxml -->
<s:ViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    firstView="views.EmployeeMainView"
    persistNavigatorState="true">

    <fx:Script>
        <![CDATA[
            protected function button1_clickHandler(event:MouseEvent):void {
                // Switch to the first view in the section.
                navigator.popToFirstView();
            }
        ]]>
    </fx:Script>

    <s:navigationContent>
        <s:Button icon="@Embed(source='assets/Home.png')"
                  click="button1_clickHandler(event)"/>
    </s:navigationContent>
</s:ViewNavigatorApplication>
```

This application uses EmployeeMainView.mxml as its first view. EmployeeMainView.mxml defines a List control that lets you select a user name:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\views\EmployeeMainView.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    title="Employees">
    <s:layout>
        <s:VerticalLayout paddingTop="10"/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import spark.events.IndexChangeEvent;
            protected function myList_changeHandler(event:IndexChangeEvent):void {
                navigator.pushView(views.EmployeeView,myList.selectedItem);
            }
        ]]>
    </fx:Script>

    <s:Label text="Select an employee name"/>
    <s:List id="myList"
        width="100%" height="100%"
        labelField="firstName"
        change="myList_changeHandler(event)">
        <s:ArrayCollection>
            <fx:Object firstName="Bill" lastName="Smith" companyID="11233"/>
            <fx:Object firstName="Dave" lastName="Jones" companyID="13455"/>
            <fx:Object firstName="Mary" lastName="Davis" companyID="11543"/>
            <fx:Object firstName="Debbie" lastName="Cooper" companyID="14266"/>
        </s:ArrayCollection>
    </s:List>
</s:View>
```

To see session persistence, open the application, and then select “Dave” in the List control to navigate to the EmployeeView.mxml view:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\views\EmployeeView.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    title="Employee View">
    <s:layout>
        <s:VerticalLayout paddingTop="10"/>
    </s:layout>

    <s:VGroup>
        <s:Label text="{data.firstName}"/>
        <s:Label text="{data.lastName}"/>
        <s:Label text="{data.companyID}"/>
    </s:VGroup>
</s:View>
```

The EmployeeView.mxml view displays the data about “Dave”. Then, quit the application. When you restart the application, you again see the EmployeeView.mxml view displaying the same data as when you quit the application.

Access data in a local shared object

Information in a local shared object is saved as a key:value pair. The methods of the PeristenceManager, such as `setPropery()` and `getProperty()`, rely on the key to access the associated value in the local shared object.

You can use the `setProperty()` method to write your own key:value pairs to the local shared object. The `setProperty()` method has the following signature:

```
setProperty(key:String, value:Object):void
```

Use the `getProperty()` method to access the value for a specific key. The `getProperty()` method has the following signature:

```
getProperty(key:String):Object
```

When the `persistNavigatorState` property is `true`, the persistence manager automatically saves two key:value pairs to the local shared object when the application quits:

- `applicationVersion`

  The version of the application as described by the application.xml file.

- `navigatorState`

  The view state of the navigator, corresponding to the stack of the current ViewNavigator.

Perform manual persistence

When the `persistNavigatorState` property is `true`, Flex automatically performs session persistence. You can still persist application data when the `persistNavigatorState` property is `false`. In that situation, implement your own persistence mechanism by using methods of the PeristenceManager.

Use the `setProperty()` and `getProperty()` methods to write and read infomration in the local shared object. Call the `load()` method to initialize the PeristenceManager. Call the `save()` methods to write any data to disk.

Note: *When the `persistNavigatorState` property is `false`, Flex does not automatically save the view stack of the current ViewNavigator when the aplication quits, or restore it when the application starts.*

Handle persistence events

You can use the following events of the mobile application containers to develop a custom persistence mechanism:

- `navigatorStateSaving`
- `navigatorStateLoading`

You can cancel the saving of an applications state to disk by calling the `preventDefault()` method in the handler for the `navigatorStateSaving` event. Cancel application loading on restart by calling the `preventDefault()` method in the handler for the `navigatorStateLoading` event.

Customize the persistence mechanism

When session persistence is enabled, the application opens to the view that was displayed when the application quit. You must store enough information in the view's `data` property, or elsewhere such as in a shared object, to be able to completely restore the application state.

For example, the restored view might have to perform calculations based on the view's `data` property. Your application must then recognize when the application restarts, and perform the necessary calcualtions. One option is to override the `serializeData()` and `deserializePersistedData()` methods of the View to perform your own actions when the application quits or restarts.

Built-in data type support for session persistence

The persistence mechanism automatically supports all built-in data types, including: Number, String, Array, Vector, Object, uint, int, and Boolean. These data types are automatically saved by the persistence mechanism.

Custom class support for session persistence

Many applications use custom classes to define data. If a custom class contains properties defined by the built-in data types, the persistence mechanism can automatically save and load the class. However, you must first register the class with the persistence mechanism by calling the flash.net.registerClassAlias() method. Typically you call this method in the `preinitialize` event of the application, before the persistence storage is initialized or any data is saved to it.

If you define a complex class, one that uses data types other than the built-in data types, you must convert that data to a supported type, such as a String. Also, if the class defines any private variables, they are not automatically persisted. To support the complex class in the persistence mechanism, the class must implement the flash.utils.IExternalizable interface. This interface requires that the class implements the `writeExternal()` and `readExternal()` methods to save and restore an instance of the class.

Support multiple screen sizes and DPI values in a mobile application

Guidelines for supporting multiple screen sizes and DPI values

To develop an application that is platform independent, be aware of different output devices. Devices can have different screen sizes or resolutions and different DPI values, or densities.

Flex engineer Jason SJ describes two approaches to creating resolution-independent mobile applications on his blog.

Terminology

Resolution is the number of pixels high by the number of pixels wide: that is, the total number of pixels that a device supports.

DPI is the number of dots per square inch: that is, the density of pixels on a device's screen. The term DPI is used interchangeably with PPI (pixels per inch).

Flex support for DPIs

The following flex features simplify the process of producing resolution- and DPI-independent applications:

Skins DPI-aware skins for mobile components. The default mobile skins do not need additional coding to scale well for most devices' resolutions.

applicationDPI A property that defines the size for which your custom skins are designed. Suppose that you set this property at some DPI value, and a user runs the application on a device with a different DPI value. Flex scales everything in the application to the DPI of the device in use.

The default mobile skins are DPI-independent, both with and without DPI scaling. As a result, if you do not use components with static sizes or custom skins, you typically do not need to set the `applicationDPI` property.

Dynamic layouts

Dynamic layouts help you overcome differences in resolution. For example, setting a control's width to 100% always fills the width of the screen, whether the resolution is 480x854 or 480x800.

Set applicationDPI property

When you create density-independent applications, you can set the target DPI on the root application tag. (For mobile applications, the root tag is `<s:ViewNavigatorApplication>`, `<s:TabbedViewNavigatorApplication>`, or `<s:Application>`.)

You set the value of the `applicationDPI` property to 160, 240, or 320, depending on the approximate resolution of your target device. For example:

```
<s:ViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    firstView="views.DensityView1"
    applicationDPI="320">
```

When you set the `applicationDPI` property, you effectively define a scale for the application when it is compared to the target device's actual resolution (the `runtimeDPI`) at runtime. For example, if you set the `applicationDPI` property to 160 and the target device has a `runtimeDPI` of 160, the scale factor is 1 (no scaling). If you set the `applicationDPI` property to 240, the scale factor is 1.5 (Flex magnifies everything by 150%). At 320, the scale factor is 2, so Flex magnifies everything by 200%.

In some cases, non-integer scaling can result in undesirable artifacts due to interpolation, such as blurred lines.

Disable DPI scaling

To disable DPI scaling for the application, do not set the value of the `applicationDPI` property.

Understand applicationDPI and runtimeDPI

The following table describes two properties of the Application class that are integral to working with applications at different resolutions:

Property	Description
`applicationDPI`	The target density or DPI of the application. When you specify a value for this property, Flex applies a scale factor to the root application. The result is an application designed for one DPI value scales to look good on another device with a different DPI value. The scale factor is calculated by comparing the value of this property with the `runtimeDPI` property. This scale factor is applied to the entire application, including the preloader, pop-ups, and all components on the stage. When not specified, this property returns the same value as the `runtimeDPI` property. This property cannot be set in ActionScript; it can only be set in MXML. You cannot change the value of this property at runtime.
`runtimeDPI`	The density or DPI value of the device that the application is currently running on. Returns the value of the `Capabilities.screenDPI` property, rounded to one of the constants defined by the DPIClassification class. This property is read-only.

Create resolution- and DPI-independent applications

Resolution- and DPI-independent applications have the following characteristics:

Images Vector images scale smoothly to match the target device's actual resolution. Bitmaps, on the other hand, do not always scale as well. In these cases, you can load bitmaps at different resolutions, depending on the device resolution by using the MultiDPIBitmapSource class.

Text The font size of text (not the text itself) is scaled to match the resolution.

Layouts Use dynamic layouts to ensure that the application looks good when scaled. In general, avoid using constraint-based layouts where you specify pixel boundaries with absolute values. If you do use constraints, use the value of the `applicationDPI` property to account for scaling.

Scaling Do not use the `scaleX` and `scaleY` properties on the Application object. When you set the `applicationDPI` property, Flex does the scaling for you.

Styles You can use stylesheets to customize style properties for the target device's OS and the application DPI settings.

Skins The Flex skins in the mobile theme use the application DPI value to determine which assets to use at runtime. All visual skin assets defined by FXG files are suited to the target device.

Application size Do not explicitly set the height and width of the application. Also, when calculating sizes of custom components or popups, do not use the `stageWidth` and `stageHeight` properties. Instead, use the `SystemManager.screen` property.

Determine runtime DPI

When your application starts, your application gets the value of the `runtimeDPI` property from the `Capabilities.screenDPI` Flash Player property. This property is mapped to one of the constants defined by the DPIClassification class. For example, a Droid running at 232 DPI is mapped to the 240 runtime DPI value. Device DPI values do not always exactly match the DPIClassification constants (160, 240, or 320). Instead, they are mapped to those classifications, based on a range of target values.

The mappings are as follows:

DPIClassification constant	160 DPI	240 DPI	320 DPI
Actual device DPI	<200	>=200 and <280	>=280

You can customize these mappings to override the default behavior or to adjust devices that report their own DPI value incorrectly. For more information, see "Override the default DPI" on page 126.

Choose autoscaling or non-autoscaling

Choosing to use autoscaling (by setting the value of the `applicationDPI` property) is a tradeoff between convenience and pixel-accurate visual fidelity. If you set the `applicationDPI` property to scale your application automatically, Flex uses skins targeted at the `applicationDPI`. Flex scales the skins up or down to fit the device's actual density. Other assets in your application and layout positions are scaled as well.

If you want to use autoscaling, and you are creating your own skins or assets targeted at a single DPI value, you typically do the following:

- Create a single set of skins and view/component layouts that are targeted at the `applicationDPI` you specify.
- Create multiple versions of any bitmap asset used in your skins or elsewhere in your application, and specify them using the MultiDPIBitmapSource class. Vector assets and text in your skins do not need to be density-aware if you are autoscaling.
- Don't use the `@media` rule in your stylesheets, because your application only considers a single target DPI value.
- Test your application on devices of different densities to ensure that the appearance of the scaled application is acceptable on each device. In particular, check devices that cause scaling by a non-integer factor. For example, if `applicationDPI` is 160, test your application on 240-DPI devices.

If you choose not to use autoscaling (by leaving the `applicationDPI` property unset), get the `applicationDPI` value. Use this property to determine the actual DPI classification of the device, and adapt your application at runtime by doing the following:

- Make multiple sets of skins and layouts targeted at each runtime DPI classification, or make a single set of skins and layouts that dynamically adapts to different densities. (The built-in Flex skins take the latter approach—each skin class checks the `applicationDPI` property and sets itself up appropriately.)
- Use `@media` rules in your stylesheets to filter CSS rules based on the device's DPI classification. Typically, you customize font sizes and padding values for each DPI value.
- Test your application on devices of different densities to ensure that your skins and layouts are properly adapting.

Select styles based on DPI

Flex includes support for applying styles based on the target OS and application DPI value in CSS. You apply styles with the `@media` rule in your stylesheet. The `@media` rule is part of the CSS specification; Flex extends this rule to include additional properties: `application-dpi` and `os-platform`. You use these properties to apply styles selectively based on the application DPI and the platform on which the application is running.

The following example sets the Spark Button control's default `fontSize` style property to 12. If the device uses 240 DPI and is running on the Android operating system, the `fontSize` property is 10.

```
<?xml version="1.0" encoding="utf-8"?>
<!-- mobile_skins/MediaQueryValuesMain.mxml -->
<s:ViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
     xmlns:s="library://ns.adobe.com/flex/spark" applicationDPI="320">

    <fx:Style>
        @namespace s "library://ns.adobe.com/flex/spark";
        @namespace mx "library://ns.adobe.com/flex/mx";
        s|Button {
            fontSize: 12;
        }
        @media (os-platform: "Android") and (application-dpi: 240) {
            s|Button {
                fontSize: 10;
            }
        }
    </fx:Style>

</s:ViewNavigatorApplication>
```

Values for application-dpi property

The `application-dpi` CSS property is compared against the value of the `applicationDPI` style property that is set on the root application. The following are valid values for the `application-dpi` CSS property:

- `160`
- `240`
- `320`

Each of the supported values for `application-dpi` has a corresponding constant in the DPIClassification class.

Values for the os-platform property

The `os-platform` CSS property is matched to the value of the `flash.system.Capabilities.version` property of Flash Player. The following are valid values for the `os-platform` CSS property:

- `Android`
- `iOS`
- `Macintosh`
- `Linux`
- `QNX`
- `Windows`

The matching is not case sensitive.

If none of the entries match, then Flex seeks a secondary match by comparing the first three characters to the list of supported platforms.

Defaults for application-dpi and os-platform properties

If you do not explicitly define an expression containing the `application-dpi` or `os-platform` properties, then all expressions are assumed to match.

Operators in the @media rule

The `@media` rule supports the common operators "and" and "not". It also supports comma-separated lists. Separating expressions by a comma implies an "or" condition.

When you use the "not" operator, the "not" must be the first keyword in the expression. This operator negates the entire expression, not just the property that follows the "not". Because of bug SDK-29191, the "not" operator must be followed by a media type, such as "all", before one or more expressions.

The following example shows how to use some of these common operators:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- mobile_skins/MediaQueryValuesMain.mxml -->
<s:ViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
     xmlns:s="library://ns.adobe.com/flex/spark" applicationDPI="320">

    <fx:Style>
        @namespace s "library://ns.adobe.com/flex/spark";
        @namespace mx "library://ns.adobe.com/flex/mx";
        /* Every os-platform @ 160dpi */
        @media (application-dpi: 160) {
            s|Button {
                fontSize: 10;
            }
        }
        /* IOS only @ 240dpi */
        @media (application-dpi: 240) and (os-platform: "IOS") {
            s|Button {
                fontSize: 11;
            }
        }
        /* IOS at 160dpi or Android @ 160dpi */
        @media (os-platform: "IOS") and (application-dpi:160), (os-platform: "ANDROID") and
```

```
(application-dpi: 160) {
            s|Button {
                fontSize: 13;
            }
        }
        /* Every os-platform except Android @ 240dpi */
        @media not all and (application-dpi: 240) and (os-platform: "Android") {
            s|Button {
                fontSize: 12;
            }
        }
        /* Every os-platform except IOS @ any DPI */
        @media not all and (os-platform: "IOS") {
            s|Button {
                fontSize: 14;
            }
        }
    </fx:Style>

</s:ViewNavigatorApplication>
```

Select bitmap assets based on DPI

Bitmap image assets typically only render optimally at the resolution for which they are designed. This limitation can present challenges when you design applications for multiple resolutions. The solution is to create multiple bitmaps, each at a different resolution, and load the appropriate one depending on the value of the application's `runtimeDPI` property.

The Spark BitmapImage and Image components have a `source` property of type Object. Because of this property, you can pass a class that defines which assets to use. In this case, you pass the MultiDPIBitmapSource class to map different sources, depending on the value of the `runtimeDPI` property.

The following example loads a different image, depending on the DPI:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- mobile_skins/views/MultiSourceView3.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark"
        title="Image with MultiDPIBitmapSource">
    <s:layout>
        <s:VerticalLayout/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import mx.core.FlexGlobals;

            private function doSomething():void {
                /* The MultiDPIBitmapSource's source data. */
                myTA.text =
myImage.source.getSource(FlexGlobals.topLevelApplication.applicationDPI).toString();
            }


        ]]>
    </fx:Script>
    <s:Image id="myImage">
        <s:source>
            <s:MultiDPIBitmapSource
                    source160dpi="assets/low-res/bulldog.jpg"
                    source240dpi="assets/med-res/bulldog.jpg"
                    source320dpi="assets/high-res/bulldog.jpg"/>
        </s:source>
    </s:Image>
    <s:Button id="myButton" label="Click Me" click="doSomething()"/>
    <s:TextArea id="myTA" width="100%"/>
</s:View>
```

When you use the BitmapImage and Image classes with MultiDPIBitmapSource in a *desktop* application, the `source160dpi` property is used for the source.

The Button control's `icon` property also takes a class as an argument. As a result, you can also use a MultiDPIBitmapSource object as the source for the Button's icon. You can define the source of the icon inline, as the following example shows:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- mobile_skins/views/MultiSourceView2.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark" title="Icons Inline">
    <s:layout>
        <s:VerticalLayout/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import mx.core.FlexGlobals;

            private function doSomething():void {
                /* The MultiDPIBitmapSource's source data. */
                myTA.text =
dogButton.getStyle("icon").getSource(FlexGlobals.topLevelApplication.applicationDPI).toStrin
g();
            }
        ]]>
    </fx:Script>
    <s:Button id="dogButton" click="doSomething()">
        <s:icon>
            <s:MultiDPIBitmapSource id="dogIcons"
                    source160dpi="@Embed('../../assets/low-res/bulldog.jpg')"
                    source240dpi="@Embed('../../assets/med-res/bulldog.jpg')"
                    source320dpi="@Embed('../../assets/high-res/bulldog.jpg')"/>
        </s:icon>
    </s:Button>
    <s:TextArea id="myTA" width="100%"/>
</s:View>
```

You can also define icons by declaring them in a `<fx:Declarations>` block and assigning the source with data binding, as the following example shows:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- mobile_skins/views/MultiSourceView1.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:mx="library://ns.adobe.com/flex/mx"
        xmlns:s="library://ns.adobe.com/flex/spark"
        title="Icons in Declarations">
    <fx:Declarations>
        <s:MultiDPIBitmapSource id="dogIcons"
                source160dpi="@Embed('../../assets/low-res/bulldog.jpg')"
                source240dpi="@Embed('../../assets/med-res/bulldog.jpg')"
                source320dpi="@Embed('../../assets/high-res/bulldog.jpg')"/>
    </fx:Declarations>
    <s:layout>
        <s:VerticalLayout/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import mx.core.FlexGlobals;

            private function doSomething():void {
                /* The MultiDPIBitmapSource's source data. */
                myTA.text =
dogIcons.getSource(FlexGlobals.topLevelApplication.applicationDPI).toString();
            }
        ]]>
    </fx:Script>
    <s:Button id="dogButton" icon="{dogIcons}" click="doSomething()"/>
    <s:TextArea id="myTA" width="100%"/>
</s:View>
```

If the `runtimeDPI` property maps to a `source`*`XXX`*`dpi` property that is `null` or an empty string (""), Flash Player uses the next higher density property as the source. If that value is also `null` or empty, the next lower density is used. If that value is *also* `null` or empty, Flex assigns `null` as the source, and no image is displayed. In other words, you cannot explicitly specify that no image should be displayed for a particular DPI.

Select skin assets based on DPI

Logic in the default mobile skins' constructors chooses assets based on the value of the `applicationDPI` property. These classes select assets that most closely match the target DPI value. When you design custom skins that work both with and without DPI scaling, use the `applicationDPI` property and not the `runtimeDPI` property.

For example, the spark.skins.mobile.ButtonSkin class uses a switch/case statement that selects FXG assets that are designed for particular DPI values, similar to the following:

```
switch (applicationDPI) {
    case DPIClassification.DPI_320: {
        upBorderSkin = spark.skins.mobile320.assets.Button_up;
        downBorderSkin = spark.skins.mobile320.assets.Button_down;
        ...
        break;
    }
    case DPIClassification.DPI_240: {
        upBorderSkin = spark.skins.mobile240.assets.Button_up;
        downBorderSkin = spark.skins.mobile240.assets.Button_down;
        ...
        break;
    }
}
```

In addition to conditionally selecting FXG assets, the mobile skin classes also set the values of other style properties such as layout gap and layout padding. These settings are based on the DPI of the target device.

Not setting applicationDPI

If you do not set the `applicationDPI` property, then skins default to using the `runtimeDPI` property. This mechanism guarantees that a skin that bases its values on the `applicationDPI` property rather than on the `runtimeDPI` property uses the appropriate resource both with and without DPI scaling.

When creating custom skins, you can choose to ignore the `applicationDPI` setting. The result is a skin that is still scaled to match the DPI of the target device, but it might not appear optimally if its assets are not specifically designed for that DPI value.

Use applicationDPI in CSS

Use the value of the `applicationDPI` property in the CSS `@media` selector to customize the styles used by your mobile or tablet application without creating custom skins. For more information, see "Select styles based on DPI" on page 118.

Manually determine scale factor and current DPI

To manually instruct a mobile or tablet application to select assets based on the target device's DPI value, you can calculate the scaling factor at runtime. You do this by dividing the value of the `runtimeDPI` property by the `applicationDPI` style property:

```
import mx.core.FlexGlobals;
var curDensity:Number = FlexGlobals.topLevelApplication.runtimeDPI;
var curAppDPI:Number = FlexGlobals.topLevelApplication.applicationDPI;
var currentScalingFactor:Number = curDensity / curAppDPI;
```

You can use the calculated scaling factor to manually select assets. The following example defines custom locations of bitmap assets for each DPI value. It then loads an image from that custom location:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- mobile_skins/DensityMain.mxml -->
<s:ViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
     xmlns:s="library://ns.adobe.com/flex/spark"
     firstView="views.DensityView1"
     applicationDPI="240" initialize="initApp()">

    <fx:Script>
        <![CDATA[
                [Bindable]
                public var densityDependentDir:String;
                [Bindable]
                public var curDensity:Number;
                [Bindable]
                public var appDPI:Number;
                [Bindable]
                public var curScaleFactor:Number;

                public function initApp():void {
                    curDensity = runtimeDPI;
                    appDPI = applicationDPI;
                    curScaleFactor  =  appDPI / curDensity;
                    switch (curScaleFactor) {
                        case 1: {
                            densityDependentDir = "../../assets/low-res/";
                            break;
                        }
                        case 1.5: {
                            densityDependentDir = "../../assets/med-res/";
                            break;
                        }
                        case 2: {
                            densityDependentDir = "../../assets/high-res/";
                            break;
                        }
                    }
                }
        ]]>
    </fx:Script>

</s:ViewNavigatorApplication>
```

The view that uses the scaling factor is as follows:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- mobile_skins/views/DensityView1.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark"
        title="Home"
        creationComplete="initView()">
    <s:layout>
        <s:VerticalLayout/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import mx.core.FlexGlobals;
            [Bindable]
            public var imagePath:String;
            private function initView():void {
                label0.text = "App DPI:" + FlexGlobals.topLevelApplication.appDPI;
                label1.text = "Cur Density:" + FlexGlobals.topLevelApplication.curDensity;
          label2.text = "Scale Factor:" + FlexGlobals.topLevelApplication.curScaleFactor;
             imagePath = FlexGlobals.topLevelApplication.densityDependentDir + "bulldog.jpg";

                ta1.text = myImage.source.toString();
            }
        ]]>
    </fx:Script>

    <s:Image id="myImage" source="{imagePath}"/>
    <s:Label id="label0"/>
    <s:Label id="label1"/>
    <s:Label id="label2"/>
    <s:TextArea id="ta1" width="100%"/>
</s:View>
```

Override the default DPI

After setting the application DPI value, your application is scaled based on the DPI value reported by the device on which it is running. In some cases, devices report incorrect DPI values, or you want to override the default DPI selection method in favor of a custom scaling method.

You can override the default scaling behavior of an application by overriding the default DPI mappings. For example, if a device incorrectly reports that it is 240 DPI instead of 160 DPI, you can create a custom mapping that looks for this device and classifies it as 160 DPI.

To override a particular device's DPI value, you point the Application class's `runtimeDPIProvider` property to a subclass of the RuntimeDPIProvider class. In your subclass, you override the `runtimeDPI` getter and add logic that provides a custom DPI mapping. Do not add dependencies to other classes in the framework such as UIComponent. This subclass can only call into Player APIs.

The following example sets a custom DPI mapping for a device whose `Capabilities.os` property matches "Mac 10.6.5":

```
package {
import flash.system.Capabilities;
import mx.core.DPIClassification;
import mx.core.RuntimeDPIProvider;
public class DPITestClass extends RuntimeDPIProvider {
    public function DPITestClass() {
    }

    override public function get runtimeDPI():Number {
        // Arbitrary mapping for Mac OS.
        if (Capabilities.os == "Mac OS 10.6.5")
            return DPIClassification.DPI_320;

        if (Capabilities.screenDPI < 200)
            return DPIClassification.DPI_160;

        if (Capabilities.screenDPI <= 280)
            return DPIClassification.DPI_240;

        return DPIClassification.DPI_320;
    }
}
}
```

The following application uses the DPITestClass to determine a runtime DPI value to use for scaling. It points to the ViewNavigatorApplication class's `runtimeDPIProvider` property:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- mobile_skins/DPIMappingOverrideMain.mxml -->
<s:ViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
     xmlns:s="library://ns.adobe.com/flex/spark"
     firstView="views.DPIMappingView"
     applicationDPI="160"
     runtimeDPIProvider="DPITestClass">

</s:ViewNavigatorApplication>
```

The following is another example of a subclass of the RuntimeDPIProvider class. In this case, the custom class checks the device's x and y resolution to determine if the device is incorrectly reporting its DPI value:

```
package
{
import flash.system.Capabilities;
import mx.core.DPIClassification;
import mx.core.RuntimeDPIProvider;
public class SpecialCaseMapping extends RuntimeDPIProvider {
    public function SpecialCaseMapping() {
    }

    override public function get runtimeDPI():Number {
        /* A tablet reporting an incorrect DPI of 240. We could use
            Capabilities.manufacturer to check the tablet's OS as well. */
        if (Capabilities.screenDPI == 240 &&
            Capabilities.screenResolutionY == 1024 &&
            Capabilities.screenResolutionX == 600) {
            return DPIClassification.DPI_160;
        }

        if (Capabilities.screenDPI < 200)
            return DPIClassification.DPI_160;

        if (Capabilities.screenDPI <= 280)
            return DPIClassification.DPI_240;

        return DPIClassification.DPI_320;
    }
}
}
```

Chapter 5: Text

Use text in a mobile application

Guidelines for text in a mobile application

Some Spark text controls have been optimized for use in mobile applications. When possible, use the following text controls:

- Spark TextArea
- Spark TextInput
- Spark Label (unless you must use an embedded font; then use the Spark TextArea or TextInput controls)

There are some special considerations when working with text controls in an iOS application. Flex engineer Jason SJ describes these on his blog.

TLF in a mobile application

In general, avoid text controls that use Text Layout Framework (TLF) in mobile applications. The mobile skins of the TextArea and TextInput controls are optimized for mobile applications and do not use TLF as their desktop counterparts do. TLF is used in desktop applications for providing a rich set of controls over text rendering.

Avoid the following text controls in a mobile application, because they use TLF and their skins are not optimized for mobile applications:

- Spark RichText
- Spark RichEditableText

Skins for mobile text controls

When you create a mobile application, Flex automatically applies the mobile theme. As a result, text-based controls use the mobile skins. These skins are optimized for mobile applications, but they do not support the following features of the standard Spark skins:

- TLF
- Bi-directionality or mirroring
- Compact Font Format (CFF) fonts for embedding
- RichEditableText for text rendering (instead, mobile skins use StyleableTextField)

Input with soft keyboards

When a user places the focus on a text control that takes input, mobile devices without keyboards display a soft keyboard on the screen. Developers currently do not have control over the configuration of this soft keyboard.

Use the Spark Label control in a mobile application

The Spark Label control is ideally suited to single lines of non-editable, non-selectable text.

The Label control uses FTE, which is not as performant as text controls that have been optimized for mobile applications such as TextInput and TextArea. However, the Label control does not use TLF, so it generally performs better than controls such as RichText and RichEditableText, which do implement TLF.

In general, use Spark Label controls in mobile applications sparingly. Do not use the Spark Label control in skins or item renderers.

Do not use the Label control when you embed fonts in a mobile application, because the Label control uses CFF. Use the TextArea control instead. For more information, see "Embed fonts in a mobile application" on page 136.

Use the Spark TextArea control in a mobile application

The Spark TextArea control is a text-entry control that lets users enter and edit multiple lines of text. The Spark TextArea control has been optimized for mobile applications.

In a mobile application, the TextArea control uses the spark.skins.mobile.TextAreaSkin class for its skin. This skin uses the StyleableTextField class rather than the RichEditableText class for rendering text. As a result, the TextArea control does not support TLF. It supports only a subset of styles that are available on the TextArea control with the desktop Spark skin.

Because the TextArea control does not support TLF, you cannot use the `textFlow`, `content`, or `selectionHighlighting` properties. In addition, you cannot use the following methods:

- `getFormatOfRange()`
- `setFormatOfRange()`

Use the Spark TextInput control in a mobile application

The Spark TextInput control is a text-entry control that lets users enter and edit a single line of text. It has been optimized for mobile applications.

In a mobile application, the TextInput control uses the spark.skins.mobile.TextInputSkin class for its skin. This skin uses the StyleableTextField class rather than the RichEditableText class for rendering text. As a result, the TextInput control does not support TLF. It supports only a subset of styles that are available on the TextInput control with the desktop Spark skin.

In some cases (such as when you want to use an embedded font), replace a Label control with a TextInput control. To make the TextInput control act more like a Label control, set the `editable` and `selectable` properties to `false`. You can also remove the border around a TextInput control by creating a custom skin. For more information, see "Basics of mobile skinning" on page 137.

Use the RichText and RichEditableText controls in a mobile application

Try to avoid using the RichText and RichEditableText controls in mobile applications. These controls do not have mobile skins, and they are not optimized for mobile applications. If you do use these controls, you are using TLF, which is computationally expensive.

MX text controls

You cannot use MX text controls such as MX Text and MX Label in mobile applications. Use the Spark equivalents instead.

Text styles in a mobile application

The styles supported by the StyleableTextField class determine which styles are supported by text controls in the mobile theme.

The following styles are the only styles supported by the TextInput and TextArea classes in a mobile application:

- `textAlign`
- `fontFamily`
- `fontWeight`
- `fontStyle`
- `color`
- `fontSize`
- `textDecoration`
- `textIndent`
- `leading`
- `letterSpacing`

When you use the mobile theme, the Label control supports its standard set of styles.

Text controls in skins and item renderers in a mobile application

Text controls in a mobile application use the mobile theme. In the mobile theme, skins use the StyleableTextField class to render text. This class is in the spark.components.supportClasses.* package.

For example, the mobile TextAreaSkin class defines the the `textDisplay` property as follows:

```
textDisplay = StyleableTextField(createInFontContext(StyleableTextField));
```

When you render text in a custom mobile skin, or create an ActionScript item renderer for use in a mobile application, use the StyleableTextField class. It is optimized for mobile applications.

The StyleableTextField class is a lightweight subclass of the Flash TextField class. It implements the IEditableText interface (which itself extends IDisplayText).

The StyleableTextField class does not implement the IUIComponent or ILayoutElement interfaces, so it cannot be used in MXML directly. It is designed for use in ActionScript skins and ActionScript item renderers.

For more information about skinning mobile components, see "Basics of mobile skinning" on page 137. For more information about ActionScript item renderers, see Create a Spark item renderer in ActionScript.

User interactions with text in a mobile application

You can use gestures such as swipe with text controls. The following example listens for a swipe event, and tells you in which direction the swipe occurred:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- mobile_text/views/TextAreaEventsView.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark" title="TextArea swipe event"
        viewActivate="view1_viewActivateHandler(event)">
    <fx:Declarations>
        <!-- Place non-visual elements (e.g., services, value objects) here -->
    </fx:Declarations>
    <fx:Script>
        <![CDATA[
            import flash.events.TransformGestureEvent;
            import mx.events.FlexEvent;

            protected function swipeHandler(event:TransformGestureEvent):void {
                // event.offsetX shows the horizontal direction of the swipe (1 is right, -1
is left)
                swipeEvent.text = event.type + " " + event.offsetX;
                if (swipeText.text.length == 0) {
                    swipeText.text = "Swipe again to make text go away."
                }
                else {
                    swipeText.text = "";
                }
            }

            protected function view1_viewActivateHandler(event:FlexEvent):void {
                swipeText.addEventListener(TransformGestureEvent.GESTURE_SWIPE,swipeHandler);
            }

        ]]>
    </fx:Script>
    <s:VGroup>
        <s:TextArea id="swipeText" height="379"
            editable="false" selectable="false"
            text="Swipe to make text go away."/>
        <s:TextInput id="swipeEvent" />
    </s:VGroup>

</s:View>
```

Touch+drag gestures always select text, but only if the text control is selectable or editable. In some cases, you might not want to select text when the user performs a touch+drag or swipe gesture on a text control. In this case, either set the `selectable` and `editable` properties to `false` or reset the selection with a call to the `selectRange(0,0)` method in the swipe event handler.

If the text is inside a Scroller, the Scroller will only scroll if the gesture is outside the text component.

Support the screen keyboard in a mobile application

Many devices do not include a hardware keyboard. Instead, these devices use a keyboard that opens on the screen when necessary. The screen keyboard, also called a soft or virtual keyboard, closes after the user enters information, or when the user cancels the operation.

The following figure shows an application using the screen keyboard:

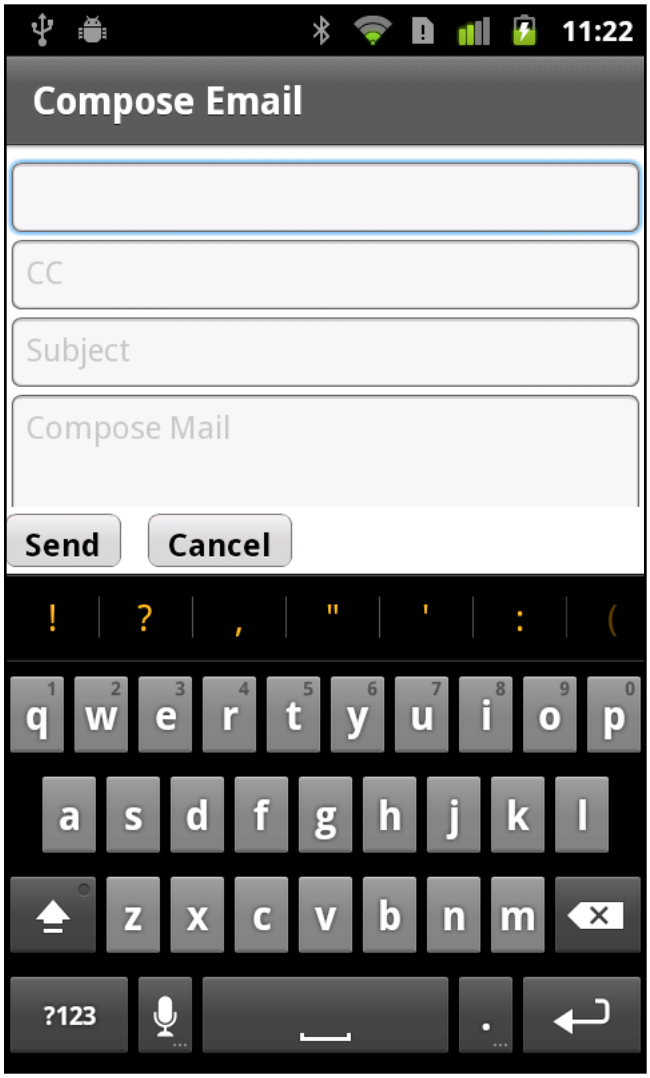

Because the keyboard takes up part of the screen, Flex must ensure that an application still functions in the reduced screen area. For example, the user selects a TextInput control, causing the screen keyboard to open. After the keyboard opens, Flex automatically resizes the application to the available screen area. Flex then scrolls the application so that the selected TextInput control is visible above the keyboard.

Blogger Peter Elst blogged about controlling the soft keyboard in Flex Mobile applications.

User interaction with the screen keyboard

The screen keyboard opens automatically when a text input control receives focus. The text input controls include the TextInput and TextArea controls.

You can configure other types of controls to open the keyboard, such as a Button or ButtonBar control. To open the keyboard when a control other than a text input control receives focus, set the control's `needsSoftKeyboard` property to `true`. All Flex components inherit this property from the InteractiveObject class.

Note: *The text input controls always open the keyboard when receiving focus. They ignore the* `needsSoftKeyboard` *property, and setting it has no effect on the text input controls.*

The keyboard stays open until one of the following actions occurs:

- The user moves focus to a control that does not receive text input.

  If focus moves to another text input control, or to a control with `needsSoftKeyboard` set to `true`, the keyboard stays open.

- The user cancels input by pressing the back button on the device.

Configure the application for the screen keyboard

To support the screen keyboard, the application can perform the following actions when the keyboard opens:

- Resize the application to the remaining available screen space so that the keyboard does not overlap the application.
- Scroll the parent container of the text input control that has focus to ensure that the control is visible.

Configure your system for the screen keyboard

The screen keyboard is not supported in applications running in full screen mode. Therefore, in your app.xml file, ensure that the `<fullScreen>` attribute is set to `false`, the default value.

Ensure that the rendering mode of the application is set to CPU mode. The rendering mode is controlled in the application's app.xml descriptor file by the `<renderMode>` attribute. Ensure that the `<renderMode>` attribute is set to `cpu`, the default value, and not to `gpu`.

Note: *The* `<renderMode>` *attribute is not included by default in the app.xml file. To change its setting, add it as an entry in the* `<initialWindow>` *attribute. If it is not included in the app.xml file, then it has the default value of* `cpu`*.*

Resize the application when the screen keyboard opens

The `resizeForSoftKeyboard` property of the Application container determines the application resizing behavior. If `true`, then the application resizes itself to fit the available screen area when the keyboard opens. The application restores its size when the keyboard closes.

The example below shows the main application file for an application that supports application resizing by setting the `resizeForSoftKeyboard` property to `true`:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\SparkMobileKeyboard.mxml -->
<s:ViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    firstView="views.SparkMobileKeyboardHomeView"
    resizeForSoftKeyboard="true">

</s:ViewNavigatorApplication>
```

To enable application resizing, ensure that the `<softKeyboardBehavior>` attribute in the application's app.xml descriptor file is set to `none`. The default value of the `<softKeyboardBehavior>` attribute is `none`. This default configures AIR to move the entire Stage so that the text component with focus is visible.

Scroll the parent container when the screen keyboard opens

To support scrolling, wrap the parent container of any text input controls in a Scroller component. When a component that opens the keyboard gets focus, the Scroller automatically scrolls the component into view. The component can also be the child of multiple, nested containers of the Scroller component.

The parent container must be a GroupBase or SkinnableContainer container, or a subclass of GroupBase or SkinnableContainer. The component gaining focus must implement the IVisualElement interface, and must be focusable.

By wrapping the parent container in a Scroller component, you can scroll the container while the keyboard is open. For example, a container holds multiple text input controls. You then scroll to each text input control to enter data. The keyboard remains open as long as you select another text input control, or until you select a component with the `needsSoftKeyboard` property set to `true`.

When the keyboard closes, the parent container can be smaller than the available screen space. If the container is smaller than the available screen space, then the Scroller restores the scroll positions to 0, the top of the container.

The following example shows a View container with multiple TextInput controls and a Scroller component:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- containers\mobile\views\SparkMobileKeyboardHomeView.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark"
        title="Compose Email">

    <s:Scroller width="100%" top="10" bottom="50">
        <s:VGroup paddingTop="3" paddingLeft="5" paddingRight="5" paddingBottom="3">
            <s:TextInput prompt="To" width="100%"/>
            <s:TextInput prompt="CC" width="100%"/>
            <s:TextInput prompt="Subject" width="100%"/>
            <s:TextArea height="400" width="100%" prompt="Compose Mail"/>
        </s:VGroup>
    </s:Scroller>

    <s:HGroup width="100%" gap="20"
        bottom="5" horizontalAlign="left">
        <s:Button label="Send" height="40"/>
        <s:Button label="Cancel" height="40"/>
    </s:HGroup>
</s:View>
```

The VGroup container is the parent container of the TextInput controls. The Scroller wraps the VGroup so that each TextInput control appears above the keyboard when it receives focus.

For more information on the Scroller component, see Scrolling Spark containers.

Handle screen keyboard events

The following table describes the events associated with the keyboard:

Event	When dispatched
`softKeyboardActivating`	Just before the keyboard opens
`softKeyboardActivate`	Just after the keyboard opens
`softKeyboardDeactivate`	After the keyboard closes

All Flex components inherit these events from the flash.display.InteractiveObject class.

In an event handler, use the `softKeyboardRect` property of the flash.display.Stage class to determine the size and location of the keyboard on the screen.

On Android, the screen keyboard dispatches `KEY_UP` and `KEY_DOWN` events as the user interacts with it. On iOS, the `KEY_UP` and `KEY_DOWN` events are not dispatched. Instead, you can listen for the `CHANGE` event on the associated text control to respond to keyboard input.

Embed fonts in a mobile application

When you compile a mobile application with embedded fonts, Flex uses non-CFF fonts by default. CFF fonts use FTE. In general, avoid using FTE in a mobile application.

Because the Label control uses FTE (and therefore CFF fonts), use the TextArea or TextInput controls when embedding fonts in a mobile application.

In your CSS, set `embedAsCFF` to `false`, as the following example shows:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- mobile_text/Main.mxml -->
<s:ViewNavigatorApplication xmlns:fx="http://ns.adobe.com/mxml/2009"
                      xmlns:s="library://ns.adobe.com/flex/spark"
                      firstView="views.EmbeddingFontsView">
    <fx:Style>
        @namespace s "library://ns.adobe.com/flex/spark";
        @font-face {
            src: url("../assets/MyriadWebPro.ttf");
            fontFamily: myFontFamily;
            embedAsCFF: false;
        }
        .customStyle {
            fontFamily: myFontFamily;
            fontSize: 24;
        }
    </fx:Style>
</s:ViewNavigatorApplication>
```

The TextArea control in the EmbeddingFontView view applies the type selector:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- mobile_text/EmbeddingFontsView.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark" title="Embedded Fonts">
    <s:TextArea id="ta1"
        width="100%"
        styleName="customStyle"
        text="This is a TextArea control that uses an embedded font."/>

</s:View>
```

If you use class selectors (such as `s|TextArea`) to apply styles (or to embed fonts), define the class selector in the main application file. You cannot define class selectors in a view of a mobile application.

For more information, see Using embedded fonts.

Chapter 6: Skinning

Basics of mobile skinning

Compare desktop and mobile skins

Mobile skins are more lightweight than their desktop counterparts. As a result, they have many differences; for example:

- Mobile skins are written in ActionScript. ActionScript-only skins provide the best performance on mobile devices.
- Mobile skins extend the spark.skins.mobile.supportClasses.MobileSkin class. This class extends UIComponent, as compared to the SparkSkin class which extends the Skin class.
- Mobile skins use compiled FXG or simple ActionScript drawing for their graphical assets to improve performance. Skins for desktop applications, by contrast, typically use MXML graphics for much of their drawing.
- Mobile skins do not need to declare any of the skin states. Because the skins are written in ActionScript, states must be implemented procedurally.
- Mobile skins do not support state transitions.
- Mobile skins are laid out manually. Because mobile skins do not extend Group, they do not support the Spark layouts. As a result, their children are positioned manually in ActionScript.
- Mobile skins do not support all styles. The mobile theme omits some styles based on performance or other differences in the mobile skins.

In addition to performance-related differences, Flash Builder also uses some mobile skin files differently. This is especially true of mobile themes used on library projects. Blogger Jeffry Houser describes how to fix this.

Mobile host component

Mobile skins typically declare a public `hostComponent` property. This property is not required, but is recommended. The `hostComponent` property must be of the same type as the component that uses the skin. For example, the ActionBarSkin declares the `hostComponent` to be of type ActionBar:

```
public var hostComponent:ActionBar;
```

Flex sets the value of the `hostComponent` property when the component first loads the skin.

As with desktop skins, you can use the host component to access properties and methods of the component to which the skin is attached. For example, you could access the host component's public properties or add an event listener to the host component from within the skin class.

Mobile styles

Mobile skins support a subset of style properties that their desktop counterparts support. The mobile theme defines this set of styles.

The following table defines the style properties available to components when using the mobile theme:

Style Property	Supported By	Inheriting/Non-inheriting
`accentColor`	Button, ActionBar, ButtonBar	Inheriting
`backgroundAlpha`	ActionBar	Non-inheriting
`backgroundColor`	Application	Non-inheriting
`borderAlpha`	List	Non-inheriting
`borderColor`	List	Non-inheriting
`borderVisible`	List	Non-inheriting
`chromeColor`	ActionBar, Button, ButtonBar, CheckBox, HSlider, RadioButton	Inheriting
`color`	All components with text	Inheriting
`contentBackgroundAlpha`	TextArea, TextInput	Inheriting
`contentBackgroundColor`	TextArea, TextInput	Inheriting
`focusAlpha`	All focusable components	Non-inheriting
`focusBlendMode`	All focusable components	Non-inheriting
`focusColor`	All focusable components	Inheriting
`focusThickness`	All focusable components	Non-inheriting
`paddingBottom`	TextArea, TextInput	Non-inheriting
`paddingLeft`	TextArea, TextInput	Non-inheriting
`paddingRight`	TextArea, TextInput	Non-inheriting
`paddingTop`	TextArea, TextInput	Non-inheriting
`selectionColor`	ViewMenuItem	Inheriting

All components with text also support the standard text styles such as `fontFamily`, `fontSize`, `fontWeight`, and `textDecoration`.

To see whether the mobile theme supports a style property, open the component's description in the ActionScript Language Reference. Many of these style limitations are because text-based mobile components do not use TLF (Text Layout Framework). Instead, the mobile skins replace TLF-based text controls with more lightweight components. For more information, see "Use text in a mobile application" on page 129.

The mobile theme does not support the `rollOverColor`, `cornerRadius`, and `dropShadowVisible` style properties.

Flex engineer Jason SJ describes styles on mobile skins in his blog.

Mobile skin parts

For skin parts, mobile skins must adhere to the same skinning contract as desktop skins. If a component has a required skin part, then the mobile skin must declare a public property of the appropriate type.

Exceptions

Not all skin parts are required. For example, the Spark Button has optional `iconDisplay` and `labelDisplay` skin parts. As a result, the mobile ButtonSkin class can declare an `iconDisplay` property of type BitmapImage. It can also declare a `labelDisplay` property of type StyleableTextField.

The `labelDisplay` part does not set an `id` property because the styles it uses are all inheriting text styles. Also, the StyleableTextField is not a UIComponent and therefore does not have an `id` property. The `iconDisplay` part does not support styles so it does not set an `id` property either.

Set styles with advanced CSS

If you want to set styles on the skin part with the advanced CSS `id` selector, the skin must also set the skin part's `id` property. For example, the ActionBar's`titleDisplay` skin part sets an `id` property so that it can be styled with advanced CSS; for example:

```
@namespace s "library://ns.adobe.com/flex/spark";
s|ActionBar #titleDisplay {
    color:red;
}
```

Mobile theme

The mobile theme determines which styles a mobile application supports. The number of styles that are available with the mobile theme is a subset of the Spark theme (with some minor additions). You can see a complete list of styles supported by the mobile theme in "Mobile styles" on page 137.

Default theme for mobile applications

The theme for mobile applications is defined in the themes/Mobile/mobile.swc file. This file defines the global styles for mobile applications, as well as the default settings for each of the mobile components. Mobile skins in this theme file are defined in the spark.skins.mobile.* package. This package includes the MobileSkin base class.

The mobile.swc theme file is included in Flash Builder mobile projects by default, but the SWC file does not appear in the Package Explorer.

When you create a new mobile project in Flash Builder, this theme is applied by default.

Change the theme

To change the theme, use the `theme` compiler argument to specify the new theme; for example:

```
-theme+=myThemes/NewMobileTheme.swc
```

For more information on themes, see About themes.

Flex engineer Jason SJ describes how to create and overlay a theme in a mobile application on his blog.

Mobile skin states

The MobileSkin class overrides the states mechanism of the UIComponent class and does not use the view states implementation of desktop applications. As a result, mobile skins only declare the host component's skin states that the skin implements. They change state procedurally, based only on the state name. By contrast, desktop skins must declare all states, regardless of whether they are used. Desktop skins also use the classes in the mx.states.* package to change states.

Most mobile skins implement fewer states than their desktop counterparts. For example, the spark.skins.mobile.ButtonSkin class implements the `up`, `down` and `disabled` states. The spark.skins.spark.ButtonSkin implements all of these states and the `over` state. The mobile skin does not define behavior for the `over` state because that state would not commonly be used on a touch device.

commitCurrentState() method

The mobile skin classes define their state behaviors in the `commitCurrentState()` method. You can add behavior to a mobile skin to support additional states by editing the `commitCurrentState()` method in your custom skin class.

currentState property

The appearance of a skin depends on the value of the `currentState` property. For example, in the mobile ButtonSkin class, the value of the `currentState` property determines which FXG class is used as the border class:

```
if (currentState == "down")
    return downBorderSkin;
else
    return upBorderSkin;
```

For more information about the `currentState` property, see Create and apply view states.

Mobile graphics

Mobile skins typically use compiled FXG for their graphical assets. Skins for desktop applications, by contrast, typically use MXML graphics for much of their drawing.

Embedded bitmap graphics

You can use embedded bitmap graphics in your classes, which generally perform well. However, bitmaps do not always scale well for multiple screen densities. Creating several different assets, one for each screen density, can scale better.

Graphics in the default mobile theme

The mobile skins in the default mobile theme use FXG graphics that are optimized for the target device's DPI. The skins load graphics depending on the value of the root application's `applicationDPI` property. For example, when a CheckBox control is loaded on a device with a DPI of 320, the CheckBoxSkin class uses the spark.skins.mobile320.assets.CheckBox_up.fxg graphic for the `upIconClass` property. At 160 DPI, it uses the spark.skins.mobile160.assets.CheckBox_up.fxg graphic.

The following *desktop* example shows the different graphics used by the CheckBox skin at different DPIs:

```
<?xml version="1.0"?>
<!-- mobile_skins/ShowCheckBoxSkins.mxml -->
<s:Application xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    xmlns:mx="library://ns.adobe.com/flex/mx"
    xmlns:skins160="spark.skins.mobile160.assets.*"
    xmlns:skins240="spark.skins.mobile240.assets.*"
    xmlns:skins320="spark.skins.mobile320.assets.*">
    <s:layout>
        <s:VerticalLayout/>
    </s:layout>

    <!--
    NOTE: You must add the mobile theme directory to source path
    to compile this example.

    For example:
    mxmlc -source-path+=\frameworks\projects\mobiletheme\src\ ShowCheckBoxSkins.mxml
    -->
    <s:Label text="160 DPI" fontSize="24" fontWeight="bold"/>
    <s:HGroup>
        <skins160:CheckBox_down/>
```

```
        <skins160:CheckBox_downSymbol/>
        <skins160:CheckBox_downSymbolSelected/>
        <skins160:CheckBox_up/>
        <skins160:CheckBox_upSymbol/>
        <skins160:CheckBox_upSymbolSelected/>
    </s:HGroup>
    <mx:Spacer height="30"/>
    <s:Label text="240 DPI" fontSize="24" fontWeight="bold"/>
    <s:HGroup>
        <skins240:CheckBox_down/>
        <skins240:CheckBox_downSymbol/>
        <skins240:CheckBox_downSymbolSelected/>
        <skins240:CheckBox_up/>
        <skins240:CheckBox_upSymbol/>
        <skins240:CheckBox_upSymbolSelected/>
    </s:HGroup>
    <mx:Spacer height="30"/>
    <s:Label text="320 DPI" fontSize="24" fontWeight="bold"/>
    <s:HGroup>
        <skins320:CheckBox_down/>
        <skins320:CheckBox_downSymbol/>
        <skins320:CheckBox_downSymbolSelected/>
        <skins320:CheckBox_up/>
        <skins320:CheckBox_upSymbol/>
        <skins320:CheckBox_upSymbolSelected/>
    </s:HGroup>
    <s:Label text="down, downSymbol, downSymbolSelected, up, upSymbol, upSymbolSelected"/>
</s:Application>
```

For more information about resolutions and DPIs in mobile applications, see "Support multiple screen sizes and DPI values in a mobile application" on page 115.

In ActionScript skins, you can also use vectors cached as bitmaps. The only drawback is that you cannot use any transitions that require the pixels to be redrawn, such as alpha transitions. For more information, see www.adobe.com/devnet/air/flex/articles/writing_multiscreen_air_apps.html.

Create skins for a mobile application

When customizing mobile skins, you create a custom mobile skin class. In some cases, you also edit the assets that a mobile skin class uses.

When you edit a mobile skin class, you can change state-based interactions, implement support for new styles, or add or remove child components to the skin. You typically start with the source code of an existing skin and save it as a new class.

You can also edit the assets used by mobile skins to change the visual properties of the skin, such as size, color, or gradients and backgrounds. In this case, you also edit the FXG assets used by the skins. The source *.fxg files used by mobile skins are located in the spark/skins/mobile/assets directory.

Not all visual properties for mobile skins are defined in *.fxg files. For example, the Button skin's background color is defined by the `chromeColor` style property in the ButtonSkin class. It is not defined in an FXG asset. In this case, you would edit the skin class to change the background color.

Create a mobile skin class

When creating a custom mobile skin class, the easiest approach is to use an existing mobile skin class as a base. Then change that class and use it as a custom skin.

To create a custom skin class:

1 Create a directory in your project (for example, customSkins). This directory is the package name for your custom skins. While creating a package is not required, it's a good idea to organize custom skins in a separate package.

2 Create a custom skin class in the new directory. Name the new class whatever you want, such as CustomButtonSkin.as.

3 Copy the contents of the skin class that you are using as a base for the new class. For example, if you are using ButtonSkin as a base class, copy the contents of the spark.skins.mobile.ButtonSkin file into the new custom skin class.

4 Edit the new class. For example, make the following minimum changes to the CustomButtonSkin class:

- Change the package location:

```
package customSkins
//was: package spark.skins.mobile
```

- Change the name of the class in the class declaration. Also, extend the class your new skin is based on, not the base skin class:

```
public class CustomButtonSkin extends ButtonSkin
// was: public class ButtonSkin extends ButtonSkinBase
```

- Change the class name in the constructor:

```
public function CustomButtonSkin()
//was: public function ButtonSkin()
```

5 Change the custom skin class. For example, add support for additional states or new child components. Also, some graphical assets are defined in the skin class itself, so you can change some assets.

To make your skin class easier to read, you typically remove any methods from the custom skin that you do not override.

The following custom skin class extends ButtonSkin and replaces the `drawBackground()` method with custom logic. It replaces the linear gradient with a radial gradient for the background fill.

```
package customSkins {
    import mx.utils.ColorUtil;
    import spark.skins.mobile.ButtonSkin;
    import flash.display.GradientType;
    import spark.skins.mobile.supportClasses.MobileSkin;
    import flash.geom.Matrix;
    public class CustomButtonSkin extends ButtonSkin {

        public function CustomButtonSkin() {
            super();
        }
        private static var colorMatrix:Matrix = new Matrix();
        private static const CHROME_COLOR_ALPHAS:Array = [1, 1];
        private static const CHROME_COLOR_RATIOS:Array = [0, 127.5];

        override protected function drawBackground(unscaledWidth:Number,
unscaledHeight:Number):void {
            super.drawBackground(unscaledWidth, unscaledHeight);

            var chromeColor:uint = getStyle("chromeColor");
            /*
            if (currentState == "down") {
                graphics.beginFill(chromeColor);
            } else {
            */
            var colors:Array = [];
           colorMatrix.createGradientBox(unscaledWidth, unscaledHeight, Math.PI / 2, 0, 0);
            colors[0] = ColorUtil.adjustBrightness2(chromeColor, 70);
            colors[1] = chromeColor;
            graphics.beginGradientFill(GradientType.RADIAL, colors, CHROME_COLOR_ALPHAS,
CHROME_COLOR_RATIOS, colorMatrix);
            // }
            graphics.drawRoundRect(layoutBorderSize, layoutBorderSize,
                unscaledWidth - (layoutBorderSize * 2),
                unscaledHeight - (layoutBorderSize * 2),
                layoutCornerEllipseSize, layoutCornerEllipseSize);
            graphics.endFill();
        }

    }
}
```

6 In your application, apply the custom skin by using one of the methods that are described in "Apply a custom mobile skin" on page 149. The following example uses the `skinClass` property on the component tag to apply the `customSkins.CustomButtonSkin` skin:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- mobile_skins/views/CustomButtonSkinView.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark" title="Home">
    <fx:Declarations>
        <!-- Place non-visual elements (e.g., services, value objects) here -->
    </fx:Declarations>

    <s:Button label="Click Me" skinClass="customSkins.CustomButtonSkin"/>

</s:View>
```

Lifecycle methods of mobile skins

When creating custom skin classes, familiarize yourself with the following UIComponent methods. These inherited, protected methods define a skin's children and members, as well as help it interact with other components on the display list.

- `createChildren()` — Create any child graphics or text objects needed by the skin.
- `commitProperties()` — Copy component data into the skin, if necessary.
- `measure()` — Measure the skin, as efficiently as possible, and store the results in the `measuredWidth` and `measuredHeight` properties of the skin.
- `updateDisplayList()` — Set the position and size of graphics and text. Do any ActionScript drawing required. This method calls the `drawBackground()` and `layoutContents()` methods on the skin.

For more information about using these methods, see Implementing the component.

Common methods to customize in mobile skins

Many mobile skins implement the following methods:

- `layoutContents()` — Positions the children for the skin, such as dropshadows and labels. Mobile skin classes do not support Spark layouts such as HorizontalLayout and VerticalLayout. Lay out the skin's children manually in a method such as `layoutContents()`.
- `drawBackground()` — Renders a background for the skin. Typical uses include drawing `chromeColor`, `backgroundColor` or `contentBackgroundColor` styles based on the shape of the skin. Can also be used for tinting, such as with the `applyColorTransform()` method.
- `commitCurrentState()` — Defines state behaviors for mobile skins. You can add or remove supported states, or change the behavior of existing states by editing this method. This method is called when the state changes. Most skin classes override this method. For more information, see "Mobile skin states" on page 139.

Create custom FXG assets

Most visual assets of mobile skins are defined using FXG. FXG is a declarative syntax for defining static graphics. You can use a graphics tool such as Adobe Fireworks, Adobe Illustrator, or Adobe Catalyst to export an FXG document. Then you can use the FXG document in your mobile skin. You can also create FXG documents in a text editor, although complex graphics can be difficult to write from scratch.

Mobile skins typically use FXG files to define states of a skin. For example, the CheckBoxSkin class uses the following FXG files to define the appearance of its box and checkmark symbol:

- CheckBox_down.fxg
- CheckBox_downSymbol.fxg
- CheckBox_downSymbolSelected.fxg
- CheckBox_up.fxg
- CheckBox_upSymbol.fxg
- CheckBox_upSymbolSelected.fxg

If you open these files in a graphics editor, they appear as follows:

Checkbox states (down, downSymbol, downSymbolSelected, up, upSymbol, and upSymbolSelected)

FXG files for multiple resolutions

Most mobile skins have three sets of FXG graphics files, one for each default target resolution. For example, different versions of all six CheckBoxSkin classes appear in the spark/skins/mobile160, spark/skins/mobile240, and spark/skins/mobile320 directories.

When you create a custom skin, you can do one of the following:

- Use one of default skins as a base (usually 160 DPI). Add logic that scales the custom skin to fit the device the application is running on by setting the `applicationDPI` property on the Application object.
- Create all three versions of the custom skin (160, 240, and 320 DPI) for optimal display.

Some mobile skins use a single set of FXG files for their graphical assets and do not have DPI-specific graphics. These assets are stored in the spark/skins/mobile/assets directory. For example, the ViewMenuItem skins and TabbedViewNavigator button bar skins do not have DPI-specific versions, so all of their FXG assets are stored in this directory.

Customize FXG file

You can open an existing FXG file and customize it, or create one and export it from a graphics editor such as Adobe Illustrator. After you edit the FXG file, apply it to your skin class.

To create a custom skin by modifying an FXG file:

1. Create a custom skin class and put it in the customSkins directory, as described in "Create a mobile skin class" on page 142.
2. Create a subdirectory under the customSkins directory; for example, assets. Creating a subdirectory is optional, but helps to organize your FXG files and skin classes.
3. Create a file in the assets directory and copy the contents of an existing FXG file into it. For example, create a file named CustomCheckBox_upSymbol.fxg. Copy the contents of the spark/skins/mobile160/assets/CheckBox_upSymbol.fxg into the new CustomCheckBox_upSymbol.fxg file.
4. Change the new FXG file. For example, replace the logic that draws a check with an "X" filled with gradient entries:

```
<?xml version='1.0' encoding='UTF-8'?>
<!-- mobile_skins/customSkins/assets/CustomCheckBox_upSymbol.fxg -->
<Graphic xmlns="http://ns.adobe.com/fxg/2008" version="2.0"
    viewWidth="32" viewHeight="32">
    <!-- Main Outer Border -->
    <Rect x="1" y="1" height="30" width="30" radiusX="2" radiusY="2">
        <stroke>
            <SolidColorStroke weight="1" color="#282828"/>
        </stroke>
    </Rect>
    <!-- Replace check mark with an "x" -->
    <Group x="2" y="2">
        <Line xFrom="3" yFrom="3" xTo="25" yTo="25">
            <stroke>
               <LinearGradientStroke caps="none" weight="8" joints="miter" miterLimit="4">
                    <GradientEntry color="#FF0033"/>
                    <GradientEntry color="#0066FF"/>
                </LinearGradientStroke>
            </stroke>
        </Line>
        <Line xFrom="25" yFrom="3" xTo="3" yTo="25">
            <stroke>
            <stroke>
               <LinearGradientStroke caps="none" weight="8" joints="miter" miterLimit="4">
                    <GradientEntry color="#FF0033"/>
                    <GradientEntry color="#0066FF"/>
                </LinearGradientStroke>
            </stroke>
            </stroke>
        </Line>
    </Group>
</Graphic>
```

5 In the custom skin class, import the new FXG class and apply it to a property. For example, in the CustomCheckBox class:

   1 Import the new FXG file:

   ```
   //import spark.skins.mobile.assets.CheckBox_upSymbol;
   import customSkins.assets.CustomCheckBox_upSymbol;
   ```

   2 Add the new asset to the custom skin class. For example, change the value of the `upSymbolIconClass` property to point to your new FXG asset:

   ```
   upSymbolIconClass = CustomCheckBox_upSymbol;
   ```

The complete custom skin class looks like the following:

```
// mobile_skins/customSkins/CustomCheckBoxSkin.as
package customSkins {
    import spark.skins.mobile.CheckBoxSkin;
    import customSkins.assets.CustomCheckBox_upSymbol;

    public class CustomCheckBoxSkin extends CheckBoxSkin {
        public function CustomCheckBoxSkin() {
            super();
            upSymbolIconClass = CustomCheckBox_upSymbol; // was CheckBox_upSymbol
        }
    }
}
```

For information about working with and optimizing FXG assets for skins, see Optimizing FXG.

View FXG files in applications

Because FXG files are written in XML, it can be difficult to visualize what the final product looks like. You can write a Flex application that imports and renders FXG files by adding them as components and wrapping them in a Spark container.

To add FXG files as components to your application, add the location of the source files to your application's source path. For example, to show mobile FXG assets in a web-based application, add the mobile theme to your source path. Then the compiler can find the FXG files.

The following *desktop* example renders the various FXG assets of the CheckBox component when you use it in a mobile application. Add the frameworks\projects\mobiletheme\src\ directory to the compiler's `source-path` argument when you compile this example.

```
<?xml version="1.0"?>
<!-- mobile_skins/ShowCheckBoxSkins.mxml -->
<s:Application xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    xmlns:mx="library://ns.adobe.com/flex/mx"
    xmlns:skins160="spark.skins.mobile160.assets.*"
    xmlns:skins240="spark.skins.mobile240.assets.*"
    xmlns:skins320="spark.skins.mobile320.assets.*">
    <s:layout>
        <s:VerticalLayout/>
    </s:layout>

    <!--
    NOTE: You must add the mobile theme directory to source path
    to compile this example.

    For example:
    mxmlc -source-path+=\frameworks\projects\mobiletheme\src\ ShowCheckBoxSkins.mxml
    -->
    <s:Label text="160 DPI" fontSize="24" fontWeight="bold"/>
    <s:HGroup>
        <skins160:CheckBox_down/>
        <skins160:CheckBox_downSymbol/>
        <skins160:CheckBox_downSymbolSelected/>
        <skins160:CheckBox_up/>
        <skins160:CheckBox_upSymbol/>
        <skins160:CheckBox_upSymbolSelected/>
    </s:HGroup>
```

```
    <mx:Spacer height="30"/>
    <s:Label text="240 DPI" fontSize="24" fontWeight="bold"/>
    <s:HGroup>
        <skins240:CheckBox_down/>
        <skins240:CheckBox_downSymbol/>
        <skins240:CheckBox_downSymbolSelected/>
        <skins240:CheckBox_up/>
        <skins240:CheckBox_upSymbol/>
        <skins240:CheckBox_upSymbolSelected/>
    </s:HGroup>
    <mx:Spacer height="30"/>
    <s:Label text="320 DPI" fontSize="24" fontWeight="bold"/>
    <s:HGroup>
        <skins320:CheckBox_down/>
        <skins320:CheckBox_downSymbol/>
        <skins320:CheckBox_downSymbolSelected/>
        <skins320:CheckBox_up/>
        <skins320:CheckBox_upSymbol/>
        <skins320:CheckBox_upSymbolSelected/>
    </s:HGroup>
    <s:Label text="down, downSymbol, downSymbolSelected, up, upSymbol, upSymbolSelected"/>
</s:Application>
```

Use text in custom mobile skins

To render text in mobile skins, you use the StyleableTextField class. This text class is optimized for mobile applications. It extends the TextField class, and implements the ISimpleStyleClient and IEditableText interfaces.

The mobile skins for several components use the StyleableTextField class, including:

- ActionBar
- Button
- TextArea
- TextInput

For more information about using text controls in mobile applications, see "MX text controls" on page 130.

TLF in mobile skins

For performance reasons, try to avoid classes that use TLF in mobile skins. In some cases, such as with the Spark Label component, you can use classes that use FTE.

Use htmlText in mobile skins

You can set the `htmlText` property directly on an instance of the StyleableTextField class. For more information, see HTML text in mobile text controls.

Define StyleTextField

You typically define the StyleableTextField in the `createChildren()` method of the mobile skin. To instantiate a StyleableTextField object in a mobile skin, use the `UIComponent.createInFontContext()` method, as the following example shows:

```
import spark.components.supportClasses.StyleableTextField;
textDisplay = StyleableTextField(createInFontContext(StyleableTextField));
```

Apply styles to StyleableTextField

In the `createChildren()` method, you typically call the `getStyle()` method on the style properties that you want your StyleableTextField to support in the skin. You also set properties on the skin that you want the StyleableTextField to use; for example:

```
textDisplay.multiline = true;
textDisplay.editable = true;
textDisplay.lineBreak = getStyle("lineBreak");
```

Call the `commitStyles()` method to commit the style information into the text field after calling `setStyle()`. In general, call this method in the skin's `measure()` and `updateDisplayList()` methods.

Add StyleableTextField to display list

After defining the StyleableTextField, you add it to the display list with the `addElement()` method:

```
addElement(textDisplay);
```

You only use the `addElement()` method to add children of mobile skins in Spark groups and containers. Otherwise, you use the `addChild()` method.

Gestures with text

Touch+drag gestures always select text (when text is selectable or editable). If the text is inside a Scroller, the Scroller only scrolls if the gesture is outside the text component. These gestures only work when the text is editable and selectable.

Make text editable and selectable

To make the text editable and selectable, set the `editable` and `selectable` properties to `true`:

```
textDisplay.editable = true;
textDisplay.selectable = true;
```

Bi-directionality with StyleableTextField

Bi-directionality is not supported for text in the StyleableTextField class.

Apply a custom mobile skin

You can apply a custom skin to your mobile component in the same way that you apply a custom skin to a component in a desktop application.

Apply a skin in ActionScript

```
// Call the setStyle() method:
myButton.setStyle("skinClass", "MyButtonSkin");
```

Apply a skin in MXML

```
<!-- Set the skinClass property: -->
<s:Button skinClass="MyButtonSkin"/>
```

Apply a skin in CSS

```
// Use type selectors for mobile skins, but only in the root document:
s|Button {
    skinClass: ClassReference("MyButtonSkin");
}
```

or

```
// Use class selectors for mobile skins in any document:
.myStyleClass {
    skinClass: ClassReference("MyButtonSkin");
}
```

Example of applying a custom mobile skin

The following example shows all three methods of applying a custom mobile skin to mobile components:

```
<?xml version="1.0" encoding="utf-8"?>
<!-- mobile_skins/views/ApplyingMobileSkinsView.mxml -->
<s:View xmlns:fx="http://ns.adobe.com/mxml/2009"
        xmlns:s="library://ns.adobe.com/flex/spark" title="Home">
    <s:layout>
        <s:VerticalLayout/>
    </s:layout>

    <fx:Script>
        <![CDATA[
            import customSkins.CustomButtonSkin;
            private function changeSkin():void {
                b3.setStyle("skinClass", customSkins.CustomButtonSkin);
            }
        ]]>
    </fx:Script>

    <fx:Style>
        @namespace s "library://ns.adobe.com/flex/spark";
        .customButtonStyle {
            skinClass: ClassReference("customSkins.CustomButtonSkin");
        }
    </fx:Style>

    <s:Button id="b1" label="Click Me" skinClass="customSkins.CustomButtonSkin"/>
    <s:Button id="b2" label="Click Me" styleName="customButtonStyle"/>
    <s:Button id="b3" label="Click Me" click="changeSkin()"/>

</s:View>
```

When you use a CSS *type* selector to apply a custom skin, set it in the root mobile application file. You cannot set type selectors in a mobile view, which is the same as a custom component. You can still set styles in ActionScript, MXML, or CSS with a class selector in any view or document in your mobile application.

Chapter 7: Run and debug mobile applications

Manage launch configurations

Flash Builder uses launch configurations when you run or debug mobile applications. You can specify whether to launch the application on the desktop or on a device connected to your computer.

To create a launch configuration, follow these steps:

1 Select Run > Run Configurations to open the Run Configurations dialog.

To open the Debug Configurations dialog, select Run > Debug Configurations. See "Run and debug a mobile application on a device" on page 153.

You can also access the Run or Debug Configurations in the drop-down list of the Run button or the Debug button in the Flash Builder toolbar.

2 Expand the Mobile Application node. Click the New Launch Configuration button in the dialog toolbar.

3 Specify a target platform in the drop-down list.

4 Specify a launch method:

- **On Desktop**

  Runs or debugs the application on your desktop using the AIR Debug Launcher (ADL), according to a device configuration that you have specified. This launch method is not a true emulation of the application running on a device. However, it does let you view the application layout and interact with the application. See "Preview applications with ADL" on page 153.

  Click Configure to edit device configurations. See "Configure device information for desktop preview" on page 152.

- **On Device**

  Installs and runs the application on the device.

  For the Google Android platform, Flash Builder installs the application on your device and launches the application. Flash Builder accesses the device connected to your computer's USB port. See "Run and debug a mobile application on a device" on page 153 for more information.

  Windows requires a USB driver to connect an Android device to your computer. For more information, see "Install USB device drivers for Android devices (Windows)" on page 17.

5 Specify a launch method:

On Desktop You can select from the following launch methods:

- On AIR Simulator

  This launch method runs or debugs the application on your desktop using the AIR Debug Launcher (ADL), according to a device configuration that you have specified. This launch method is not a true emulation of the application running on a device. However, it does let you view the application layout and interact with the application. See "Preview applications with ADL" on page 153.

  Click Configure to edit device configurations. See "Configure device information for desktop preview" on page 152.

- On Native Emulator

  This launch method runs or debugs the application on an emulator. The emulator is a virtual mobile device that runs on your computer, providing a true emulation of the physical device.

  Important: *The On Native Emulator launch method is currently available only for the Google Android platform. Before selecting the On Native Emulator option, ensure that you have created an AVD (Android Virtual Device) and started the Android Emulator. For more information, see Use the Android Emulator.*

On Device Installs and runs the application on the device.

For the Google Android platform, Flash Builder installs the application on your device and launches the application. Flash Builder accesses the device connected to your computer's USB port. See "Run and debug a mobile application on a device" on page 153 for more information.

Windows requires a USB driver to connect an Android device to your computer. For more information, see "Install USB device drivers for Android devices (Windows)" on page 17.

6 Specify whether to clear application data on each launch, if applicable.

Run and debug a mobile application on the desktop

For initial testing or debugging, or if you don't have a mobile device, Flash Builder lets you run and debug applications on the desktop using the AIR Debug Launcher (ADL).

Before you run or debug a mobile application for the first time, you define a launch configuration. Specify the target platform and On Desktop as the launch method. See "Manage launch configurations" on page 151.

Configure device information for desktop preview

The properties of a device configuration determine how the application appears in the ADL and in Flash Builder Design mode.

"Set device configurations" on page 13 lists the supported configurations. Device configurations do not affect the application's appearance on the device.

Screen density

You can preview your application on your development desktop or view the layout of the application in Flash Builder Design mode. Flash Builder uses a screen density of 240 DPI. An application's appearance during preview sometimes differs from its appearance on a device that supports a different pixel density.

Preview applications with ADL

When you preview applications on the desktop, Flash Builder launches the application using the ADL. The ADL provides a Device menu with corresponding shortcuts to emulate buttons on the device.

For example, to emulate the back button on a device, select Device > Back. Select Device > Rotate Left or Device > Rotate Right to emulate rotating the device. Rotate options are disabled if you have not selected auto orientation.

Drag in a list to emulate scrolling the list on a device.

Adobe Certified Expert in Flex, Brent Arnold, created a video tutorial on using ADL to preview a mobile application on the desktop.

Run and debug a mobile application on a device

You can use Flash Builder to run or debug a mobile application from your development desktop or from a device.

You run and debug applications based on a launch configuration that you define. Flash Builder shares the launch configuration between running and debugging the application. When you use Flash Builder to debug an application on a device, Flash Builder installs a debug version of the application on the device.

Note: *If you export a release build to a device, you install a non-debug version of the application. The non-debug version is not suitable for debugging.*

For more information, see Manage launch configurations.

Debug an application on a Google Android device

On an Android device, debugging requires Android 2.2 or later.

You can debug in either of the following scenarios:

Debug over USB To debug an application over a USB connection, you connect the device to the host machine via a USB port. When you debug over USB, Flash Builder always packages the application, then installs and launches it on the device before the debugging starts. Ensure that your device is connected to the host machine's USB port during the entire debugging session.

Debug over a network When you debug an application over the network, the device and the host machine must be on the same network. The device and the host machine can be connected to the network via Wi-Fi, ethernet, or Bluetooth.

When you debug over a network, Flash Builder lets you debug an application that is already installed on a connected device without reinstalling the application. Connect the device to the host machine via a USB port only during packaging and while installing the application on the device. You can unplug the device from the USB port during debugging. However, ensure that there is a network connection between the device and the host machine during the entire debugging session.

Prepare to debug the application

Before you begin debugging over USB or over a network, follow these steps:

1 (Windows) Ensure that the proper USB driver is installed.

On Windows, install the Android USB driver. See the documentation accompanying the Android SDK build for more information. For more information, see "Install USB device drivers for Android devices (Windows)" on page 17.

2 Ensure that USB debugging is enabled on your device.

In device Settings, go to Applications > Development, and enable USB debugging.

Check for connected devices

When you run or debug a mobile application on a device, Flash Builder checks for connected devices. If Flash Builder finds a single connected device online, Flash Builder deploys and launches the application. Otherwise, Flash Builder launches the Choose Device dialog for these scenarios:

- No connected device found
- Single connected device found that is offline or its OS version is not supported
- Multiple connected devices found

If multiple devices are found, the Choose Device dialog lists the devices and their state (online or offline). Select the device to launch.

The Choose Device dialog lists the OS version and the AIR version. If Adobe AIR is not installed on the device, Flash Builder installs it automatically.

Configure network debugging

Follow these steps only if you debug an application over a network.

Prepare to debug over the network

Before you debug an application over the network, follow these steps:

1 On Windows, open port 7935 (Flash Player debugger port) and port 7 (echo/ping port).

For detailed instructions, see this Microsoft TechNet article.

On Windows Vista, deselect the Wireless Network Connection in Windows Firewall > Change Settings > Advanced.

2 On your device, configure wireless settings in Settings > Wireless and Network.

Select a primary network interface

Your host machine can be connected to multiple network interfaces simultaneously. However, you can select a primary network interface to use for debugging. You select this interface by adding a host address in the Android APK package file.

1 In Flash Builder, open Preferences.

2 Select Flash Builder > Target Platforms.

The dialog lists all the network interfaces available on the host machine.

3 Select the network interface that you want to embed in the Android APK package.

Ensure that the selected network interface is accessible from the device. If the device cannot access the selected network interface while it establishes a connection, Flash Builder displays a dialog requesting the IP address of the host machine.

Debug the application

1 Connect the device over a USB port or over a network connection.

2 Select Run > Debug Configurations to configure a launch configuration for debugging.

- For the Launch Method, select On Device.
- Select Debug via USB or Debug via Network.

  The first time that you debug the application over a network, you can install the application on the device over USB. To do so, select Install The Application On The Device Over USB, and connect the device to the host machine via a USB port.

  Once the application is installed, if you don't want to connect over USB for subsequent debugging sessions, deselect Install The Application On The Device Over USB.
- (Optional) Clear application data on each launch.

  Select this option if you want to keep the state of the application for each debugging session. This option applies only if sessionCachingEnabled is set to True in your application.

3 Select Debug to begin a debugging session.

The debugger launches and waits for the application to start. The debugging session starts when the debugger establishes a connection with the device.

When you try to debug on a device over a network, the application sometimes displays a dialog requesting an IP address. This dialog indicates that the debugger could not connect. Ensure that the device is properly connected to the network, and that the computer running Flash Builder is accessible from that network.

Note: *On a corporate, hotel, or other guest network, sometimes the device cannot connect to the computer, even if the two are on the same network.*

If you are debugging via network, and the application was previously installed on the device, start debugging by typing the IP address of the host machine.

Adobe Certified Expert in Flex, Brent Arnold, created a video tutorial about debugging an application over USB for an Android device.

More Help topics

Debug and Package Apps for Devices (video)

Debug an application on an Apple iOS device

To debug an application on an Apple iOS device, deploy and install your debug iOS package (IPA file) on the iOS device manually. Auto-deployment is not supported for the Apple iOS platform.

Important: *Before you debug an application on an iOS device, ensure that you follow the steps described in "Prepare to build, debug, or deploy an iOS application" on page 19.*

1 Connect the Apple iOS device to your development computer.

2 Launch iTunes on your iOS device.

Note: *You need iTunes to install your application on your iOS device and to obtain the device ID of your iOS device.*

3 In Flash Builder, select Run > Debug Configurations.

4 In the Debug Configurations dialog, follow these steps:

a Select the application that you want to debug.

b Select the target platform as Apple iOS.

c Select the launch method as On Device.

d Select one of the following packaging methods:

Standard Use this method to package a release-quality version of your application that can run on Apple iOS devices. The application performance with this method is similar to the performance of the final release package and can be submitted to the Apple App Store.

However, this method of creating a debug iOS (IPA) file takes several minutes.

Fast Use this method to create an IPA file quickly, and then run and debug the file on the device. This method is suitable for application testing purposes. The application performance with this method is not release quality, and it is not suitable for submission to the Apple App Store.

e Click Configure to select the appropriate code signing certificate, provisioning file, and package contents.

f Click Configure Network Debugging to select the network interface that you want to add in the debug iOS package.

Note: *Your host machine can be connected to multiple network interfaces simultaneously. However, you can select a primary network interface to use for debugging.*

g Click Debug. Flash Builder displays a dialog requesting for a password. Enter your P12 certificate password.

Flash Builder generates the debug IPA file and places it in the bin-debug folder.

5 On your iOS device, follow these steps:

1 (Optional) In iTunes, select File > Add To Library, and browse to the mobile provisioning profile file (.mobileprovision filename extension) that you obtained from Apple.

2 In iTunes, select File > Add To Library, and browse to the debug IPA file that you generated in step 4.

3 Sync your iOS device with iTunes by selecting File > Sync.

4 Flash Builder attempts connection to the host address specified in the debug IPA file. If the application cannot connect to the host address, Flash Builder displays a dialog requesting the IP address of the host machine.

Note: *If you have not changed your code or assets since the last debug IPA package was generated, Flash Builder skips the packaging and debugs the application. That is, you can launch the installed application on your device and click Debug to connect to the Flash Builder debugger. This way, you can debug repeatedly without packaging the application every time.*

Chapter 8: Package and export a mobile application

Use Flash Builder's Export Release Build feature to package and export the release build of a mobile application. A release build is generally the final version of the application that you want to upload or try on a device.

You can export a platform-specific application package for later installation on a device. The resulting package can be deployed and installed in the same way as a native application.

Exporting the application with embedded AIR runtime

When you use the Export Release Build feature to export a mobile application, you can choose to embed the AIR runtime within the application package. Users can then run the application even on a device that does not already have AIR installed on it.

Depending on the platform to which you are exporting the package, you can use an embedded runtime or a shared runtime.

Export Android APK packages for release

Before you export a mobile application, you can customize the Android permissions. Customize the settings manually in the application descriptor file. These settings are in the `<android>` block of the bin-debug/*app_name*-app.xml file. For more information, see Setting AIR application properties.

If you export the application for later installation on a device, install the application package using the tools provided by the device's OS provider.

1. In Flash Builder, select Project > Export Release Build.
2. Select the project and application that you want to export.
3. Select the target platforms and the location to export the project.
4. Export and sign a platform-specific application package.

   You can package your application with a digital signature for each target platform or as a digitally signed AIR application for the desktop.

   You can also export the application as intermediate AIRI file that can be signed later. If you select that option, use the AIR adt command line tool later to package the AIRI as an APK file. Then install the APK file on the device using platform-specific tools (for example, with the Android SDK, use adb). For information on using command line tools to package your application, see "Develop and deploy a mobile application on the command line" on page 161.

5 On the Packaging Settings page, you can select the digital certificate, package contents, and any native extensions.

Deployment If you also want to install the application on a device, click the Deployment page and select Install And Launch Application On Any Connected Devices. Ensure that you have connected one or more devices to your computer's USB ports.

- **Export application with embedded AIR runtime**

  Select this option if you want to embed the AIR runtime within the APK file while exporting the application package. Users can then run the application even on a device that does not have AIR already installed on it.

- **Export application that uses a shared runtime**

  Select this option if you do not want to embed the AIR runtime within the APK file while exporting the application package. You can select or specify a URL to download Adobe AIR for the application package if AIR is not already installed on a user's device.

  The default URL points to the Android Market. You can, however, override the default URL and select the URL that points to a location on the Amazon App Store, or enter your own URL.

Digital Signature Click the Digital Signature tab to create or browse to a digital certificate that represents the application publisher's identity. You can also specify a password for the selected certificate.

If you create a certificate, the certificate is *self-signed*. You can obtain a commercially signed certificate from a certificate provider. See Digitally sign your AIR applications.

Package Contents (Optional) Click the Package Contents tab to specify which files to include in the package.

Native Extensions (Optional) Select the native extensions that you want to include in the application package.

For more information about native extensions, see "Develop ActionScript extensions" on page 11.

6 Click Finish.

Flash Builder creates `ApplicationName.apk` in the directory specified in the first panel (the default is the top level of your project). If the device was connected to your computer during export, Flash Builder installs the application on the device.

Adobe Certified Expert in Flex, Brent Arnold, created a video tutorial about exporting a mobile application for the Android platform.

Export Apple iOS packages for release

You can create and export an iOS package for ad hoc distribution or for submission to the Apple App Store.

Important: *Before exporting an iOS package, ensure that you obtain the required certificates and a distribution provisioning profile from Apple. To do so, follow the steps described in "Prepare to build, debug, or deploy an iOS application" on page 19.*

1 In Flash Builder, select Project > Export Release Build.

2 Select Apple iOS as the target platform to export and sign an IPA package.

Click Next.

3 Select the P12 certificate and the distribution provisioning profile that you obtained from Apple.

4 On the Packaging Settings page, you can select the provisioning certificate, digital certificate, package contents, and any native extensions.

Deployment When you export an iOS package, the AIR runtime is embedded within the IPA file by default.

Digital Signature Select the P12 certificate and the distribution provisioning profile that you obtained from Apple.

You can select one of the following package types:

- **Ad Hoc Distribution For Limited Distribution** For a limited distribution of the application
- **Final Release Package For Apple App Store** To submit the application to the Apple App Store

Package Contents (Optional) Click the Package Contents tab to specify which files to include in the package.

Native Extensions (Optional) Select the native extensions that you want to include in the application package.

For more information about native extensions, see "Develop ActionScript extensions" on page 11.

5 Click Finish.

Flash Builder validates the configuration of the package settings and then compiles the application. Once the packaging is complete, you can install the IPA file on a connected Apple iOS device or submit to the Apple App Store.

Adobe Developer Evangelist, Serge Jespers, explains how to build and export iOS applications using Flash Builder.

To package the IPA file using the AIR Developer Tool (ADT), see iOS packages in *Building AIR Applications*.

Chapter 9: Deploy

Deploy an application on a mobile device

Deploy an application on a Google Android device

You can use Flash Builder to deploy and install an application directly on an Android device. When you install a package on a device on which Adobe AIR is not installed, Flash Builder installs AIR automatically.

1 Connect the Google Android device to your development computer.

Flash Builder accesses the device connected to your computer's USB port. Ensure that you have configured the necessary USB device drivers. See "Connect Google Android devices" on page 16

2 In Flash Builder, select Run > Run Configurations. In the Run Configurations dialog box, select the mobile application that you want to deploy.

3 Select the launch configuration method as On Device.

4 (Optional) Specify whether to clear application data on each launch.

5 Click Apply.

Flash Builder deploys and launches the application on your Android device.

Adobe Certified Expert in Flex, Brent Arnold, created a video tutorial on setting up and running your application on an Android device.

Deploy an application on an Apple iOS device

On an iOS device, you deploy and install an application (IPA file) manually, because the Apple iOS platform does not support auto-deployment.

Important: *Before you deploy an application on an iOS device, ensure that you follow the steps described in "Prepare to build, debug, or deploy an iOS application" on page 19.*

1 Connect the Apple iOS device to your development computer.

2 Launch iTunes on your development computer.

Note: *You need iTunes to install your application on your iOS device and to obtain the Unique Device Identifier (UDID) of your iOS device.*

3 In Flash Builder, select Run > Run Configurations.

4 In the Run Configurations dialog, follow these steps:

a Select the application that you want to deploy.

b Select the target platform as Apple iOS.

c Select the launch method as On Device.

d Select one of the following packaging methods:

Standard Use this method to package a release-quality version of your application that can run on Apple iOS devices.

The Standard method of packaging translates the bytecode of the application's SWF file into ARM instructions before packaging. Because of this additional translation step before packaging, this method of creating an application (IPA) file takes several minutes. The Standard method takes longer than the Fast method. However, the application performance with the Standard method is release-quality, and it is suitable for submission to the Apple App Store.

Fast Use this method to create an IPA file quickly.

The Fast method of packaging bypasses the translation of bytecode and just bundles the application SWF file and assets with the pre-compiled AIR runtime. The Fast method of packaging is quicker than the Standard method. However, the application performance with the Fast method is not release-quality, and it is not suitable for submission to the Apple App Store.

Note: *There are no runtime or functional differences between the Standard and Fast methods of packaging.*

e Click Configure to select the appropriate code signing certificate, provisioning file, and package contents.

f Click Run. Flash Builder displays a dialog requesting a password. Enter your P12 certificate password.

Flash Builder generates the IPA file and places it in the bin-debug folder.

5 On your development computer, follow these steps:

1 In iTunes, select File > Add To Library, and browse to the mobile provisioning profile file (.mobileprovision filename extension) that you obtained from Apple.

You can also drag-and-drop the mobile provisioning profile file into iTunes.

2 In iTunes, select File > Add To Library, and browse to the IPA file that you generated in step 4.

You can also drag-and-drop the IPA file into iTunes.

3 Sync your iOS device with iTunes by selecting File > Sync.

The application is deployed on your iOS device and you can launch it.

Develop and deploy a mobile application on the command line

You can create a mobile application without Flash Builder. You use the mxmlc, adl, and adt command line tools instead.

Here is the general process for developing and deploying a mobile application to a device using command line tools. Each of these steps is described in more detail later:

1 Compile the application with the mxmlc tool.

```
mxmlc +configname=airmobile MyMobileApp.mxml
```

This step requires that you pass the `configname` parameter set to “airmobile”.

2 Test the application in AIR Debug Launcher (ADL) with the adl tool.

```
adl MyMobileApp-app.xml -profile mobileDevice
```

This step requires that you create an application descriptor file and pass it as an argument to the adl tool. You also specify the `mobileDevice` profile.

3 Package the application using the adt tool.

```
adt -package -target apk SIGN_OPTIONS MyMobileApp.apk MyMobileApp-app.xml MyMobileApp.swf
```

This step requires that you first create a certificate.

4 Deploy the application to your mobile device. To deploy your application to an Android device, you use the adb tool.

```
adb install -r MyMobileApp.apk
```

This step requires that you first connect your mobile device to your computer via USB.

Compile a mobile application with mxmlc

You can compile mobile applications with the mxmlc command-line compiler. To use mxmlc, pass the `configname` parameter the value `airmobile`; for example:

```
mxmlc +configname=airmobile MyMobileApp.mxml
```

By passing `+configname=airmobile`, you instruct the compiler to use the airmobile-config.xml file. This file is in the sdk/frameworks directory. This file performs the following tasks:

- Applies the mobile.swc theme.
- Makes the following library path changes:
  - Removes libs/air from the library path. Mobile applications do not support the Window and WindowedApplication classes.
  - Removes libs/mx from the library path. Mobile applications do not support MX components (other than charts).
  - Adds libs/mobile to the library path.
- Removes the ns.adobe.com/flex/mx and www.adobe.com/2006/mxml namespaces. Mobile applications do not support MX components (other than charts).
- Disables accessibility.
- Removes RSL entries; mobile applications do not support RSLs.

The mxmlc compiler generates a SWF file.

Test a mobile application with adl

You can use AIR Debug Launcher (ADL) to test a mobile application. You use ADL to run and test an application without having to first package and install it on a device.

Debug with the adl tool

ADL prints trace statements and runtime errors to the standard output, but does not support breakpoints or other debugging features. You can use an integrated development environment such as Flash Builder for complex debugging issues.

Launch the adl tool

To launch the adl tool from the command line, pass your mobile application's application descriptor file and set the `profile` parameter to `mobileDevice`, as the following example shows:

```
adl MyMobileApp-app.xml -profile mobileDevice
```

The `mobileDevice` profile defines a set of capabilities for applications that are installed on mobile devices. For specific information about the `mobileDevice` profile, see Capabilities of different profiles.

Create an application descriptor

If you did not use Flash Builder to compile your application, you create the application descriptor file manually. You can use the /sdk/samples/descriptor-sample.xml file as a base. In general, at a minimum, make the following changes:

- Point the `<initialWindow><content>` element to the name of your mobile application's SWF file:

```
<initialWindow>
    <content>MyMobileApp.swf</content>
    ...
</initialWindow>
```

- Change the title of the application, because that is how it appears under the application's icon on your mobile device. To change the title, edit the `<name><text>` element:

```
<name>
    <text xml:lang="en">MyMobileApp by Nick Danger</text>
</name>
```

- Add an `<android>` block to set Android-specific permissions for the application. Depending on what services your device uses, you can often use the following permission:

```
<application>
    ...
    <android>
        <manifestAdditions>
            <![CDATA[<manifest>
                <uses-permission android:name="android.permission.INTERNET"/>
            </manifest>]]>
        </manifestAdditions>
    </android>
</application>
```

You can also use the descriptor file to set the height and width of the application, the location of icon files, versioning information, and other details about the installation location.

For more information about creating and editing application descriptor files, see AIR application descriptor files.

Package a mobile application with adt

You use AIR Developer Tool (ADT) to package mobile applications on the command line. The adt tool can create an APK file that you can deploy to a mobile Android device.

Create a certificate

Before you can create an APK file, create a certificate. For development purposes, you can use a self-signed certificate. You can create a self-signed certificate with the adt tool, as the following example shows:

```
adt -certificate -cn SelfSign -ou QE -o "Example" -c US 2048-RSA newcert.p12 password
```

The adt tool creates the newcert.p12 file in the current directory. You pass this certificate to adt when you package your application. Do not use self-signed certificates for production applications. They only provide limited assurance to users. For information on signing your AIR installation files with a certificate issued by a recognized certification authority, see Signing AIR applications.

Create the package file

To create the APK file for Android, pass the details about the application to the adt tool, including the certificate, as the following example shows:

```
adt -package -target apk -storetype pkcs12 -keystore newcert.p12 -keypass password
MyMobileApp.apk MyMobileApp-app.xml MyMobileApp.swf
```

The output of the adt tool is an *appname*.apk file.

Package for iOS

To package mobile applications for iOS, you must get a developer certificate from Apple, as well as a provisioning file. This requires that you join Apple's developer program. For more information, see "Prepare to build, debug, or deploy an iOS application" on page 19.

Flex evangelist Piotr Walczyszyn explains how to package the application with ADT using Ant for iOS devices.

Blogger Valentin Simonov provides additional information about how to publish your application on iOS.

Deploy a mobile application to a device with adb

You use Android Debug Bridge (adb) to deploy the APK file to a mobile device running Android. The adb tool is part of the Android SDK.

Connect the device to a computer

Before you can run adb to deploy the APK on your mobile device, connect the device to your computer. On Windows and Linux systems, connecting a device requires the USB drivers.

For information on installing USB drivers for your device, see Using Hardware Devices.

Deploy application on a local device

After you connect the device to your computer, you can deploy the application to the device. To deploy the application with the adb tool, use the `install` option and pass the name of your APK file, as the following example shows:

```
adb install -r MyMobileApp.apk
```

Use the `-r` option to overwrite the application if you have previously installed it. Otherwise, you must uninstall the deployed application each time you want to deploy a newer version to the mobile device.

Deploy application in online stores

Lee Brimlow shows how to deploy a new AIR for Android application to the Android Market.

Christian Cantrell explains how to deploy the application to the Amazon Appstore for Android.

More Help topics

Android Debug Bridge